

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
23 October 2003 (23.10.2003)

PCT

(10) International Publication Number
WO 03/088615 A2

- (51) International Patent Classification⁷: **H04L 29/06**
- (21) International Application Number: PCT/JP03/04898
- (22) International Filing Date: 17 April 2003 (17.04.2003)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
2002-115861 18 April 2002 (18.04.2002) JP
2003-108846 14 April 2003 (14.04.2003) JP
- (71) Applicant (for all designated States except US): **MATSUSHITA ELECTRIC INDUSTRIAL CO., LTD.** [JP/JP]; 1006, Oaza Kadoma, Kadoma-shi, Osaka 571-8501 (JP).
- (72) Inventors; and
- (75) Inventors/Applicants (for US only): **FUNABIKI, Makoto** [JP/JP]; 3-33-17, Sugao, Miyamae-ku, Kawasaki-shi, Kanagawa 216-0015 (JP). **IKEDA, Shinkichi** [JP/JP]; 11-5-105, Omaru, Tsuzuki-ku, Yokohama-shi, Kanagawa 224-0061 (JP). **MATSUMOTO, Taisuke** [JP/JP]; 2-12-14-705, Kitasaiwai, Nishi-ku,

Yokohama-shi, Kanagawa 220-0004 (JP). **KIMURA, Yasunari** [JP/JP]; 34-19-G309, Chigusadai, Aoba-ku, Yokohama-shi, Kanagawa 227-0051 (JP). **KOBAYASHI, Hirokazu** [JP/JP]; 224-1-102, Gorikida, Asao-ku, Kawasaki-shi, Kanagawa 215-0025 (JP).


(74) Agents: **IWAHASHI, Fumio** et al.; c/o Matsushita Electric Industrial Co., Ltd., 1006, Oaza Kadoma, Kadoma-shi, Osaka 571-8501 (JP).

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO,

[Continued on next page]

(54) Title: MOBILE NODE AND METHOD FOR MOBILE COMMUNICATIONS

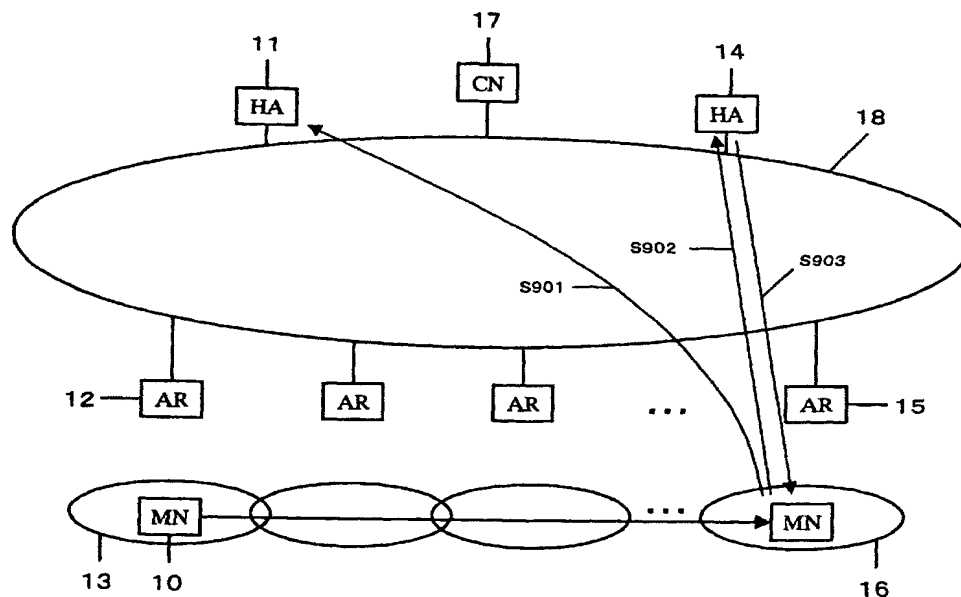

(57) Abstract: In a mobile communication system supported with IP version 6, a mobile node (10) measures at least one of a hop number or communication delay time to a belonging home agent (11). When the result of measurement is equal to or greater than a predetermined value, registration deletion is requested to the belonging home agent (11) while registration is requested to a new home agent (14). The belonging home agent (11) deletes the registration of mobile node (10), and the new home agent (14) registers the mobile node. This can reduce the load on an IP network (18) and decrease data delay.



SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

Published:

— *without international search report and to be republished upon receipt of that report*

DESCRIPTION

Mobile node and Method for Mobile Communications

5 TECHNICAL FIELD

This invention relates to a method and apparatus for mobile communications supported with IP version 6 (hereinafter referred to as "IPv6") in order for communications with another communication node through the use of the same address while the
10 mobile node is connected with the other than the home link.

BACKGROUND ART

Conventionally, there are such mobile communication methods including a description in JP-A-2001-237764, for example.
15 Fig. 33 shows a conventional mobile communication method described in JP-A-2001-237764.

In Fig. 33, a radio station comprises hop-number information acquiring means 3301 for acquiring hop-number information from an accessible radio station, preferentially-
20 accessing radio station selecting means 3302 for selecting preferentially-accessing radio stations, or relay points, out of accessible radio stations according to the hop-number information, and signal transfer means 3303 for transferring a transmission signal or a signal received from a slave radio station to a
25 preferentially-accessing radio station or base station..

In the conventional configuration, however, when the radio

station, or mobile node, is distant far from a home agent, a shortest path is selected out of the paths for exchange of packets between the mobile node and the home agent. The distance to the home agent becomes long too in order for a home agent's position
5 not to change. Therefore, there is a drawback that the load over the network is increased by the control packets, such as binding update messages, to be sent by the mobile node to the home agent in order to register primary care-of addresses. Because the packets will pass a long-distance course. Meanwhile, where the
10 distance increases between the home agent and the mobile node, it takes a long time in registering the care-of address. This results in a problem of packet loss and delay increase.

Furthermore, where the resource is deficient for the home agent or the mobile node moves out of the range under control of
15 the home agent, there is a problem that it is impossible to swiftly change the home agent of each node.

DISCLOSURE OF THE INVENTION

It is an object of the present invention to provide a method
20 and apparatus for mobile communications which reduces the loss and delay of control packets, upon handover, between the mobile node and the home agent and relieves the load on the home agent.

A method of mobile communications of the invention, for solving the above-described problem, is that, in a mobile
25 communication system supporting IPv6, the mobile node can change the current home agent with a home agent existing closer when the

mobile node and the home agent are far in distance.

This reduces the load on the network for control packet transfer and shortens the time required in registering care-of addresses, thereby reducing the loss and delay of packets. Also, change of the home agent because of the reason of resource deficiency or control range of the home agent can be swiftly performed.

A mobile node according to the invention comprises: a measuring section for measuring at least any one of a hop number and communication delay time to a home agent; a home agent information acquiring section for acquiring information about a home agent as a subject of measurement of the measuring section; and a home agent selecting section for changing, when a measurement value to the home agent to which the mobile node belongs becomes equal to or greater than a first predetermined value, the belonging home agent into the new home agent, by using the information which acquired in the acquiring section, having a measurement value equal to or less than a second predetermined value.

Due to this, a change is performed to a home agent smaller in hop number or communication delay time, to shorten the path for control packet transfer. This can decrease the load over the entire network.

Also, a measuring section of the invention, in a case that the mobile node is in real-time communication with another node, measures a communication delay time to the home agent to change,

the belonging home agent by one having a communication delay equal to or smaller than a fourth predetermined value when a communication delay to the belonging home agent becomes equal to or greater than a third predetermined value; and in the case of not so, the measuring section measures a hop number to the home agent to change, the belonging home agent by one having a hop number equal to or smaller than a second predetermined value when a hop number to the belonging home agent becomes equal to or greater than a first predetermined value,.

Due to this, in usual time, a change of home agent is possible taking into account a hop number of between the mobile node and the home agent. In real-time communication, a change of home agent is possible taking into account a communication delay time. Accordingly, it is possible to implement communications optimized in respect of network load and communication delay time.

Also, the measuring section of a mobile node of the invention determines the hop number by computing a difference between an initial value of a hop limit field in a header of a packet of IP version 6 sent from the home agent and a value of the hop limit field received.

Due to this, it is possible to measure a hop number of from the home agent over to the mobile node.

Also, the measuring section of a mobile node of the invention determines the communication delay time by measuring a time of from sending an ICMP echo request packet to the home agent to receiving an ICMP echo reply packet.

Due to this, it is possible to measure a round trip time, hence enabling to estimate a distance of from the home agent to the mobile node.

Also, the measuring section of a mobile node of the invention increases a measuring frequency of communication delay time when the moving speed of the mobile node is high, and decreases the measuring frequency when the moving speed is low.

Due to this, the transmission frequency of ICMP echo request packets is changed by a moving speed of mobile node. Accordingly, even when the moving speed is high, it is possible to follow up a change of distance between the home agent and the mobile node. When the moving speed is low, it is possible to suppress useless traffic flowing over the network.

Also, the measuring section of a mobile node of the invention sends an ICMP echo request packet when the number of times of connection changes to the access router becomes an integer times a fifth predetermined value.

Due to this, ICMP echo request packets are sent based on the number of times of access router changes, in view of the point that, when the moving speed of mobile node is high, there are frequent changes of access router while, when the moving speed of mobile node is low, there are less changes of access router. Accordingly, it is possible to suppress useless traffic from flowing over the network.

A home agent according to the invention comprises: a home agent information notifying section for answering a registration

refusal in a case that, when receiving a registration request from a mobile node, the home agent is deficient in unoccupied resource.

This can prevent the communication trouble due to resource deficiency.

5 Also, a home agent of the invention further comprises a home agent information storing section for storing home agent information including an address and current resource information of another home agent, wherein the home agent information notifying section answers the registration refusal and selects
10 a home agent suited for a predetermined condition from the home agent information storing section to thereby answer home agent information of the selected home agent.

Due to this, because an alternative home agent is introduced, the mobile node can find another home agent in a brief time.

15 Also, a home agent according to the invention is selected based on the predetermined condition at least any of a maximum in unoccupied resource and a minimum in load.

Due to this, because selection is not made for a home agent deficient in unoccupied resource or excessive in load, it is
20 possible to prevent the communication trouble due to those.

Also, a home agent according to the invention comprises:
a home agent information notifying section for answering a registration refusal in a case that, when received a registration request from a mobile node, the mobile node entered a
25 predetermined sub-network.

Due to this, it is possible to prevent managing a mobile

node existing on a sub-network not suited for being managed.

Also, a home agent of the invention further comprises a home agent information storing section for storing home agent information including an address of another home agent, wherein
5 the home agent information notifying section answers the registration refusal and selects a home agent having as a control range the sub-network from the home agent information storing section to thereby answer home agent information of the selected home agent.

10 Due to this, the mobile node can find, in a brief time, a home agent managing a sub-network to be accessed by itself.

Also, in a home agent of the invention, the registration refusal and the home agent information are an addition of a home agent information option to a binding acknowledgement message.

15 Due to this, the home agent information field is added to a binding acknowledgement message. Accordingly, it is possible to know information of a new home agent simultaneously with a refusal message.

Also, a home agent according to the invention comprises:
20 a home agent information notifying section for notifying, when receiving a notification for changing a home agent and an address of a changed-to home agent from a belonging mobile node, the changed-to home agent of an entry content concerning the mobile node of a binding cache.

25 Due to this, because the former home agent transfers a binding cache to the new home agent, the former information can

be taken over after a change of home agent.

An access router according to the invention comprises: a home agent information storing section for storing home agent information including an address of a home agent; and a home agent
5 information notifying section for notifying a mobile node, as a slave, of home agent information about a neighboring home agent stored in the home agent information storing section.

Due to this, because the access router is storing the information of neighboring home agents, the mobile node is allowed
10 to enter a change operation of home agent simultaneously with a change of access router.

Also, the home agent information notifying section of an access router of the invention notifies the mobile node of home agent information when requested from the mobile node.

15 Due to this, because the mobile node requests home agent information, the mobile node can get the information about a new home agent immediately after determining a change of home agent in the mobile node.

Also, the home agent information notifying section of an
20 access router of the invention periodically notifies the mobile node of home agent information.

Due to this, the mobile node is allowed, always, to know neighboring home agent.

A home agent information storing server according to the
25 invention comprises: a home agent information storing section for holding home agent information including an address of a managing

home agent; a home agent information notifying section for notifying at least one of a mobile node, access router and home agent in connection to a network of the home agent information selected from the home agent information storing section.

5 Due to this, because home agent information storing server is storing the information of neighboring home agents, the other communication apparatus is allowed to readily get home agent information.

10 Also, in a home agent information storing server of the invention, the home agent information storing section further holds at least one piece of information of current unoccupied resource and load of the managing home agent.

15 Due to this, the other communication apparatus is allowed to readily get the information about current unoccupied resource and load.

 Also, a home agent information storing server of the invention further comprises a home agent information acquiring section for receiving the information from the managing home agent and updating the home agent information storing section.

20 Due to this, because the home agent sends information to the home agent information storing server, it is easy to get home agent information.

 Also, a home agent of the information further comprises a home agent information acquiring section for acquiring the home agent information from the home agent information storing server according to the invention.

25

Due to this, because the home agent gets home agent information from the home agent information storing server, the home agent can be simplified in configuration.

Also, a home agent of the invention is characterized to send
5 information of own load and unoccupied resource to the home agent information storing server according to the invention.

Due to this, the home agent information storing server is allowed to readily get home agent information.

Also, an access router of the invention further comprises
10 a home agent information acquiring section for getting the home agent information from the home agent information storing server of the invention.

Due to this, because the access router gets home agent information from the home agent information storing server, the
15 access router can be simplified in configuration.

Also, in a mobile node of the invention, the home agent information acquiring section gets the home agent information from the home agent information storing server of the invention.

Due to this, because the mobile node gets home agent
20 information from the home agent information storing server, the mobile node can be simplified in configuration.

Also, the home agent information acquiring section in a mobile node of the invention is notified of information for the home agent from the home agent of the invention.

25 Due to this, the home agent information about a new home agent can be readily known.

Also, the home agent selecting section of a mobile node of the invention selects, preferentially, a home agent satisfying at least any of conditions of greatest unoccupied resource, minimum load, least hop number and shortest communication delay
5 time.

Due to this, the mobile node is allowed to select a home agent best suited for the condition.

A method for mobile communications according to the invention comprises: a step of measuring at least any one of a
10 hop number and communication delay time to a belonging home agent by a mobile node; a step of requesting a belonging home agent to delete registration and a new home agent to make registration, when a result of measurement becomes equal to or greater than a predetermined value; a step of deleting a registration of the
15 mobile node by the belonging home agent; and a step of registering the mobile node by the new home agent.

Also, in a method for mobile communications of the invention, the new home agent is to be selected preferentially a home agent satisfying at least any of conditions of greatest unoccupied
20 resource, minimum load, least hop number and shortest communication delay time.

Also, in a method for mobile communications of the invention, the new home agent is notified from a home agent information managing server for managing information about home agents to the
25 mobile node.

As described above, according to the invention, even where

the mobile node and the home agents are distant in space, network load can be relieved and handover of mobile node is smoothly carried out. Also, it is possible to swiftly eliminate the resource deficiency of home agent and change the control range.

5

BRIEF DESCRIPTION OF THE DRAWINGS

Fig. 1 is a diagram showing a configuration of a mobile communication system and a packet path in a first embodiment of the present invention.

10 Fig. 2 is a diagram of a packet path in the first embodiment of the invention.

Fig. 3 is a configuration diagram of a mobile node in the first embodiment of the invention.

15 Fig. 4 is a flowchart showing a mobile node operation in the first embodiment of the invention.

Fig. 5 is a flowchart showing a mobile node operation in the first embodiment of the invention.

Fig. 6 is a configuration diagram of a mobile node in the first embodiment of the invention.

20 Fig. 7 is a flowchart showing a mobile node operation in the first embodiment of the invention.

Fig. 8 is a configuration diagram of an access router in the first embodiment of the invention.

25 Fig. 9A is a figure showing a home agent information management table in the first embodiment of the invention.

Fig. 9B is a figure showing a home agent information

management table in the first embodiment of the invention.

Fig. 10 is a configuration diagram of a home agent in the first embodiment of the invention.

Fig. 11 is a flowchart showing a home agent operation in the first embodiment of the invention.

Fig. 12 is a diagram showing a packet path in the first embodiment of the invention.

Fig. 13 is a configuration diagram of a mobile communication system in a second embodiment of the present invention.

Fig. 14 is a diagram showing a packet path in a second embodiment of the invention.

Fig. 15A is a flowchart showing a home agent information storing server operation in the second embodiment of the invention.

Fig. 15B is a flowchart showing a mobile node operation, an access router operation, and a home agent operation in the second embodiment of the invention.

Fig. 16 is a configuration diagram of a home agent information storing server in the second embodiment of the invention.

Fig. 17 is a diagram showing a configuration of a mobile communication system and a packet path in a third embodiment of the present invention.

Fig. 18 is a flowchart showing a mobile node operation in the third embodiment of the invention.

Fig. 19 is a flowchart showing a mobile node operation in

the third embodiment of the invention.

Fig. 20 is a configuration diagram of a home agent in the third embodiment of the present invention.

Fig. 21 is a flowchart showing a home agent operation in
5 the third embodiment of the invention.

Fig. 22 is a flowchart showing a home agent operation in the second embodiment of the invention.

Fig. 23 is a diagram showing a prefix table in the third embodiment of the invention.

10 Fig. 24 is a diagram showing a configuration of a mobile communication system and a packet path in a fourth embodiment of the invention.

Fig. 25 is a figure showing a registration/deregistration request message in the first embodiment of the invention.

15 Fig. 26 is a figure showing a registration answer message in the first embodiment of the invention.

Fig. 27 is a figure showing a binding cache information request message in the first embodiment of the invention.

20 Fig. 28 is a figure showing a binding cache information notifying message in the first embodiment of the invention.

Fig. 29 is a figure showing a home agent information request message other than an access router in the invention.

Fig. 30 is a figure showing a home agent information notifying message other than an access router in the invention.

25 Fig. 31 is a figure showing a home agent information request message to an access router in the invention.

Fig. 32 is a figure showing a home agent information notifying message from an access router in the invention.

Fig. 33 is a configuration diagram of a conventional radio station.

5

BEST MODE FOR CARRYING OUT THE INVENTION

The present invention will now be explained in conjugation with the drawings.

(Embodiment 1)

10 Fig. 1 is a configuration diagram of a mobile communication system in embodiment 1 of the present invention.

In Fig. 1, a mobile node 10 is a mobile communication terminal, and home agents 11, 14 are routers to which the mobile node 10 can be allowed to register the current care-of addresses. 15 Access routers 12, 15 are routers accessible to the Internet to which the mobile node 10 can be allowed to access. Control ranges 13, 16 are respective ranges in which the access router 12, 15 can have communications. A correspondent node 17 is a communication terminal for communications with the mobile node 20 10, while an IP network 18 is an electric communication line over which an IP protocol is supported.

With the configuration of Fig. 1, the operation is explained in the below.

First, the mobile node 10 has an access to the access router 25 12 to get a care-of address, and then sends the home agent 11 a binding update message requesting a registration(step S301).

The home agent 11 replies a binding agreement message allowing the mobile node 10 for registration(step S302).

Next, the mobile node 10 moves to have an access to the access router 15, to get a new care-of address. Thereafter, a binding
5 update message is sent to the home agent 11(step S303).

Next, the home agent 11, after receiving the binding update message 303, measures a hop number (the number of router stages to pass) to the mobile node 10 and measures a communication delay time. When the measured hop number value or communication delay
10 time is equal to or greater than a predetermined threshold, the home agent 11 sends the mobile node 10 a binding acknowledgement message instructing for a change of home agent(step S304). Otherwise, when the mobile node 10 receives the binding acknowledgement message (step S304), it is possible to measure
15 a communication delay time together with a hop number to the home agent 11 thereby determining a change of home agent.

Then, when determining a change of home agent, the mobile node 10 sends the access router 15 a home agent request message requesting home agent information, such as an address of a
20 neighboring home agent(step S305).

Next, the access router 15, when receiving the home agent request message (step S305), selects a suitable home agent from a home agent information management table as a set of pieces of home agent information about neighboring home agents being held,
25 and sends the mobile node a home agent information notifying message describing the information about the selected home

agent(step S306).

Then, the mobile node 10, after receiving the home agent information notifying message (step S306), measures a communication delay time together with a hop number to the home agent described in the message. In the case both or any of the measured hop number and communication delay time is equal to or smaller than a predetermined threshold, the mobile node determines a change to that home agent. Herein, explanation is made on a case with a change of from a home agent 11 to home agent 14, by using Fig. 2.

The mobile node 10 sends the home agent 11 a binding update message 3950 that the lifetime field 3922 shown in Fig. 25 is set at '0'(step S901), and a changed-to home agent 14 a binding update message 3950 which is set the home agent registration request flag (H) 3921 requesting for a registration(step S902).

Next, the home agent 11, after receiving the binding update message 3950(step S902), deletes the mobile node of an entry to the old home address. Also, the changed-to home agent 14, after receiving the binding update message 3950(step S902), generates or updates an entry to mobile node 10.

Next, the home agent 11 transmits a binding acknowledge message 4050 which is the registration reply message which notifies having recognized the registration shown in Fig. 26 to the mobile network 10 (Step S903).

Next, explanation is made on the detailed operation of each apparatus.

Fig. 3 is a diagram showing a mobile node 10 configuration. A communicating section 1100 is for wireless-connection to the access router. A data link interface 1101 is to exchange packets with a data link layer. An IP processing section 1102 is to carry out IP processes including mobile IP. A higher layer interface 1103 is to exchange packets with an application section 1110 as a higher layer. A home agent selecting section 1104 is to select one out of a plurality of home agents. A home agent information management storing section 1105 is to store home agent information. A hop-number measuring section 1106 is to measure a hop number to the home agent or correspondent node. A home agent information acquiring section 1107 is to acquire home agent information. A communication delay time measuring section 1108 is to measure a communication delay time to the home agent or correspondent node. An application section 1110 is to provide a service the mobile node possesses.

Next, the operation of the mobile node 10 is explained by using the flowchart of Fig. 1, Fig. 2 and Fig. 4.

When the mobile node 10 moves to a different access router, the communication section 1100 detects a handover and notifies it to the home agent selecting section 1104 (step S1501).

Then, the home agent selecting section 1104 sends the home agent 11 a binding update message 3950(step S1502), and waits for a reception of a binding acknowledgement message 4050 from the home agent 11 (step S1503). Incidentally, Step S1502 corresponds to Step S303 of Fig. 1.

Next, the mobile node 10 receives a binding acknowledgement message 4050 from the home agent 11 (step S1504) and makes sure of whether a home agent change instruction flag 4032 to be set on the home agent 11 has been set or not (step S1505). Herein,
5 the format of binding acknowledgement message 4050 is shown in Fig. 26. Also, the home agent change instruction flag (C) 4032 is to instruct the mobile node to change the home agent. Incidentally, Step S1504 corresponds to Step S304 of Fig. 1.

When this home agent change instruction flag 4032 has not
10 been set, i.e. when a binding acknowledgement message 4050 representative of a successful registration is received, the home agent selecting section 1104 carries out a binding acknowledgement process, such as updating a binding update list (step S1508). Thereafter, the process returns to the step S1501.

15 On the other hand, when receiving a binding acknowledgement message 4050 in which the home agent change instruction flag 4032 has been set, the home agent selecting section 1104 carries out the following home agent selecting process (step S1506).

This selecting process is explained in the below.

20 First, the home agent information acquiring section 1107, in order to acquire the information of a changed-to candidate home agent, sends the access router 15 a home agent information request message (step S305) and waits for a home agent information notifying message as a reply thereto. Fig. 31 shows a format of
25 home agent information request message 4550. This home agent information request message 4550 is an addition of a flag (H) 4501

representative of a request for home agent information to the conventional router solicitation message.

Next, the home agent information acquiring section 1107, after receiving a home agent information notifying message 4650 shown in Fig. 32 from the access router 15 (step S306), holds the content thereof in the home agent information storing section 1105.

Fig. 32 shows a format of home agent information notifying message 4650. As shown in Fig. 30, the home agent information notifying message 4650 is a router advertisement message 4610 which is added with a home agent information option 4040 that includes a home agent information. The home agent information option 4040 contains home agent addresses, resource information, load information and so on.

Meanwhile, in the case that a home agent address and hop number or a communication delay time is included in the home agent information notifying message 4650, the home agent selecting section 1104 decides as a changed-to agent a home agent minimal in hop number or communication delay time of among those included in the message.

Meanwhile, the home agent selecting section 1104 may set a predetermined threshold in a Hop Limit field of an ICMP echo request message so that, when the ICMP echo reply message is sent back, the home agent as a destination can be determined as a changed-to agent.

Incidentally, the home agent selecting section 1104 may

hold, by manual setting, a home agent address of changed-to candidate in the home agent information management table 1105.

Meanwhile, in the case only a home agent address is included in the message, the hop-number measuring section 1106 sends a packet for the hop-number measuring section 1106 to measure a hop number to the address shown in the message. For example, this packet is an ICMP echo request message. As a reply thereto, waited is an ICMP echo reply message from the home agent. IPv6 Base Header 3900 as shown in Fig. 25 is attached to these messages.

10 The hop-number measurement is performed using the Hop Limit field 3901 in this header. Namely the hop-number measuring section 1106 receives the ICMP echo reply message and makes reference to a field (Hop Limit field 3901) representative of a hop number in a received-message IP header, to determine a difference from an

15 initial value set at the hop-number measuring section 1106 thereby measuring a hop number. Otherwise, hop-number measurement is made by using a traceroute command.

Meanwhile, the communication delay time measuring section 1108 measures a communication delay time. This measurement is

20 by that the timer which is not shown in Fig. 3 measures a time of from sending an ICMP echo request message to receiving the ICMP echo reply message.

The home agent selecting section 1104, in case both or any one of the measured hop number and communication delay time is

25 equal to or smaller than a predetermined hop number or communication delay time, determines a change to that home agent.

Also, the home agent selecting section 1104, unless both or any one of the hop number and communication delay time for all the addresses included in a home agent information option 4040 of the home agent information notifying message 4650 is equal to or less
5 than a predetermined hop number or communication delay time, determines as a changed-to agent a home agent smallest in the hop number or communication delay time including the current home agent or otherwise does not make a change of home agent. Incidentally, the home agent selecting section 1104, in case only
10 one home agent address is included in the home agent information notifying message 4650, determines that home agent as a changed-to agent.

The above is the home agent selection process (step S1506).

Next, the home agent selecting section 1104, after
15 selecting a changed-to home agent 14, carries out the below home agent change process (step S1507).

First, the home agent selecting section 1104 sends, to the home agent 14 determined as a changed-to agent, ICMP mobile prefix request message to request a home prefix which is subnetwork
20 prefix of a home link, thus waiting for a ICMP mobile prefix advertising message.

Next, the home agent selecting section 1104, after receiving a home prefix notifying message, generates a home address.

25 Thereafter, as shown in Fig. 2, the home agent selecting section 1104 sends the home agent 11 a binding update message 3950

(step S901) that a formerly-used home address is set to the home address destination option and a Lifetime field 3992 is set at '0', and further sends the changed-to home agent 14 a binding update message 3950 of home registration (step S902).

5 The above is the home agent changing process (step S1507).
Thereafter, the process returns to step S1501.

 This embodiment shows the case that the home agent measured a hop number and communication delay time, to notify a change of home agent to the mobile node 10. However, the measurement of
10 a hop number and communication delay time can be on the mobile node 10. The operation in such a case is explained by the use of the flowchart of Fig. 5.

 The difference from the operation shown in Fig. 4 lies in that, in step S2605 and step 2606, the mobile node 10 does not
15 receive a notification of a change instruction of home agent from the home agent 11 but measures, when receiving a binding acknowledgement message 4050, a hop number and communication delay time thereby determining whether to change the home agent or not. Namely, the home agent selecting section 1104, when
20 receiving a binding acknowledgement message 4050 (step S2604), instructs the hop-number measuring section 1106 and communication delay time measuring section 1108 to make a measurement of both or any one.

 The hop-number measuring section 1106 measures a hop number
25 to the home agent 11 (step S2605) while the communication delay time measuring section 1108 measures a communication delay time

(step S2606). From a measured hop number and communication delay time, the home agent selecting section 1104 makes a comparison with a predetermined value (step S2607). Otherwise, the hop-number selecting section 1106 and communication delay time measuring section 1108 compare these with respective predetermined values, to output a result thereof to the home agent selecting section 1104. Incidentally, selecting a home agent using a hop number and communication delay time is possible by the following method.

10 Next, the home agent selecting section 1104 compares the predetermined value #3 as the hop-number and communication delay time which were measured like the home agent (S2607). The subsequent processing step S208 or subsequent step S2610 is the same as above-mentioned step S1506 or above-mentioned step S1508.

15 Fig. 6 is a configuration diagram of the mobile node 10 in this case. Meanwhile, Fig. 7 is a flowchart showing the operation of mobile node 10.

 In Fig. 6, a hop-number/communication-delay-time measuring section 2508 measures a hop number and communication delay time
20 (step S2705).

 The measurement results can be changed in their applications depending upon a communication content. For example, in case the communication content between the mobile node 10 and the correspondent node 17 has a real-time nature such as
25 voice communication, the home agent is changed by communication time measurement. If not so, home agent change can be by

hop-number measurement. Otherwise, by computing a value taking account of both of communication delay time and hop number, the home agent is changed depending upon a magnitude thereof. For example, used is a determination value A to be computed in Equation

5 (1).

$$A = \alpha \times (\text{communication delay time}) + \beta \times (\text{hop number}) \quad (1)$$

where α , β is a communication delay time and a weight for hop number. By adjusting these, it can be changed which one is to be emphasized of communication delay time and hop number.

10 Meanwhile, in the case there are a plurality of correspondent nodes, measuring a communication delay time may be only for the correspondent node in real-time communication with the mobile node 10, thereby changing the home agent. Otherwise, by comparing the sum of the values determined in the above Equation
15 (1) for each correspondent node, the home agent may be changed.

As described above, because the mobile node measures a hop number or communication delay time, there is no need to measure a hop number or communication delay time on every mobile node the home agent belongs. Consequently, the load on the home agent can
20 be relieved, enabling load distribution to the mobile nodes.

Incidentally, the mobile node 10 can use a dynamic DNS server (hereinafter referred to as "DNS") in communications with the correspondent node 17. In such a case, the home agent selecting section 1104 sends the changed-to home agent 14 a
25 binding update message 3950 and registers a new home address to the DNS. Thereafter, the correspondent node 17 can make an

inquiry to the DNS as in the usual and acquire a new home address of the mobile node 10, thereby enabling communications. Otherwise, the mobile node 10 can notify the correspondent node 17 of a change of its own home address.

5 Meanwhile, in the case that the mobile node 10 is in communication with the correspondent node 17 via the home agent, the mobile node 10 can measure a hop number to the correspondent node 17 thereby changing the home agent. In this case, the hop measuring section 1106 sends the correspondent node 17 an ICMP
10 echo request message and receives an ICMP echo reply message as a reply thereto. At this time, the received message is being tunneled by the home agent, wherein the hop number between the mobile node 10 and the correspondent node 17 can be determined by the below equation.

15

$$\begin{aligned} & \text{(the hop number between mobile node and correspondent node)} \\ &= \text{(hop number determined by outer header)} + \text{(hop number} \\ & \text{determined by outer header)} - 1 \end{aligned}$$

20

Meanwhile, in the case that the mobile node 10 is in communication with a plurality of correspondent nodes, realization is possible by measuring a hop number on a correspondent node in communications most frequently or a correspondent node in real-time communications.

25

Meanwhile, as for communication delay time measurement, besides that the mobile node 10 measures a communication delay

time each time the access router is changed, the following methods may be used:

1. measuring a communication delay time with a constant period,

5 2. measuring a communication delay time in the case the number of times of access router changes becomes an integer times a certain value,

10 3. measuring a communication delay time in the case the moving distance measured by the GPS becomes an integer times a predetermined value.

Incidentally, concerning the first item, the mobile node 10 can be set with an increased frequency of communication delay time measurement when the moving speed of the mobile node 10 is high, i.e. when the time interval of access router changes is short, 15 and a decreased frequency of communication delay time measurement can be set when the moving speed is low, i.e. when the time interval of access router changes is long.

Also, beside that a change of home agent is decided when communication delay time is equal to or greater than a threshold, 20 it is possible to store past communication delay time to make estimation by a transition thereof so that a home agent change is decided prior to reaching a threshold or greater.

As described above, for the mobile node 10, when the hop number or communication delay time is greater than a predetermined 25 value, switching over the home agent makes it possible to reduce the route of a control packet via the home agent. This can relieve

network load and reduce communication delay.

Fig. 8 is a diagram showing a configuration of the access router 15. A communicating section 1200 is for wireless connection with a mobile node 10. A data link interface 1201, 1208 is for packet exchange with the data link layer. An IP processing section 1202 is for IP process including mobile IP. A home agent information storing section 1203 is stored with the information of neighboring home agents. A home agent information notifying section 1204 is to notify a mobile node 10 of home agent information. A hop-number measuring section 1205 is to measure a hop number to a home agent. A home agent information acquiring section 1206 is to acquire home agent information. A communication delay time measuring section 1207 is to measure a communication delay time to a home agent. A network interface 1210 is for connection to an IP network.

The operation of the access router is explained.

The access router holds a home agent information management table 3510 in the home agent information storing section 1203. Fig. 9B shows the home agent information management table 3510. The home agent information management table 3510 includes at least one or more home agent address 3501. It may include a hop number 3505 or communication delay time 3507 at between the access router 15 and the home agent. The home agent address is acquired by manual setting or by DHCP.

Meanwhile, in the case that a hop number is included in the home agent information management table 3510, the access router

15 makes measurement in advance.

In the case that the access router 15, in advance, measures a hop number to the home agent, the hop-number measuring section 1205 sends the home agent an ICMP echo request message, to wait
5 for an ICMP echo reply message from the home agent. The hop-number measuring section 1205, after receiving an ICMP echo reply message, makes reference to the header in the message, and measures a hop number by using a similar method to that of the mobile node. The communication delay time is determined by
10 measuring a time of from sending an ICMP echo request message to receiving an ICMP echo reply message.

Next, explanation is made on the operation at a time that the access router 15 receives a home agent information request message 4550 from the mobile node 10 by using Fig. 1.

15 First, the home agent information notifying section 1204, after receiving a home agent information request message 4550 from the mobile node 10 (step S305), makes reference to the home agent information management table 3510 held by itself and generates a home agent information notifying message 4650, to send it to
20 the mobile node 10. The home agent information notifying message 4650, including at least one home agent address, may include a hop number of between the access router and the home agent.

Incidentally, as shown in this embodiment, the home agent
25 information option 4040 may be included in a router advertisement message notifying the prefix information about the access router,

or can configure a packet by itself.

Incidentally, in the notification method of home agent information, a home agent information notifying message 4650 may be notified as a reply to a home agent information request message 4550 from the mobile node 10 to the access router 15. Otherwise, the access router 15 may notify, by broadcast or multicast, a home agent information notifying message 4650 to which the access router 15 periodically notifies home agent information, to the mobile nodes 10 existing within the control range 16 of the access router 15.

Fig. 10 is a diagram showing a configuration of the home agent. A network interface 1300 is for connection to the IP network. A data link interface 1301 is to exchange packets with the data link layer. An IP processing section 1302 is to carry out an IP process including mobile IP. A home agent information storing section 1303 is stored with the information about neighboring home agents. A home agent information notifying section 1304 is to notify home agent information to the mobile node 10. A hop-number measuring section 1305 is to measure a hop number to a mobile node 10. A home agent information acquiring section 1306 is to get home agent information. A communication delay time measuring section 1307 is to measure a communication delay time to a mobile node 10.

Explanation is made on the home agent operation when a mobile node 10 requests a registration to the home agent, by using a flowchart of Fig. 1 and Fig. 11.

The network interface 1300, when receiving a binding update message 3950 from a mobile node 10 (step S1601), makes a notification to the hop-number measuring section 1305 and communication delay time measuring section 1307. Incidentally,

5 Step S1601 corresponds to Step S301 and S303 of Fig. 1.

Next, the hop-number measuring section 1305 measures a hop number of the received message (step S1602), while the communication delay time measuring section 1307 measure a communication delay time (step S1603).

10 The hop-number measuring section 1305 makes reference to a field (hop limit field 3901) representing a hop number in an IP header of the received binding update message 3950 and determines a difference from an initial value set in the mobile node 10, thereby determining a hop number. The initial value of
15 hop limit field 3901 is set to a value common among all the binding update messages 3950. Otherwise, an initial hop limit option 3930 representative of an initial value is added into the binding update message 3950 as showing in Fig. 25. The mobile node 10 sets the same value as the initial value set in the hop limit field
20 3901, and the hop-number measuring section 1305 makes reference to that field. Otherwise, measurement is possible by the use of a traceroute command.

The communication delay time measuring section 1307 sends an ICMP echo request message to the mobile node 10. The
25 communication delay time measuring section 1307, after receiving the ICMP echo request message from the mobile node 10, measures

a time of from transmitting the ICMP echo request message to receiving the ICMP echo reply message.

Then, the home agent information notifying section 1304 determines whether the hop number or communication delay time is greater than a threshold, or computes a determination value A according to Equation (1) on the basis of the value measured by the hop-number measuring section 1305 and communication delay time measuring section 1307 and compares it with a predetermined threshold (step S1604).

10 In the case that the result of comparison is equal to or greater than the predetermined threshold, the home agent information notifying section 1304 sets the home agent change instruction flag (C) 4032 in the binding acknowledgement message 4050 shown in Fig. 26 and sends the binding acknowledgement message 4050 thereof to the mobile node 10 (step S1605).
15 Incidentally, Step S1605 corresponds to Step S302 and S304 of Fig. 1.

On the other hand, in the case that the result of comparison is smaller than the threshold, the home agent information notifying section 1304 approves a registration of the mobile node 10 and processes to home-register the care-of address thereof (step S1605). Then, the home agent information notifying section 1304, after completing that process, sends the mobile node 10 a binding acknowledgement message 4050 set with a value
20 representative of successful registration to the status field (step S1606). Incidentally, Step S1606 corresponds to Step S302

and S304 of Fig. 1.

The threshold differs in its set value depending upon a network scale or configuration. For example, for a certain great scale of network, the hop number is preferably set at
5 approximately 10 - 15 hops.

Now, using Fig. 2, explanation is made on the home agent operation in the case the home agent is changed by the mobile node 10.

In Fig. 2, after the changed-to home agent 14 has received
10 a ICMP mobile prefix solicitation message from the mobile node 10 (step S902), the home agent information notifying section 1304 sends the mobile node 10 a ICMP mobile prefix advertisement message containing a home prefix information option (step S903). This ICMP mobile prefix solicitation message and the ICMP mobile
15 prefix advertisement message are specified on the draft "Mobility Support in IPv6" of IETF Mobile IP Working Group. Also, the home agent information notifying section 1304 generates or updates an entry in which the home address of mobile node 10 is associated with the current care-of address.

20 On the other hand, the former home agent 11 erases the entry corresponding to the home address of the binding-cache mobile node 10 by the fact that the home agent information acquiring section 1306 has received from the mobile node 10 a binding update message 3950 with the lifetime field 3922 set at 0 (step S901).

25 As described above, the home agent makes registration and erasure of a belonging mobile node 10 in accordance with a request

from the mobile node 10. This eliminates the necessity of communication of a control packet to and from a mobile node 10 having moved far in distance, making it possible to relieve the load on the network and reduce the communication delay to the
5 mobile node 10.

Incidentally, in this embodiment, the mobile node 10 sends home agent information request message 4550 to the access router 15 at a time that a home agent information becomes necessary. However, it is possible for the access router 15 to periodically
10 send home agent information notifying message 4650 306 to the mobile node 10, so that the mobile node 10 can store the information thereof in the home agent information storing section 1105.

Also, in the present invention, the changed-to home agent 14 generated or updated an entry in which the home address is
15 associated with the current care-of address, by obtaining information from the mobile node 10. However, it is possible for the former home agent 11 to send the changed-to home agent 14 a binding cache information notifying message containing a binding cache entry to mobile node 10 (step S1002).

20 The concrete example thereof is explained in the below.

First, the mobile node 10 sends the home agent 11 a binding update message 3950 set with a binding cache transfer flag (B) 3923 instructing to transfer a binding cache entry and having a lifetime field 3922 set at zero shown in Fig. 25 (step S1001).

25 Next, the home agent information acquiring section 1306 of the home agent 11, when receiving it (step S1001), erases the entry

in the binding cache corresponding to a home address of mobile node 10. Simultaneously, a binding cache notifying message 1002, containing a binding cache entry corresponding to the mobile node 10, is sent to the changed-to home agent 14 (step S1002).

5 Fig. 28 shows a format of binding cache notifying message 4200. In Fig. 28, the binding cache notifying message 4200 includes a binding cache information option 4270. The binding cache information option 4270 includes the information about mobile node 10 home address, care-of address, lifetime and so on.

10 The changed-to home agent 14, after receiving the binding cache notifying message 4200 (step S1002), generates an entry that the home address of mobile node 10 and the current care-of address are associated by the home agent information acquiring section 1306. The changed-to home agent 14 sends the mobile node 10 a

15 binding acknowledgement message 4050 set with a binding cache transfer end flag (B) 4033 shown in Fig. 26 (step S1003).

Besides, it is possible, as another method, for the changed-to home agent 14 to request the former home agent 11 for a binding cache entry. Namely, the changed-to home agent 14, when

20 receiving a binding update message 3950 set with a binding cache transfer flag (B) 3923 from the mobile node 10, sends a binding cache information request message 4100 to an address of the former home agent 11 shown in the binding information option 3940. Fig. 27 shows a format of binding cache information request message

25 4100. As shown in Fig. 27, the binding cache information request message 4100 contains a home address option 416. Requested is

the entry to the home address set in the home address option 4160. At this time, the old home address is inserted to the home address option 4160 in the message. The changed home agent 11, after receiving the binding cache information request message 4100, sends the changed-to home agent 14 a binding cache notifying message 4200 containing an entry corresponding to the old home address shown in the home address option 4160 of the message. Fig. 28 shows a format of binding cache notifying message 4200. As shown in Fig. 28, the binding cache notifying message 4200 contains a binding cache information option 4270. The binding cache information option 4270 includes the information about a mobile node 10 home address, care-of address, lifetime and so on. The changed-to home agent 14, after receiving the binding cache notifying message 4200, generates an entry in which the home address of mobile node 10 and the current care-of address are associated. The changed-to home agent 14 sends the mobile node 10 a binding acknowledgement message 4050 set with a binding cache transfer end flag 4033.

As described above, because the information about mobile node 10 is transferred from the former home agent to the changed-to home agent, the changed-to home agent is allowed to take over a variety of pieces of information, e.g. the latest use information of a binding cash entry concerning the mobile node 10. This provides the great merit for the mobile-node user.

Meanwhile, although in this embodiment the mobile node 10, the access router 15 and the home agent measure a hop number and

communication delay time, this is not limitative, i.e. it is possible to provide a structure having at least one thereof. In such a case, there is no need of switching between the measured objects depending on a communication content or computing a determination value as in Equation (1).

(Embodiment 2)

Fig. 13 is a configuration diagram of a mobile communication system in a second embodiment of the invention.

10 This is different from the mobile communication system of the first embodiment, in that a home agent information storing server 19 is provided to manage home agents.

The home agent information storing server 19 is stored with the addresses, managing prefixes, managing access routers 15, unoccupied resources and load of the home agents existing on the network, in a home agent information management table 3500 shown in Fig. 9A. In the case of requested from a home agent, access router 15 or mobile node 10, a suitable home agent is selected and notified from the home agent information management table 20 3500.

For example, as shown in Fig. 13, the access router 15 sends a home agent information request message 4550 to the home agent information storing server 19 in order to get the information about a home agent possessing the same in its control range (step 25 S701).

Then, the home agent information storing server 19 selects

a home agent having the access router 15 in its control range from the home agent information management table 3500, and sends the access router 15 a home agent information notifying message 4650 containing the information of that home agent (step S702).

5 Otherwise, as shown in Fig. 14, the mobile node 10 sends a home agent information request message to the home agent information storing server 19 in order to get the information of a home agent having a prefix thereof in its control range (step S801).

10 Next, the home agent information storing server 19 selects a home agent having a prefix of mobile node 10 in the control range from the home agent information management table 3500, and sends the mobile node 10 a home agent information notifying message containing the information of that home agent (step S802).

15 The operation in the present embodiment configuration is explained by using Fig. 14.

 The mobile node 10 moves to have an access to a different access router 12, 15, wherein the process up to deciding a change of home agent (step S301 to S304) is similar to that of embodiment
20 1.

 Then, the mobile node 10, when decided a change of home agent, sends a home agent information request message to the home agent information storing server 19 (step S801).

 When receiving the home agent request message (step S801),
25 the home agent information storing server 19 selects a suitable home agent from the home agent information management table 3500

and sends the mobile node 10 a home agent information notifying message describing the selected home agent (step S802).

The subsequent process is similar to that of the first embodiment.

5 Incidentally, when the mobile node 10 decides a change of home agent, home agent information can be requested to the access router 15. In this case, realization is possible by that the access router 15 sends the home agent information storing server 19 a home agent request message and the home agent information
10 obtained from the home agent information storing server 19 is notified to the mobile node 10.

Now, explanation is made on the operation of each apparatus.

The configuration of the mobile node 10 is similar to that of the first embodiment.

15 Meanwhile, the operation of the mobile node 10 is different from that of the first embodiment in that home agent information is acquired from a home agent information storing server 19. This is explained by using a flowchart of Fig. 15B.

First, the home agent information acquiring section 1107
20 generates a home agent information request message and sends it to the home agent information storing server 19 (step S3404). Fig. 29 shows a format of home agent information request message 4300. Incidentally, step S3404 corresponds to Step S801 of Fig. 14.

Then, the home agent information acquiring section 1107
25 receives the home agent information notifying message from the home agent information storing server 19 (step S3405) and stores

an address of home agent to the home agent information storing section 1105. Fig. 30 shows a format of home agent information notifying message 4450. The home agent information notifying message 4450 is added of a home agent information option 4040 as shown in Fig. 30. The home agent information option 4040 includes IP address, resource information, and load information and so on of the home agent. Incidentally, step S3405 corresponds to Step S802 of Fig. 14.

Next, the home agent selecting section 1104 selects a home agent (step S3406). This process, however, is similar to that of the first embodiment.

Now, the operation of the access router 15 is explained. Incidentally, the configuration of the access router 15 is similar to that of the first embodiment.

The operation of the access router 15 is different from that of the first embodiment in that home agent information is acquired from the home agent information storing server 19.

Fig. 15B is a flowchart which shows operation of an access router.

First, the home agent information acquiring section 1206 generates a home agent information request message 4300 and sends it to the home agent information storing server 19 (step S3404). Incidentally, step S3404 corresponds to Step S701 of Fig. 13.

Then, the home agent information acquiring section 1206 receives the home agent information notifying message 4450 from the home agent information storing server 19 (step S3405), and

stores an address of home agent to the home agent information storing section 1203. Incidentally, step S3405 corresponds to Step S702 of Fig. 13.

The subsequent processes are similar to those of the first
5 embodiment.

Now, the operation of the home agent is explained. Incidentally, the configuration of the same is similar to that of the first embodiment.

The operation of the home agent is different from that of
10 the first embodiment in that home agent information is acquired from the home agent information storing server 19.

Similarly to the foregoing mobile node and access router , the home agent receives a home agent information notifying message 4450 from the home agent information storing server 19 by the
15 process shown in the flowchart of Fig. 15B, and selects a suitable home agent (step S3404 to step S3406). Besides, the home agent information notifying section 1304 of the home agent generates a home agent information notifying message 4450 containing the information of its own address and resource and periodically sends
20 it to the home agent information storing server 19.

Also, when the home agent information acquiring section 1306 receives a home agent information request message 4300 from the home agent information storing server 19, the home agent information notifying section 1304 sends, as a reply, a home agent
25 information notifying message 4450 containing the information of its own resource information to the home agent information storing

server 19.

Due to this, the home agent information storing server 19 is always notified of the most recent piece of information about the home agent.

5 Now, the home agent information storing server 19 is explained in the below.

Fig. 16 is a figure showing a configuration of the home agent information storing server 19. A network interface 1400 is for connection to the IP network. A data link interface 1401 is to
10 exchange packets with a data link layer. An IP processing section 1402 is to carry out IP processes including mobile IP. A higher layer interface 1403 is to exchange packets with a higher layer. A home agent information storing section 1404 is stored with the information of neighboring home agents. A home agent information
15 notifying section 1405 is to notify the mobile node 10 of home agent information. A home agent information acquiring section 1406 is to acquire home agent information. An application part 1407 is to offer the service which the home agent information storing server 19 has.

20 Now, the operation of the home agent information storing server 19 is explained by using the flowchart shown in Fig. 15A.

When the network interface 1400 receives a home agent information request message 4300 (step S3401), the home agent information notifying section 1405 selects a suitable home agent
25 from the home agent information management table 3500 in the home agent information storing section 1404 (step S3402).

Then, the home agent information notifying section 1405 generates a home agent information notifying message 4450 and sends it to a source of sending the home agent information request message 4300 (step S3403).

5 Now, described is a method for acquiring home agent information in the home agent information storing server 19. The home agent information storing section 1404 holds a home agent information management table 3500 shown in Fig. 9A. In the home agent information management table 3500, there are stored home
10 agent addresses (3501), prefixes under management (3502), access routers (3503), and information of loads, resources and the like (3504). The home agent information management table 3500 is updated by receiving a home agent information notifying message 4450 containing the information of its own address, resource and
15 the like manually set or sent at a regular interval from each home agent. Meanwhile, the information of each home agent in the home agent information management table 3500 can be updated by the following, i.e. the home agent information acquiring section 1406 sends a home agent information request message 4300 to a
20 registered home agent and receives a home agent information notifying message 4450 containing own resource information and the like from the home agent. The format of home agent information request message 4300 and home agent information notifying message 4450 is similar to that of Figs. 29 and 30. In the case there
25 is no answer in a predetermined time from a home agent, the relevant home agent can be determined not usable.

As described above, because the home agent information storing server centrally manages the information of the home agents under management over the network, it is easy for the mobile node or access router to get home agent information.

5

(Embodiment 3)

Embodiment 3 of the invention is different from embodiment 1 in that a home agent decides a change of the home agent depending upon a status of its own unoccupied resource.

10 Embodiment 3 of the invention is explained by using Fig. 17. Fig. 17 is a network configuration diagram, which is different from embodiment 1 in that a home agent 20 is newly added.

 In a configuration like Fig. 17, the operation is explained in the below. The mobile node 10 moves to have an access to a
15 different access router 15 and gets a new care-of address, thereafter sending a home agent 14 a binding update message for registration (step S3201). The process up to this is similar to that of embodiment 1.

 Next, the home agent 14, after receiving the binding update
20 message 3950 (step S3201), makes sure of whether there is, in the binding cache, sufficient resource for generating a new entry to mobile node 10. In the case of resource deficiency, the home agent 14 sets a number representative of resource deficiency in the status field 4031 and sends a binding acknowledgement message 4050
25 describing the information of a changed-to home agent (step S3202) thereby refusing a registration of a primary care-of address. The

mobile node 10, after receiving the binding acknowledgement message 4050 from the home agent (step S3202), decides one home agent as changed-to agent out of the home agents described in the message. Herein, explanation is on a case of a change from home agent 11 to home agent 20.

The mobile node 10 sends the former home agent 11 a binding update message 3950 in which the lifetime field 3922 is set at 0 (step S3203), and sends the changed-to home agent 20 a binding update message 4050 (step S3204). The former home agent 11, after receiving the binding update message 3950 (step S3204), erases the entry related to the old home address of mobile node 10.

Then, the changed-to home agent 20, after receiving the binding update message 3950 (step S3204), generates or updates an entry to mobile node 10.

Now, the detailed operation of each apparatus is explained.

The configuration of mobile node 10 is similar to that of embodiment 1.

The operation of mobile node 10 is explained in the below, by using Figs. 17 and 18. Fig. 18 is a flowchart showing the operation of mobile node 10 in this embodiment.

The process of steps S2901 to S2904 is similar to that of steps S1501 to S1504 in the first embodiment.

Then, the home agent selecting section 1104 makes reference to a status field 4031 of a received binding acknowledgement message 4050 (step S2905). In the case that the value in the status field 4031 is set to a number showing a resource deficiency

of home agent and the registration is refused, the home agent selecting section 1104 makes sure of whether there is added a home agent information option 4040 (step S2906).

Next, in the case that the status field 4031 is not a resource
5 deficiency but is set to a value representative of a registration success, carried out is a binding acknowledgement process such as update of a binding update list (step S2907). Then, the process returns to the step S2901.

Then, the home agent selecting section 1104 checks whether
10 or not the binding acknowledgement message 3950 is added with a home agent information option 4040. In the case of being added, selected is an address of one home agent from those (step S2908). The address selection by the home agent selecting section 1104 may be to randomly select one from one or more home agent addresses,
15 or may be performed according to a priority determined taking into consideration unoccupied resources or the like of home agent. Incidentally, the priority may be represented according to a home agent address order in the home agent information option 4044 or represented according to a magnitude of values in the field added
20 to show a priority.

The mobile node 10, after selecting a changed-to home agent, carries out a change process of home agent (step S2909). The process content is similar to that of embodiment 1.

On the other hand, in the case that there is no addition
25 of home agent information option 4040 in step S2906, a home agent information request message 4550 is sent to the access router 15.

After the home agent information acquiring section 1107 receives a home agent information notifying message 4650 from the access router 15 (step S2910), the process moves to step S2908.

Meanwhile, a change of home agent is similarly possible on the case the mobile node 10 moves out of home agent control. Fig. 19 is a flowchart showing the operation in that case.

The steps S2901 to S2904 are similar to those of the Fig. 18 case using a determination criterion of resource deficiency. The home agent selecting section 1104, when receiving a binding acknowledgement message 4050 (step S2904), makes reference to a status code and makes sure of whether the status code shows out-of-range (step S3105). In the case of within the control range, a binding acknowledgement process is carried out. In the case of out of the control range, it is confirmed whether there is added a home agent information option 4040. From then on, operation is similar to that of the resource deficient case.

Incidentally, the mobile node 10, after receiving a candidate home agent from the home agent 14, can make a selection including the measurement result of hop number or communication delay time as shown in embodiment 1, in determining a changed-to home agent.

The access router 15 is similar to that of embodiment 1.

Fig. 20 is a diagram showing a configuration of home agent. This is different from that of embodiment 1 in that there is no provision of a hop-number measuring section 1305 and communication delay measuring section 1307 and in that the home

agent information notifying section 1304 has a function to make sure of an unoccupied resource of binding cache.

Now, the home agent operation is explained by using a flowchart shown in Fig. 21.

5 The communicating section 1300, when receiving a binding update message 3950 from the mobile node 10 (step S2801), makes sure of whether there are sufficient resources for the home agent information notifying section 1304 to generate a new entry to mobile node 10 in the binding cache (step S2802). Herein,
10 resource refers to CPU load, memory remaining capacity, hard disk remaining capacity, connection network load, the number of mobile nodes accommodated on a program. Incidentally, step S2801 corresponds to Step S3201 of Fig. 17.

Next, in the case of sufficient resources, the home agent
15 information notifying section 1304 registers the care-of address of mobile node 10 to the binding cache (step S2805).

Then, the home agent information notifying section 1304 generates a binding acknowledgement message 4050 set with a value showing a registration success in the status field 4031 (step
20 S2806) and sends it to the mobile node 10 (step S2807). Incidentally, step S2807 corresponds to Step S3202 of Fig. 17.

On the other hand, in the case of resource deficiency, the home agent information notifying section 1034 generates a binding acknowledgement message 4050 set with a number representative of
25 deficient resources in the status field 4031 (step S2803).

Next, the home agent information storing section 1303 holds

a home agent information management table 3500 describing at least an address of another home agent and current resource information. The home agent information notifying section 1304, of the home agent 11 refusing registration, selects one or more home agents
5 having a greater unoccupied resource than a predetermined value from the held home agent information management table 3500. The home agent information notifying section 1304 adds a home agent information option 4040 to the binding acknowledgement message 4050, and sets the selected one or more pieces of home agent
10 information to that option (step S2804).

Incidentally, the home agent may include resource information in the router advertisement message when architecting a home agent list. Also, the home-agent list may be used as a home agent information management table 3510.

15 Then, the process moves to step S2807.

Meanwhile, although the operation concerning a change of home agent is similar to that of embodiment 1, the following method is applicable.

The home agent information notifying section 1304, after
20 deciding a changed-to home agent, transfers to the changed-to home agent 14 a binding cache notifying message 4200 including an entry to mobile node 10 in the binding cache. The changed-to home agent 14 generates a new home address of mobile node 10 and sends the mobile node 10 a binding acknowledgement message 4050 containing
25 the new address.

The above explained a change of home agent because of

resource deficiency in the home agent. However, the home agent can similarly decide a change of home agent in the case that the care-of address shown in the binding update message 3950 received from the mobile node 10 is out of the control range. The operation in that case is explained by using a flowchart of Fig. 22. The home agent, when receiving a binding update message 3950 from the mobile node 10 (step S2801), confirms whether the care-of address matches with the prefix (3301) included in the address table shown in Fig. 23 under management of the home agent (step S3002). Incidentally, step S2801 corresponds to Step S3201 of Fig. 17.

In the case that the care-of address of mobile node 10 is out of the control range, generated is a binding acknowledgement message 4050 describing a status code representative of movement to out-of-control (step S3003).

The other operation is similar to that in the deficient resource case shown in Fig. 21.

Furthermore, registration refusal is possible depending upon a current load status of home agent in place of unoccupied resources.

Also, in the case of changing to another home agent when the home agent 11 refuses a registration because the mobile node 10 goes out of its own control range, a similar method can be used.

Incidentally, the home agent can be changed also by the method shown in Fig. 10 of embodiment 1.

As described above, when the resource is deficient or load is heavy, the home agent refuses a registration requested by a

new mobile node 10. This can prevent the communication trouble due to resource deficiency or the like.

Also, because the mobile node 10 is notified of a suited home agent from the home agent, it can find an alternative home agent in a brief time.

(Embodiment 4)

Fig. 24 is a configuration diagram of a mobile communication system in a fourth embodiment of the invention.

10 This is different from the mobile communication system of the third embodiment shown in Fig. 17 in that there is added a home agent information storing server 19.

The home agent information storing server 19 is stored with the information of addresses, managing prefixes, managing access routers, unoccupied resources, loads and the like of the home agents existing on a network, in a home agent information management table 3500. In the case of requested from a home agent, access router or mobile node, a suitable home agent is selected, for notification, from the home agent information management table 3500. For example, in the case that the home agent 14 is deficient in resource as shown in Fig. 24, it sends a home agent information request message 4300 3203 to the home agent information storing server 19 in order to acquire the information about another home agent having sufficient resource (step S3211).

25 Receiving the request, the home agent information storing server 19 selects a home agent having an unoccupied resource from

the home agent information management table 3500 and sends the home agent 14 a home agent information notifying message 4450 containing the information about that home agent (step S3212). The notified home agent 14, when answering to the mobile node 10 registration-requesting for a registration-refused binding acknowledgement message 4050, sends the information of an alternative home agent added to the home agent information option 4040 (step S3213).

Next, concerning the operation of each apparatus, the mobile nodes 10 and the access routers 15 are similar to those of embodiment 3. The home agent storing server 19 is similar to that of embodiment 2.

Although the configuration of home agent is similar to that of embodiment 3, there is difference from embodiment 3 in that, in the case that unoccupied resource is deficient when receiving a registration request from the mobile node 10 (step S3201), the home agent information acquiring section 1306 goes, for inquiry, to the home agent information storing server 19.

The operation in this case is explained by using a flowchart of Figs. 24 and 15B.

First, the home agent information acquiring section 1306 generates a home agent information request message 4300 and sends it to the home agent information storing server 19 (step S3404). Incidentally, step S3404 corresponds to Step S3211 of Fig. 24.

Then, the home agent information acquiring section 1306 receives a home agent information notifying message 4450 from the

home agent information storing server 19 (step S3405) thereby acquiring the information about home agent. Incidentally, step S3405 corresponds to Step S3212 of Fig. 24.

5 This allows for the home agent to readily know an alternative home agent, enabling the mobile node 10 to find an alternative home agent in a brief time.

Incidentally, in the present embodiment, although the home agent made an inquiry to the home agent information storing server 19, the invention is not limited to this. The mobile node 10 10 itself may send a home agent information request message 4300 to the home agent information storing server 19 so that it can similarly receive a home agent information notifying message 4450 and select one home agent address therefrom.

15 INDUSTRIAL APPLICABILITY

As described above, the present invention is useful for the mobile communications supported with IP version 6, and suited for communications with another communication node when the mobile node is connected with ones other than the home link.

CLAIMS

1. A mobile node comprising:

a measuring section for measuring at least one of a hop number and communication delay time to a home agent;

5 a home agent information acquiring section for acquiring information about a home agent as a subject of measurement of the measuring section; and

a home agent selecting section for changing, when a measurement value to the home agent to which the mobile node
10 belongs becomes equal to or greater than a first predetermined value, the belonging home agent into the new home agent, by using the information which acquired in the acquiring section, having a measurement value equal to or less than a second predetermined value.

15 2. A mobile node according to claim 1, wherein, in a case that the mobile node is in real-time communication with another node, the measuring section measures a communication delay time to the home agent to change, when a communication delay to the belonging home agent becomes equal to or greater than a third
20 predetermined value, the belonging home agent by one having a communication delay equal to or smaller than a fourth predetermined value;

and in the case of not so, the measuring section measures a hop number to the home agent to change, when a hop number to the
25 belonging home agent becomes equal to or greater than a first predetermined value, the belonging home agent by one having a hop

number equal to or smaller than a second predetermined value.

3. A mobile node according to claims 1, wherein the measuring section determines the hop number by computing a difference between an initial value of a hop limit field in a header of a packet of IP version 6 sent from the home agent and a value of the hop limit field received.

4. A mobile node according to claims 2, wherein the measuring section determines the hop number by computing a difference between an initial value of a hop limit field in a header of a packet of IP version 6 sent from the home agent and a value of the hop limit field received.

5. A mobile node according to claims 1, wherein the measuring section determines the communication delay time by measuring a time of from sending the home agent an ICMP echo request packet to receiving an ICMP echo reply packet from the home agent.

6. A mobile node according to claims 2, wherein the measuring section determines the communication delay time by measuring a time of from sending the home agent an ICMP echo request packet to receiving an ICMP echo reply packet from the home agent.

7. A mobile node according to claim 1, wherein the measuring section increases a measuring frequency of communication delay time when the moving speed of the mobile node is high, and decreases the measuring frequency when the moving speed is low.

8. A mobile node according to claim 3, wherein the measuring section sends an ICMP echo request packet when the number of times of connection changes to the access router becomes an integer

times a fifth predetermined value.

9. A home agent comprising: a home agent information notifying section for answering a registration refusal in a case that, when receiving a registration request from a mobile node,
5 the home agent is deficient in unoccupied resource.

10. A home agent according to claim 9, further comprising a home agent information storing section for storing home agent information including an address and current resource information of another home agent, wherein the home agent information
10 notifying section answers the registration refusal and selects a home agent suited for a predetermined condition from the home agent information storing section to thereby answer home agent information of the selected home agent.

11. A home agent according to claim 10, wherein the
15 predetermined condition is at least any of a maximum in unoccupied resource and a minimum in load.

12. A home agent comprising: a home agent information notifying section for answering a registration refusal in a case that, when received a registration request from a mobile node,
20 the mobile node entered a predetermined sub-network.

13. A home agent according to claim 12, further comprising a home agent information storing section for storing home agent information including an address of another home agent, wherein the home agent information notifying section answers the
25 registration refusal and selects a home agent having as a control range the sub-network to thereby answer home agent information

of the selected home agent.

14. A home agent according to claims 11, wherein the registration refusal and the home agent information are an addition of a home agent information option to a binding
5 acknowledgement message.

15. A home agent comprising: a home agent information notifying section for notifying, when receiving a notification for changing a home agent and an address of a changed-to home agent from a belonging mobile node, the changed-to home agent of an entry
10 content concerning the mobile node of a binding cache.

16. An access router comprising:

a home agent information storing section for storing home agent information including an address of a home agent; and

a home agent information notifying section for notifying
15 a mobile node, as a slave, of home agent information about a neighboring home agent stored in the home agent information storing section.

17. An access router according to claim 16, wherein the home agent information notifying section notifies the mobile node of
20 home agent information when requested from the mobile node.

18. An access router according to claim 16, wherein the home agent information notifying section periodically notifies the mobile node of home agent information.

19. A home agent information storing server comprising:

25 a home agent information storing section for holding home agent information including an address of a managing home agent;

a home agent information notifying section for notifying any one of a mobile node, access router and home agent in connection to a network of the home agent information selected from the home agent information storing section.

5 20. A home agent information storing server according to claim 19, wherein the home agent information storing section further holds any one piece of information of current unoccupied resource and load of the managing home agent.

10 21. A home agent information storing server according to claim 20, further comprising a home agent information acquiring section for receiving the information from the managing home agent and updating the home agent information storing section.

15 22. A home agent according to claims 10, further comprising a home agent information acquiring section for acquiring the home agent information from the home agent information storing server comprising:

a home agent information storing section for holding home agent information including an address of a managing home agent; and

20 a home agent information notifying section for notifying any one of a mobile node, access router and home agent in connection to a network of the home agent information selected from the home agent information storing section;

25 wherein the home agent information storing section further holds any one piece of information of current unoccupied resource and load of the managing home agent.

23. A home agent according to claim 22, characterized to send information of own load and unoccupied resource to the home agent information storing server:

5 a home agent information storing section for holding home agent information including an address of a managing home agent; and

10 a home agent information notifying section for notifying any one of a mobile node, access router and home agent in connection to a network of the home agent information selected from the home agent information storing section;

wherein the home agent information storing section further holds any one piece of information of current unoccupied resource and load of the managing home agent.

24. An access router according to claim 16, further comprising a home agent information acquiring section for getting the home agent information from the home agent information storing server:

20 a home agent information storing section for holding home agent information including an address of a managing home agent; and

a home agent information notifying section for notifying any one of a mobile node, access router and home agent in connection to a network of the home agent information selected from the home agent information storing section;

25 wherein the home agent information storing section further holds any one piece of information of current unoccupied resource

and load of the managing home agent.

25. A mobile node according to claim 1, wherein the home agent information acquiring section gets the home agent information from the home agent information storing server:

5 a home agent information storing section for holding home agent information including an address of a managing home agent; and

10 a home agent information notifying section for notifying any one of a mobile node, access router and home agent in connection to a network of the home agent information selected from the home agent information storing section;

wherein the home agent information storing section further holds any one piece of information of current unoccupied resource and load of the managing home agent.

15 26. A mobile node according to claim 1, wherein the home agent information acquiring section gets information about a home agent notified from the home agent comprising:

20 a home agent information notifying section for answering a registration refusal in a case that, when receiving a registration request from a mobile node, the home agent is deficient in unoccupied resource; and

 a home agent information storing section for storing home agent information including an address and current resource information of another home agent;

25 wherein the home agent information notifying section answers the registration refusal and selects a home agent suited

for a predetermined condition from the home agent information storing section to thereby answer home agent information of the selected home agent.

27. A mobile node according to claim 26, wherein the home agent selecting section selects, preferentially, a home agent satisfying at least any of conditions of greatest unoccupied resource, minimum load, least hop number and shortest communication delay time.

28. A method for mobile communications comprising:

10 a step of measuring at least any one of a hop number and communication delay time to a belonging home agent by a mobile node;

a step of requesting a belonging home agent to delete registration and a new home agent to make registration, when a
15 result of measurement becomes equal to or greater than a predetermined value;

a step of deleting a registration of the mobile node by the belonging home agent; and

a step of registering the mobile node by the new home agent.

20 29. A method for mobile communications according to claim 28, wherein as the new home agent is selected preferentially a home agent satisfying at least any of conditions of greatest unoccupied resource, minimum load, least hop number and shortest communication delay time.

25 30. A method for mobile communications according to claim 29, wherein the new home agent is notified from a home agent

information managing server for managing information about home agents to the mobile node.

FIG. 1

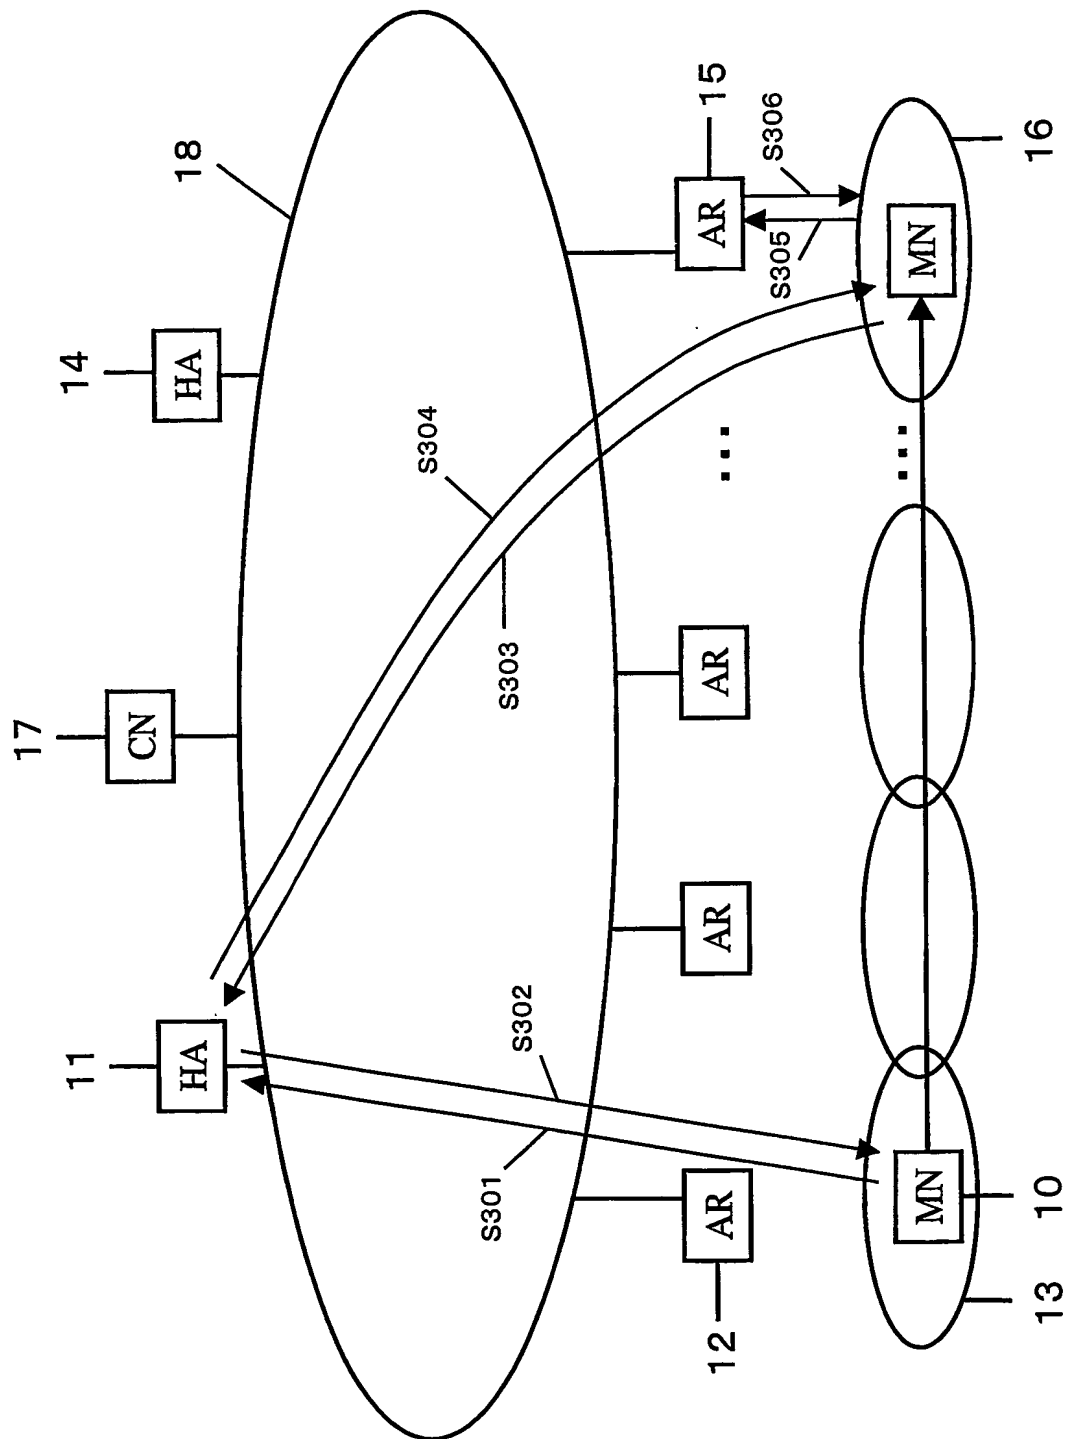


FIG. 2

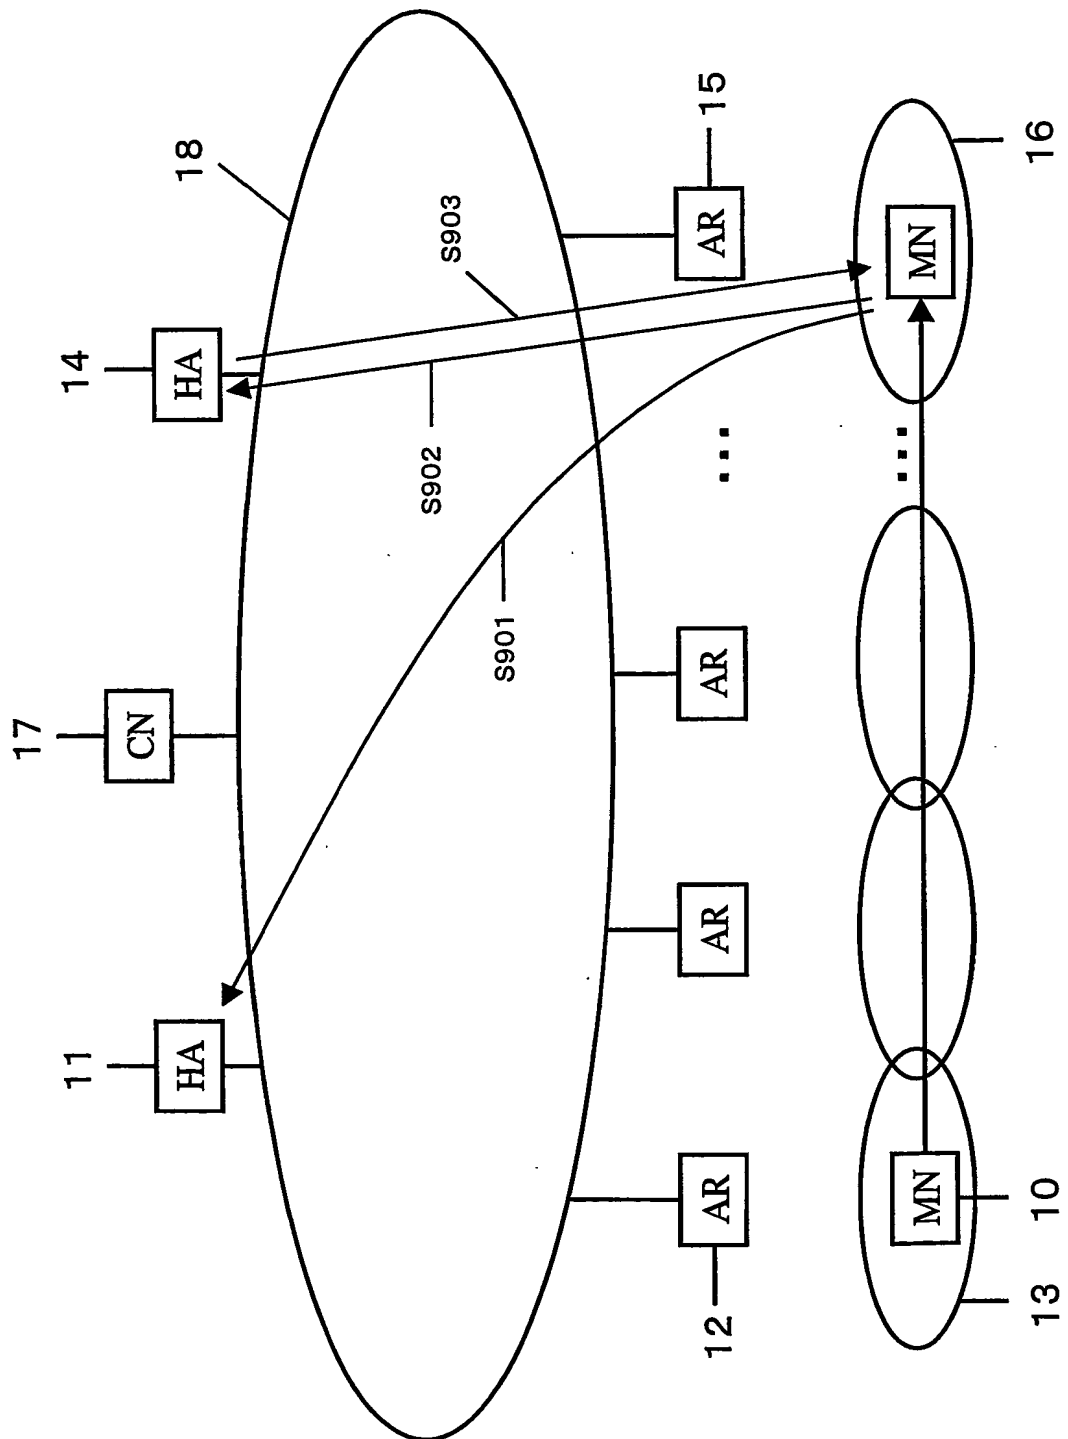


FIG. 3


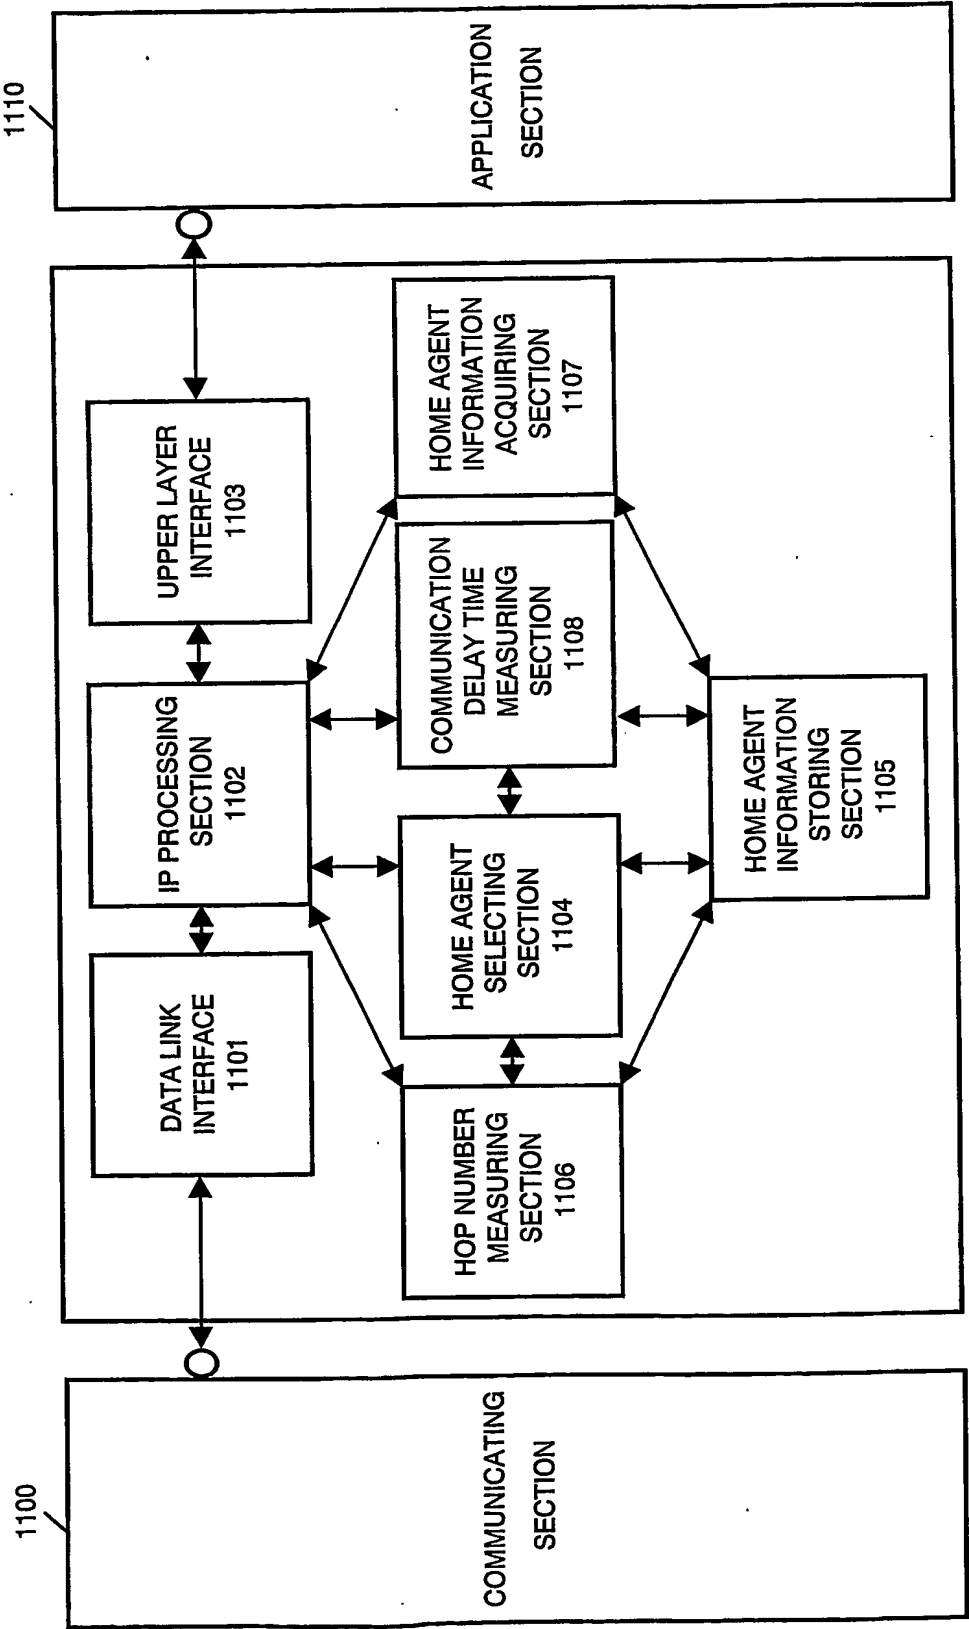


FIG. 4

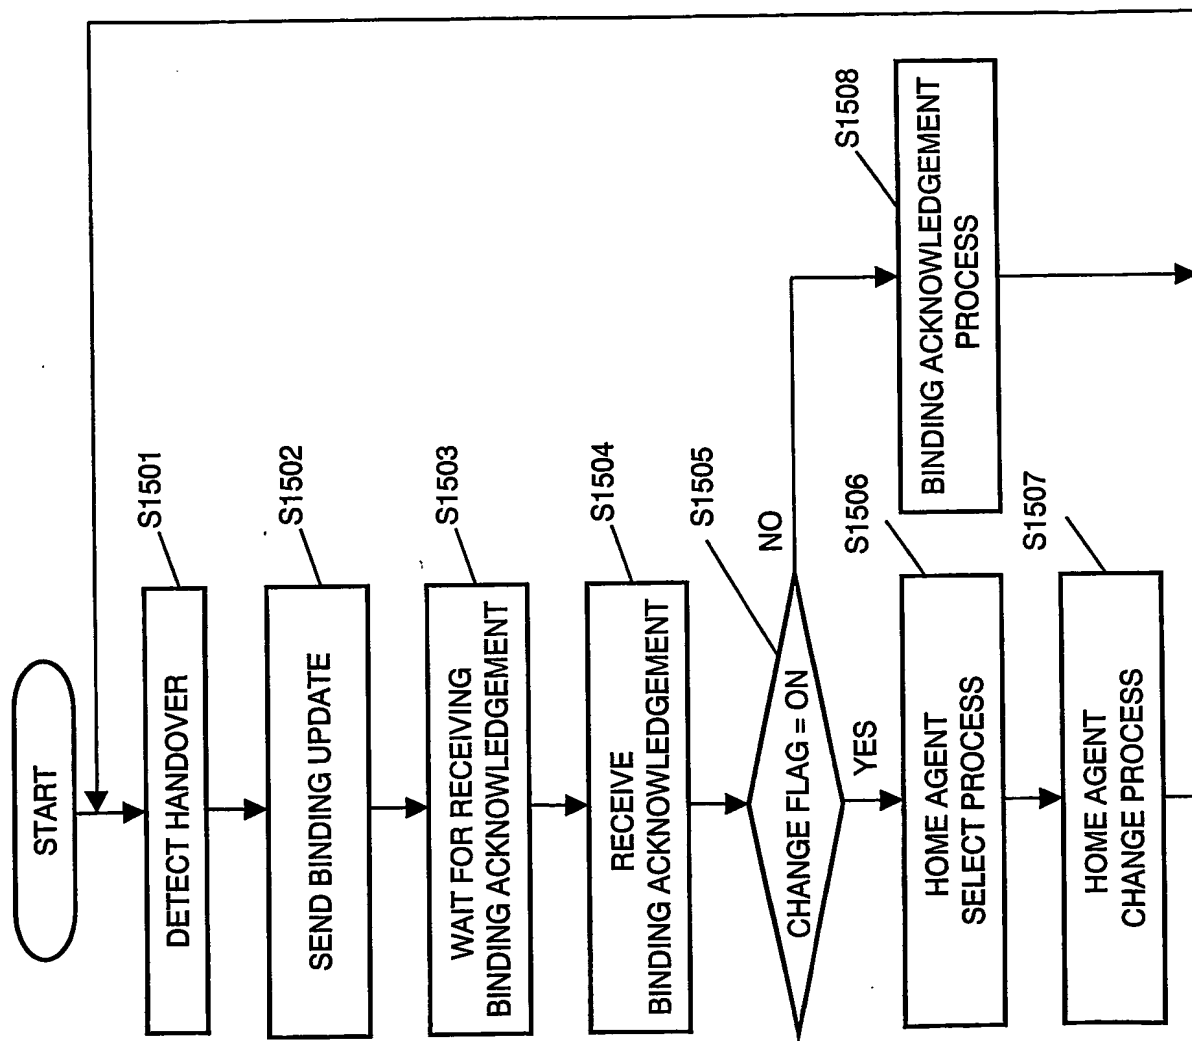

5/35

FIG. 5


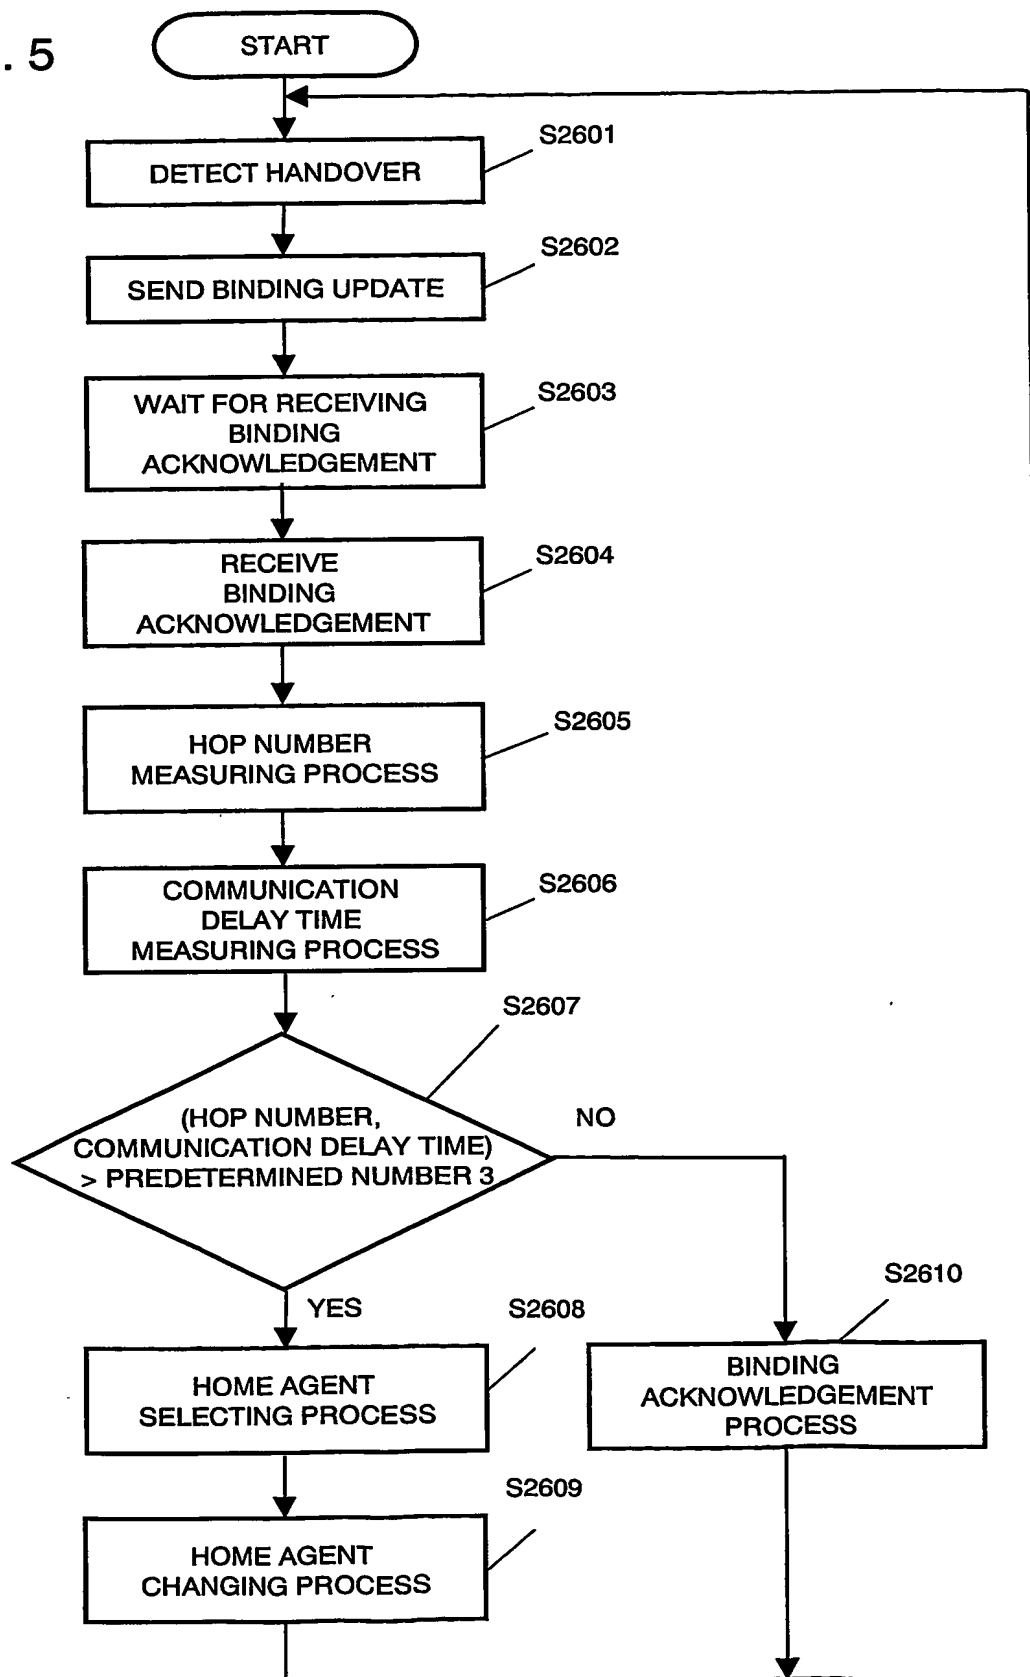


FIG. 6

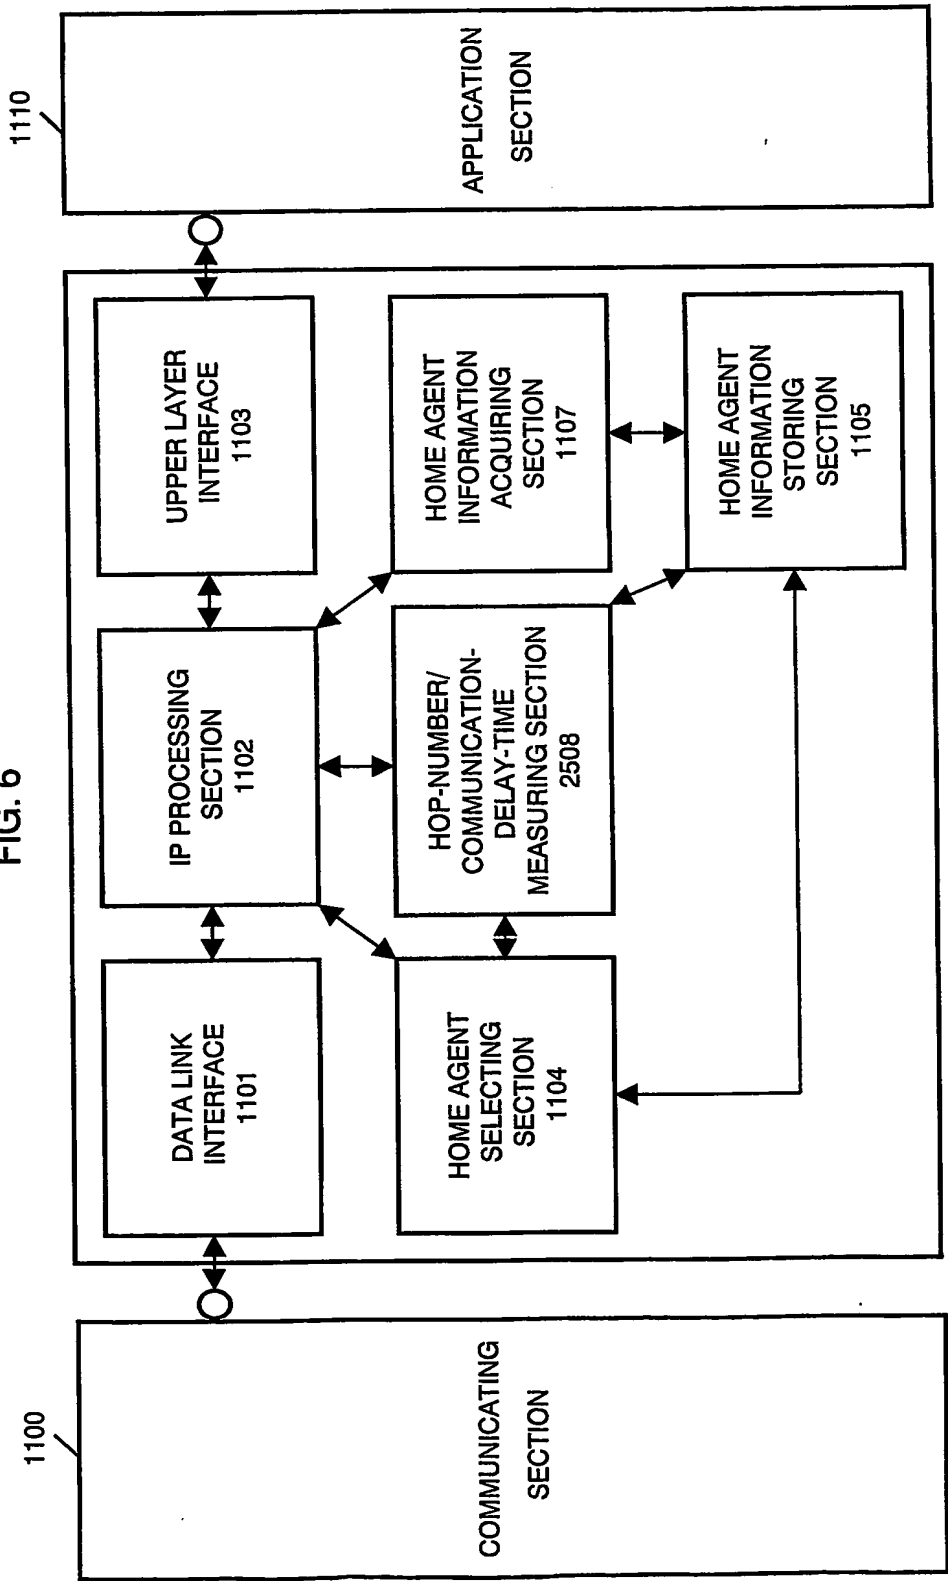

7/35

FIG. 7


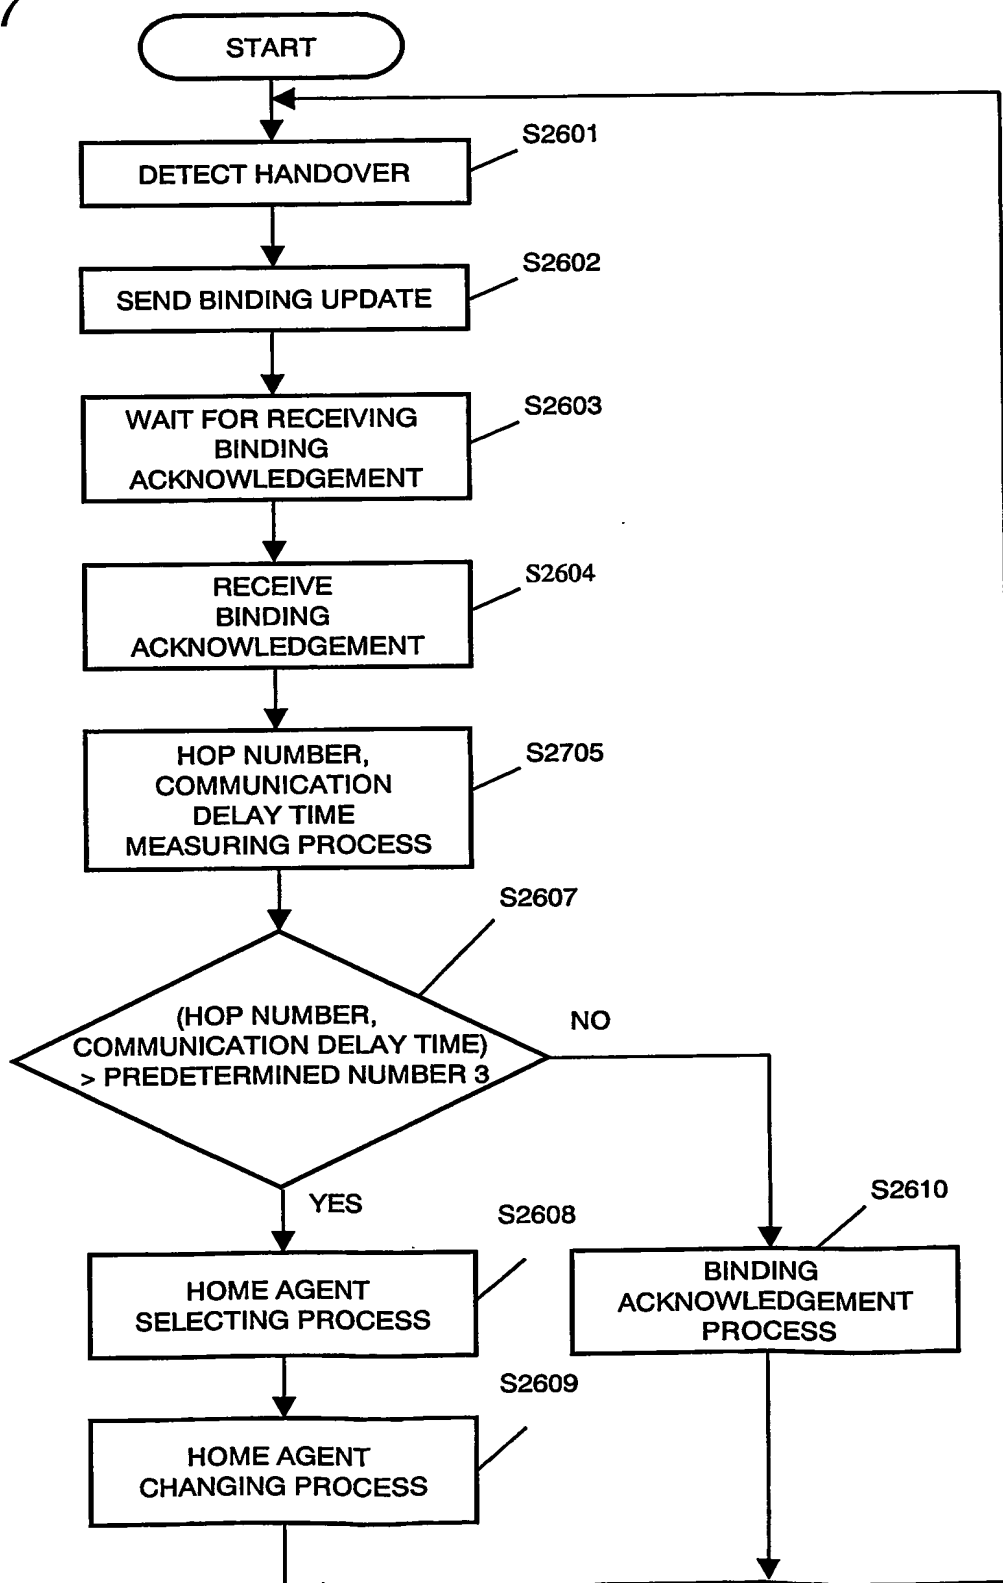


FIG. 8

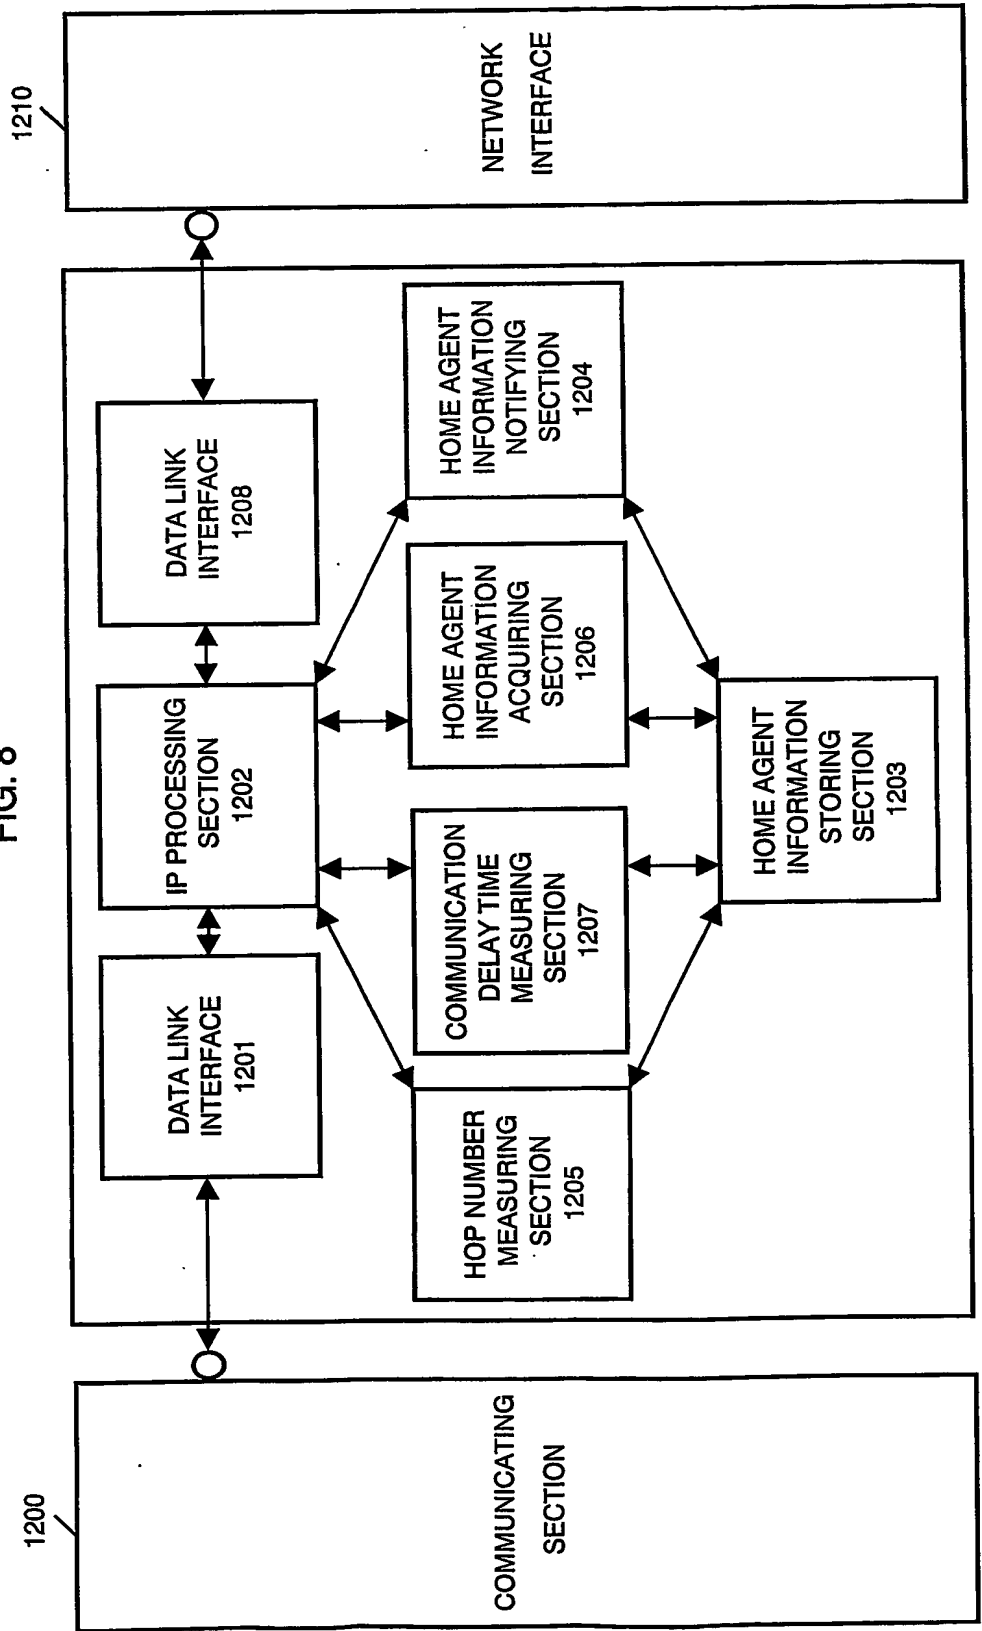

3500

3501 Home Agent	3502 Prefixes	3503 Access Routers	3504 Information
1:2:2:3:4:5:6:7	1:2:3:0::0/48	AR1~16	Load = High Resource = OK
	1:2:4:0::0/48	AR17~32	
1:2:5:6:7:8:9:1	1:2:5:0::0/48	AR33~38	Resource = Empty
⋮	⋮	⋮	⋮


FIG. 9A

3510

3501 Home Agent	3504 Information	3505 Hop	3507 Delay
1:2:2:3:4:5:6:7	Load = High Resource = OK	13	100msec
1:2:5:6:7:8:9:1	Resource = Empty	12	90msec
⋮	⋮	⋮	⋮

FIG. 9B

FIG. 10

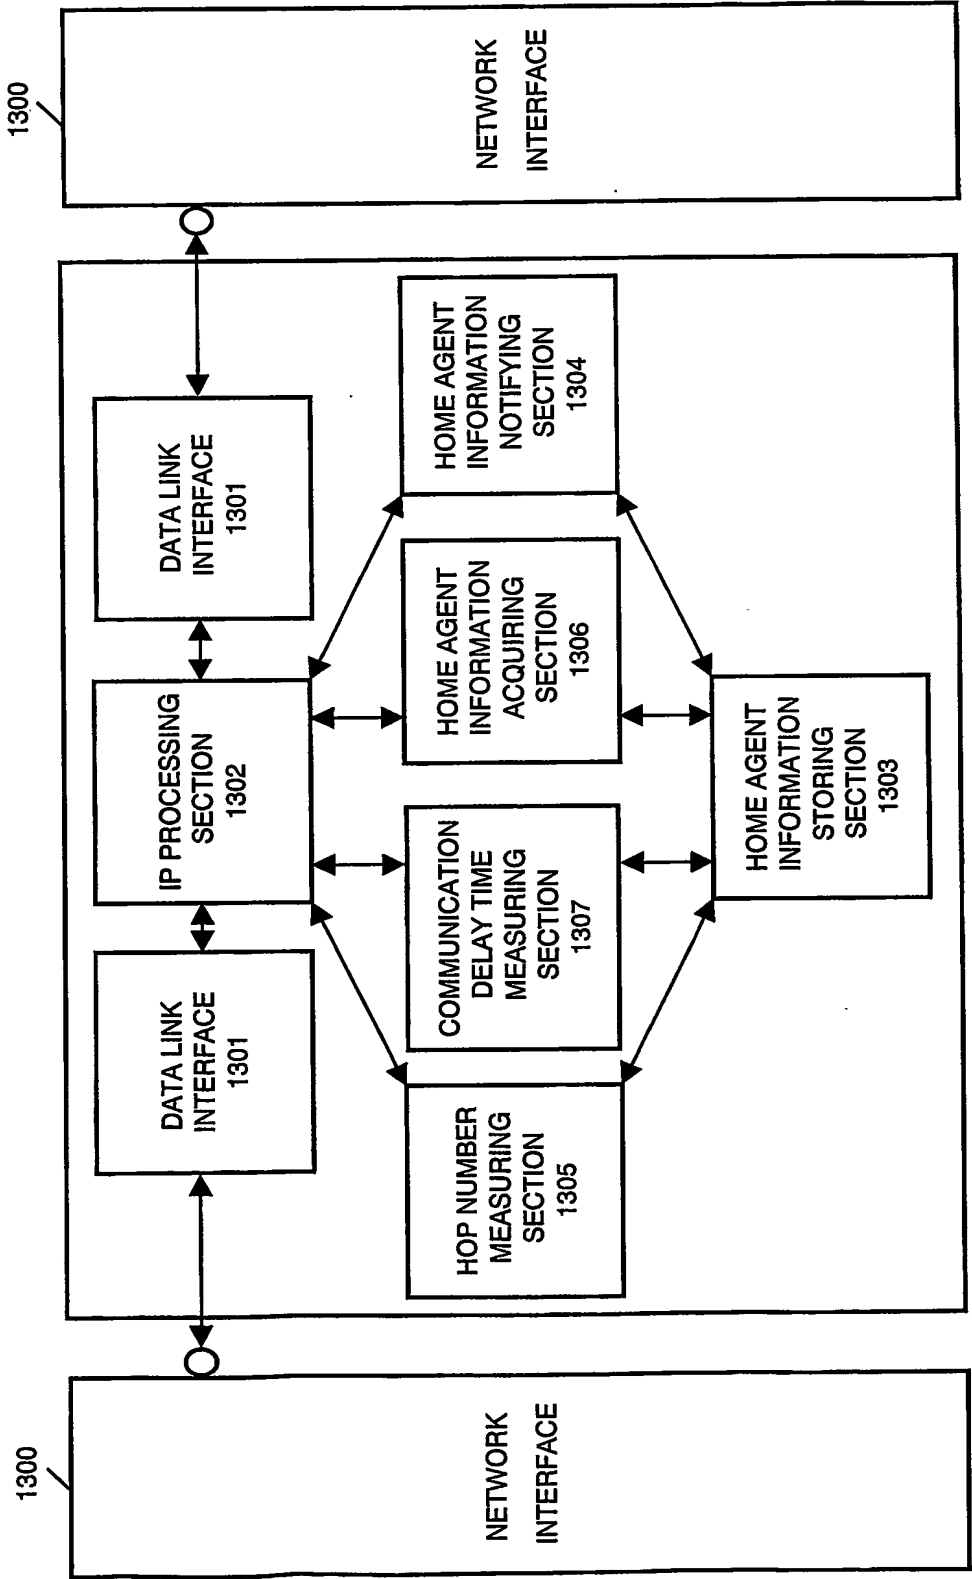


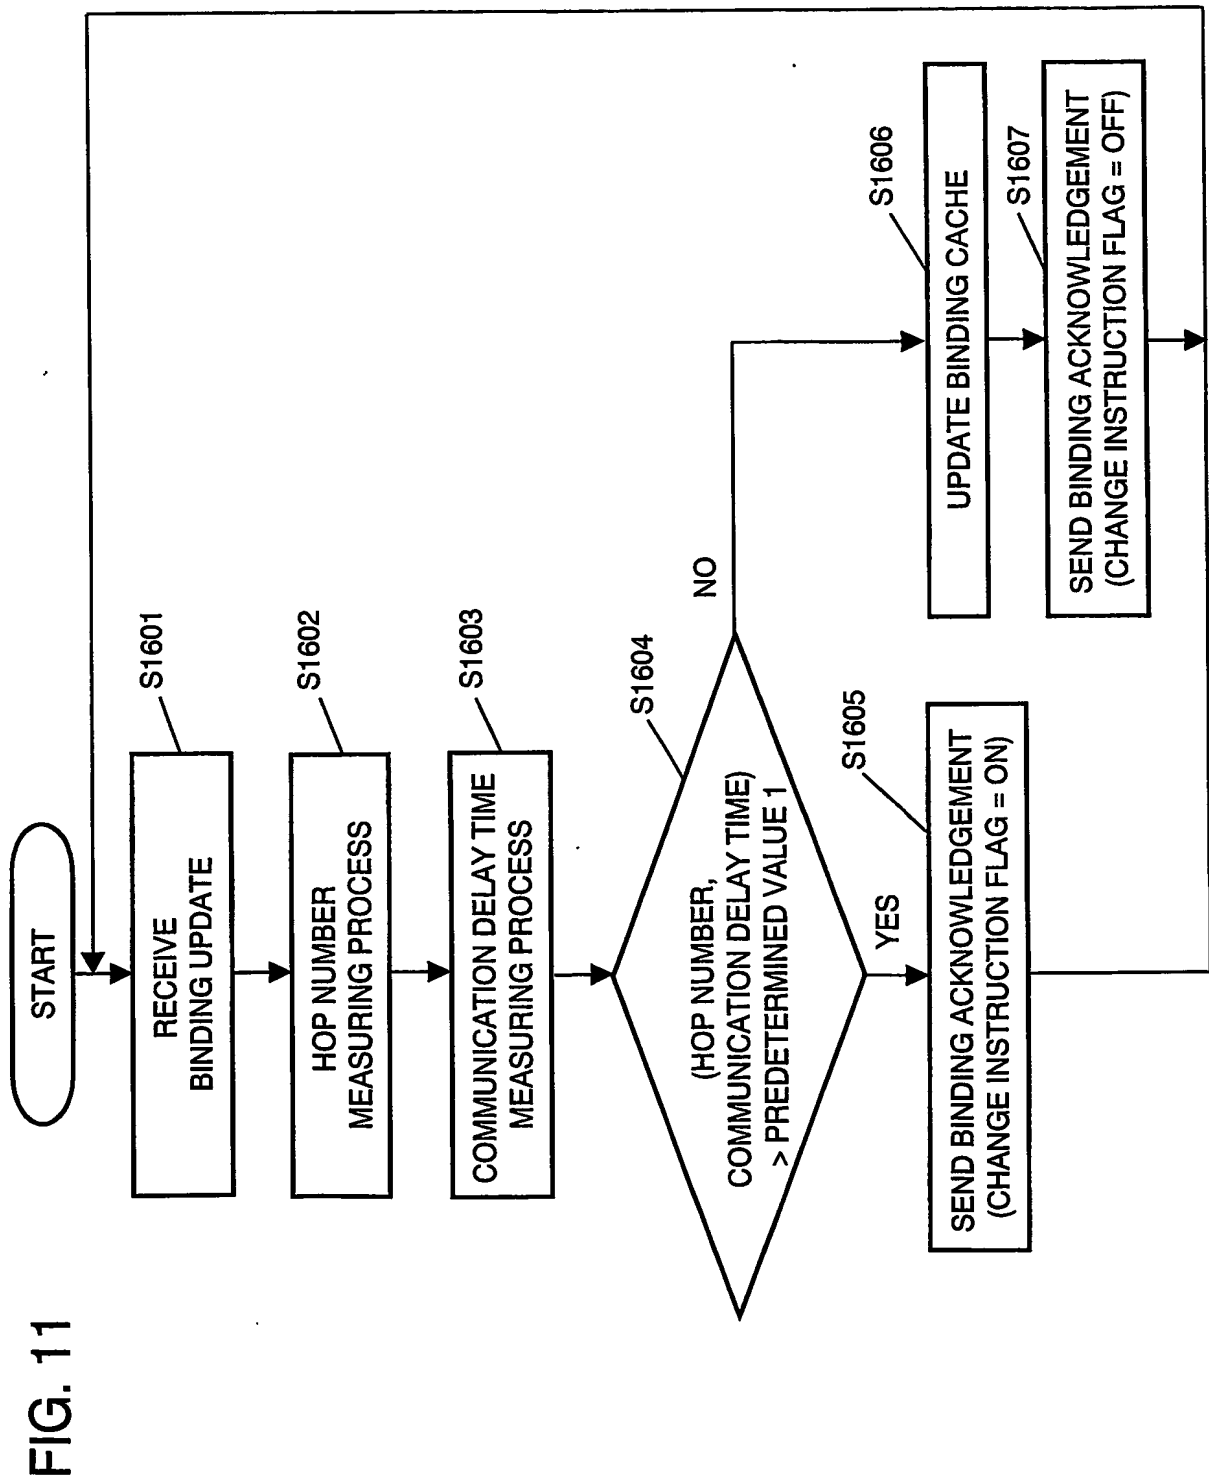


FIG. 12

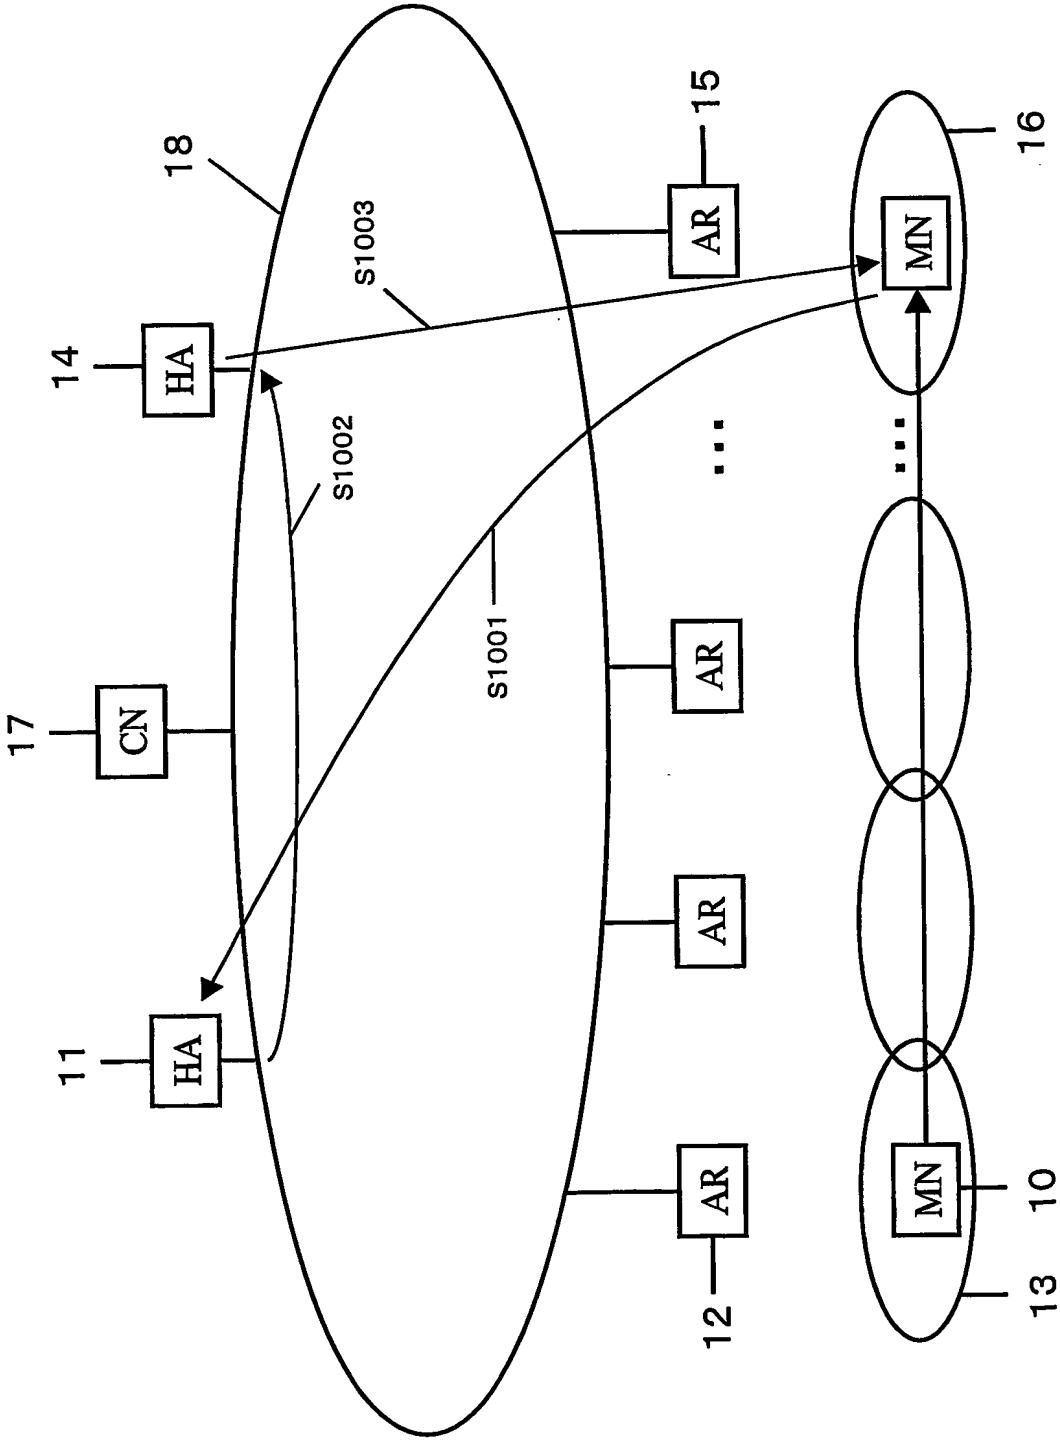

13/35

FIG. 13

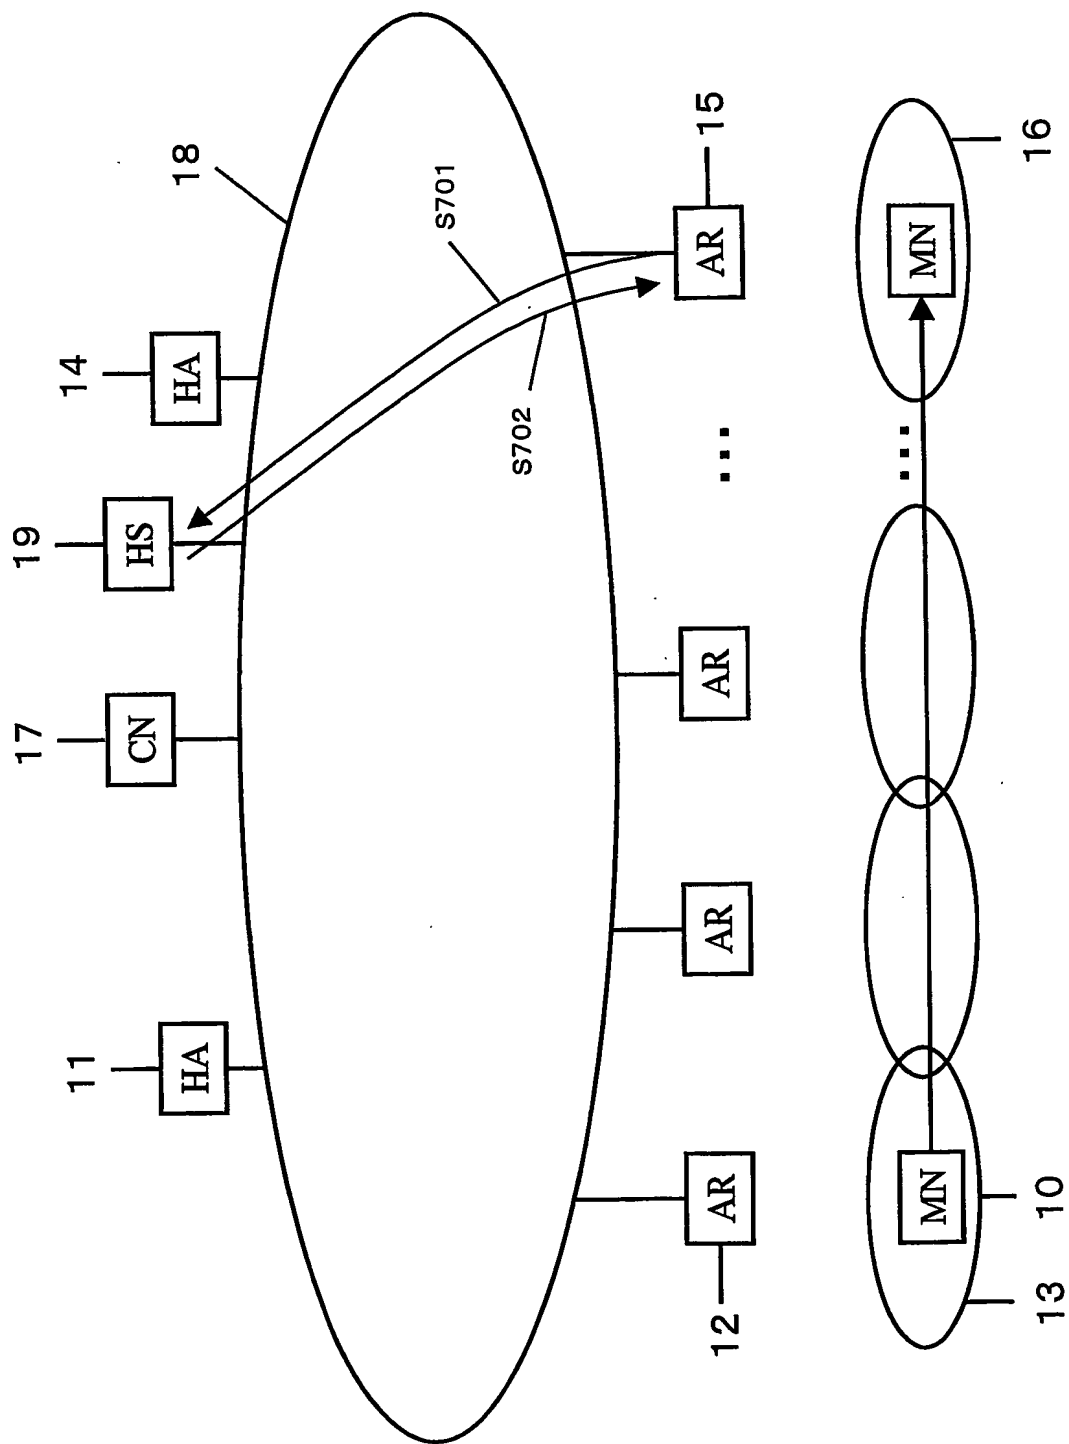


FIG. 14

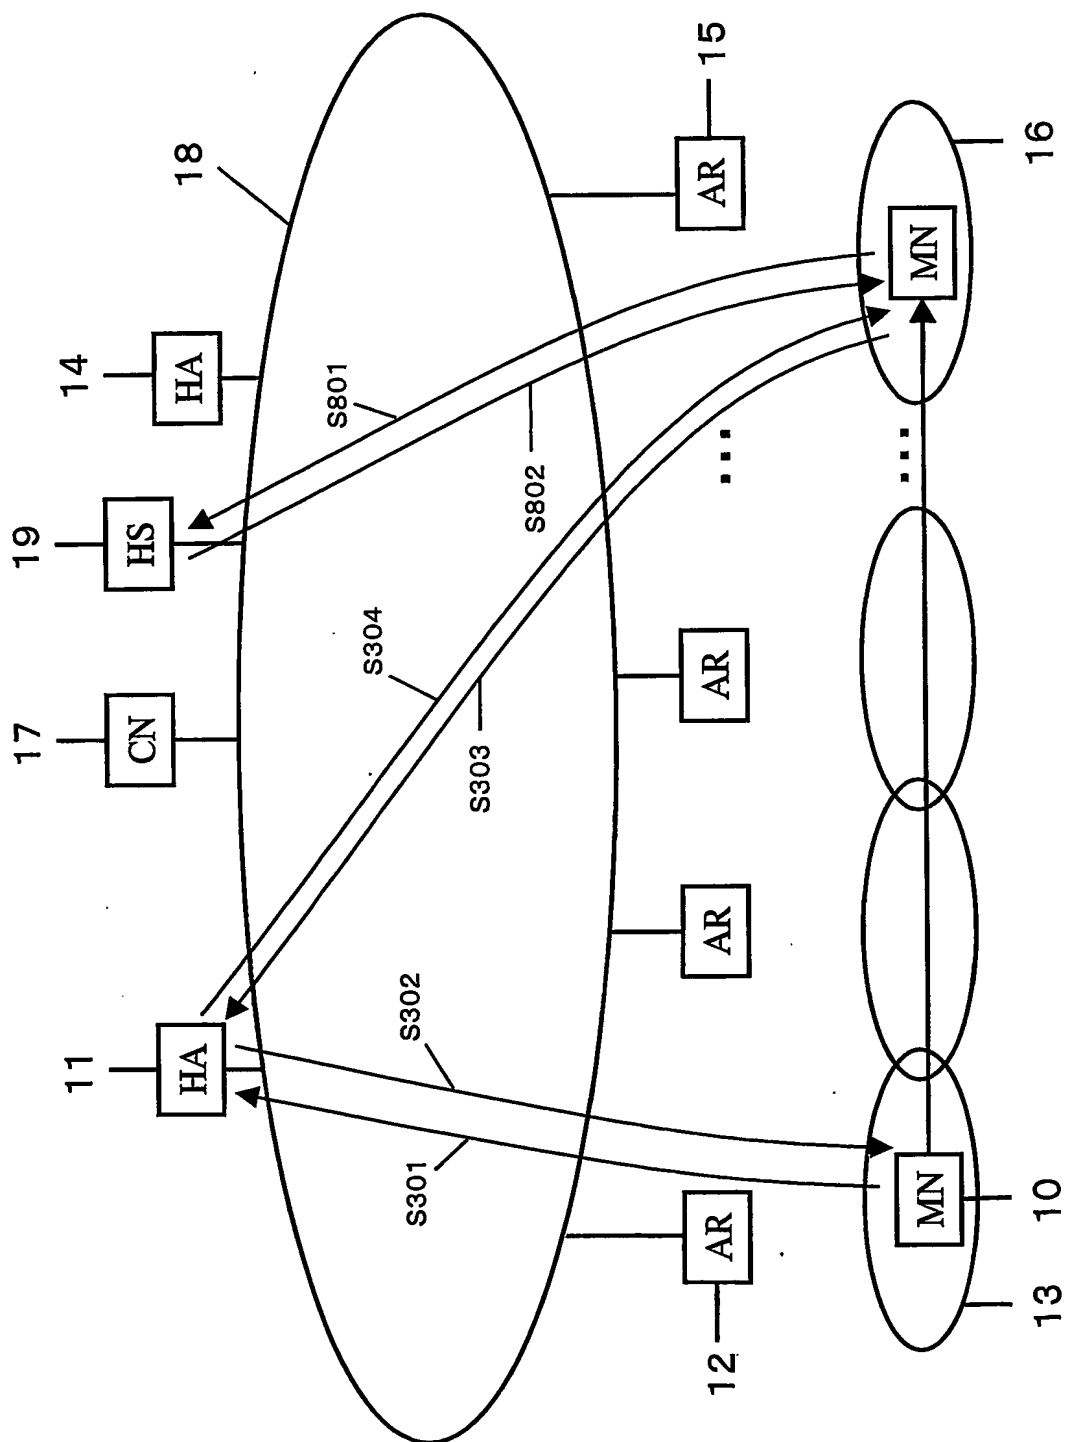


FIG. 15A

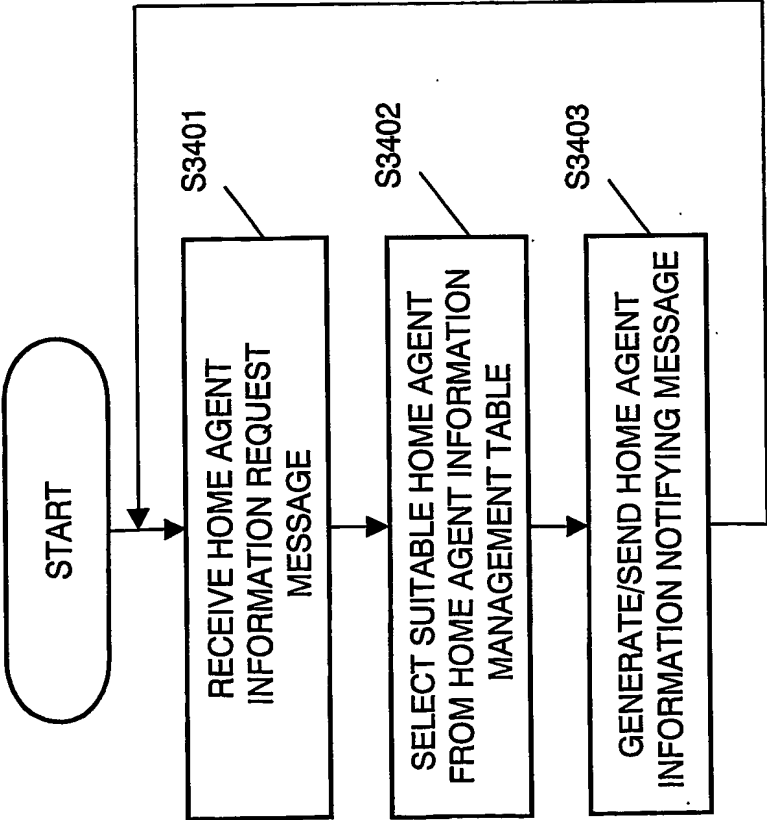


FIG. 15B

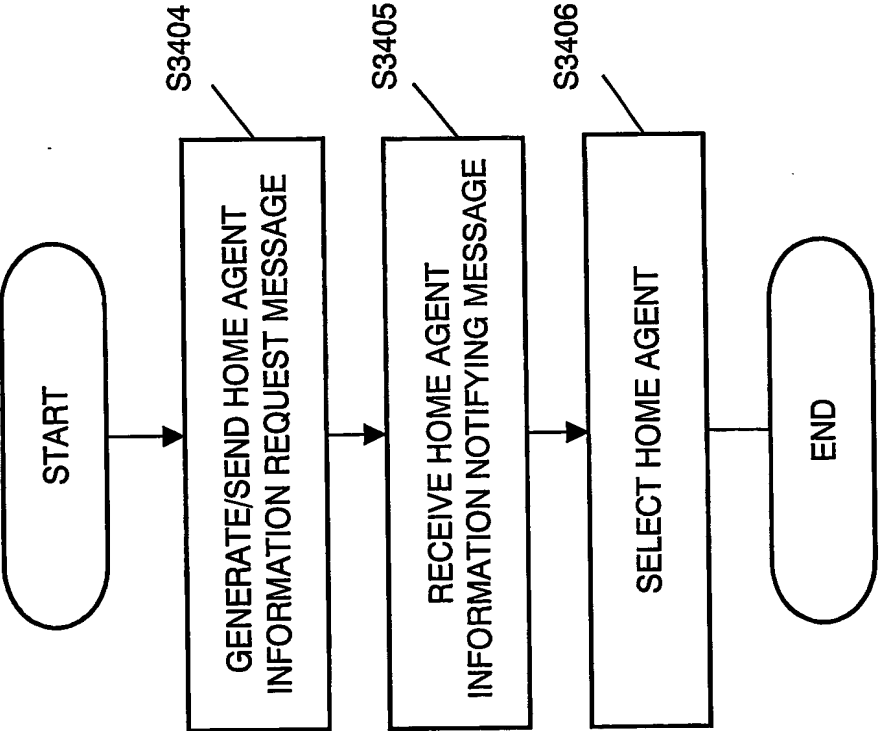


FIG. 16

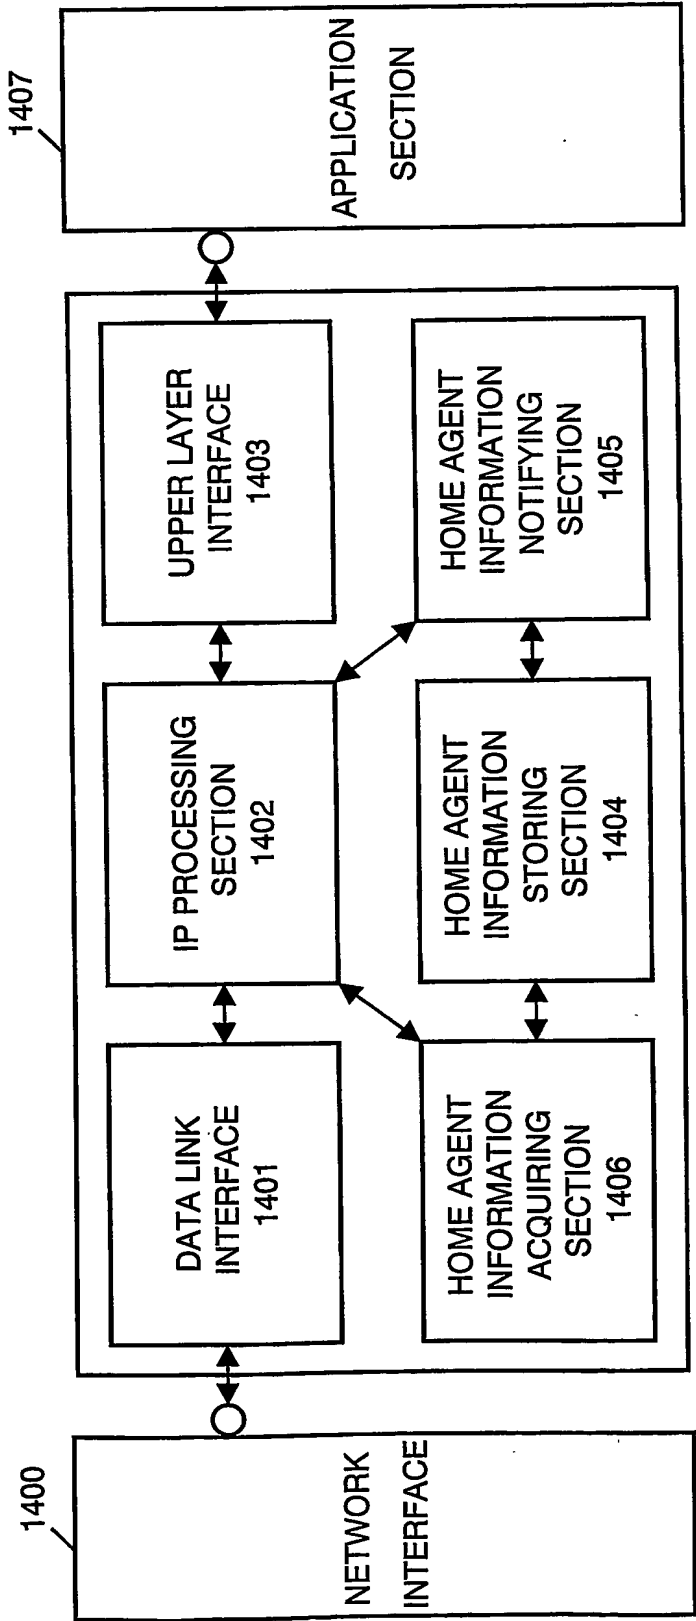


FIG. 17

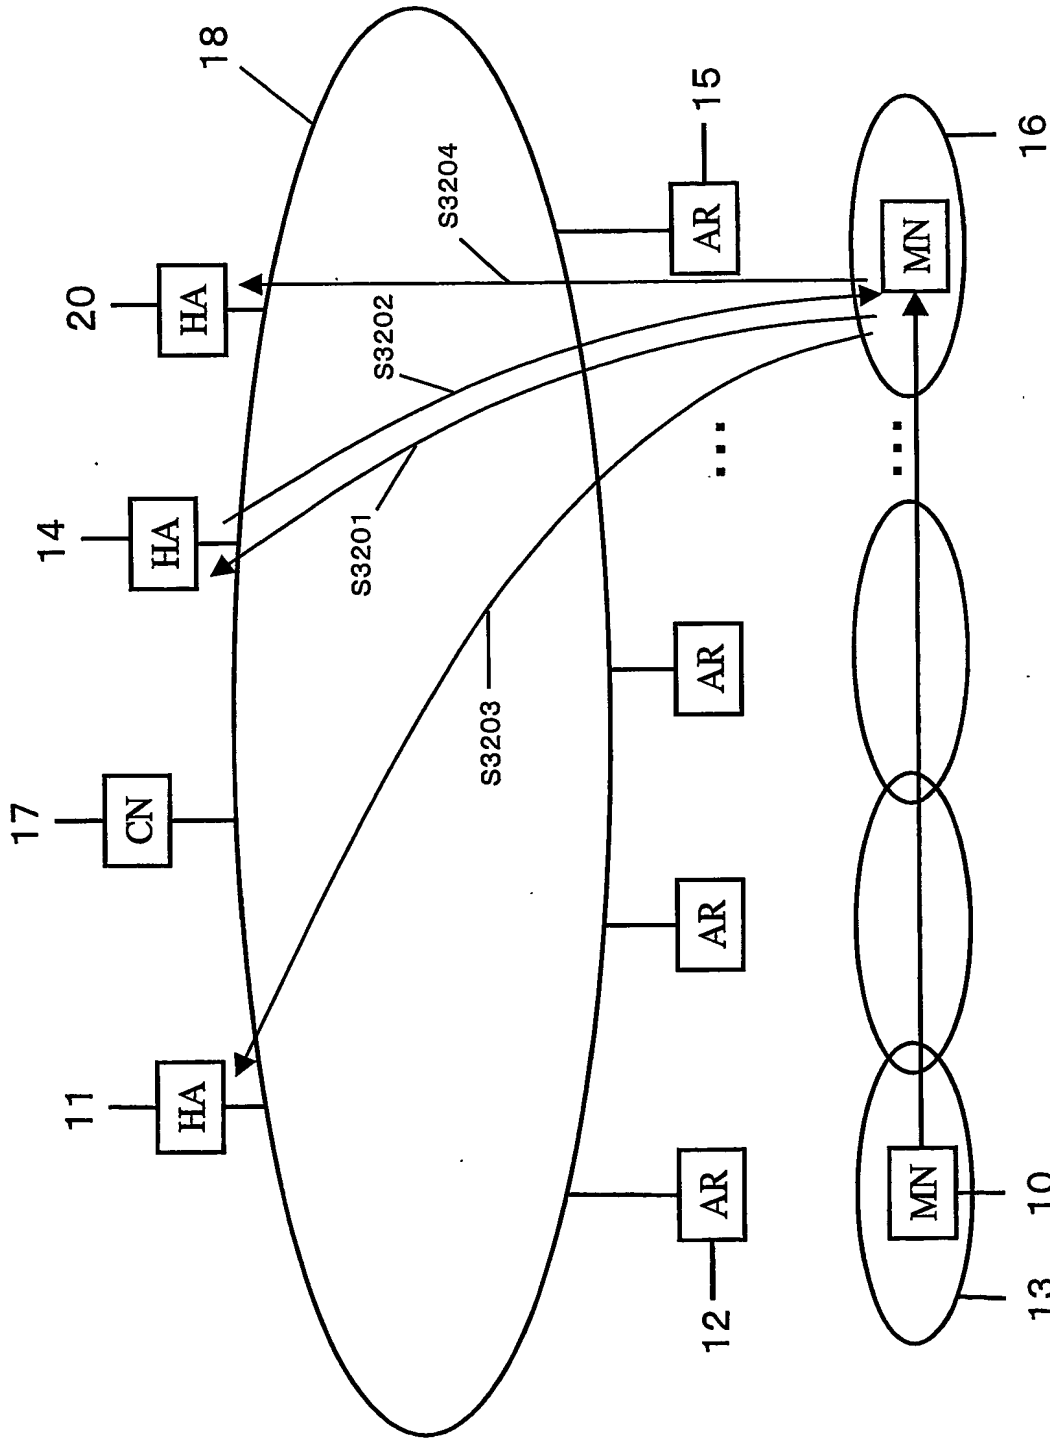


FIG. 18



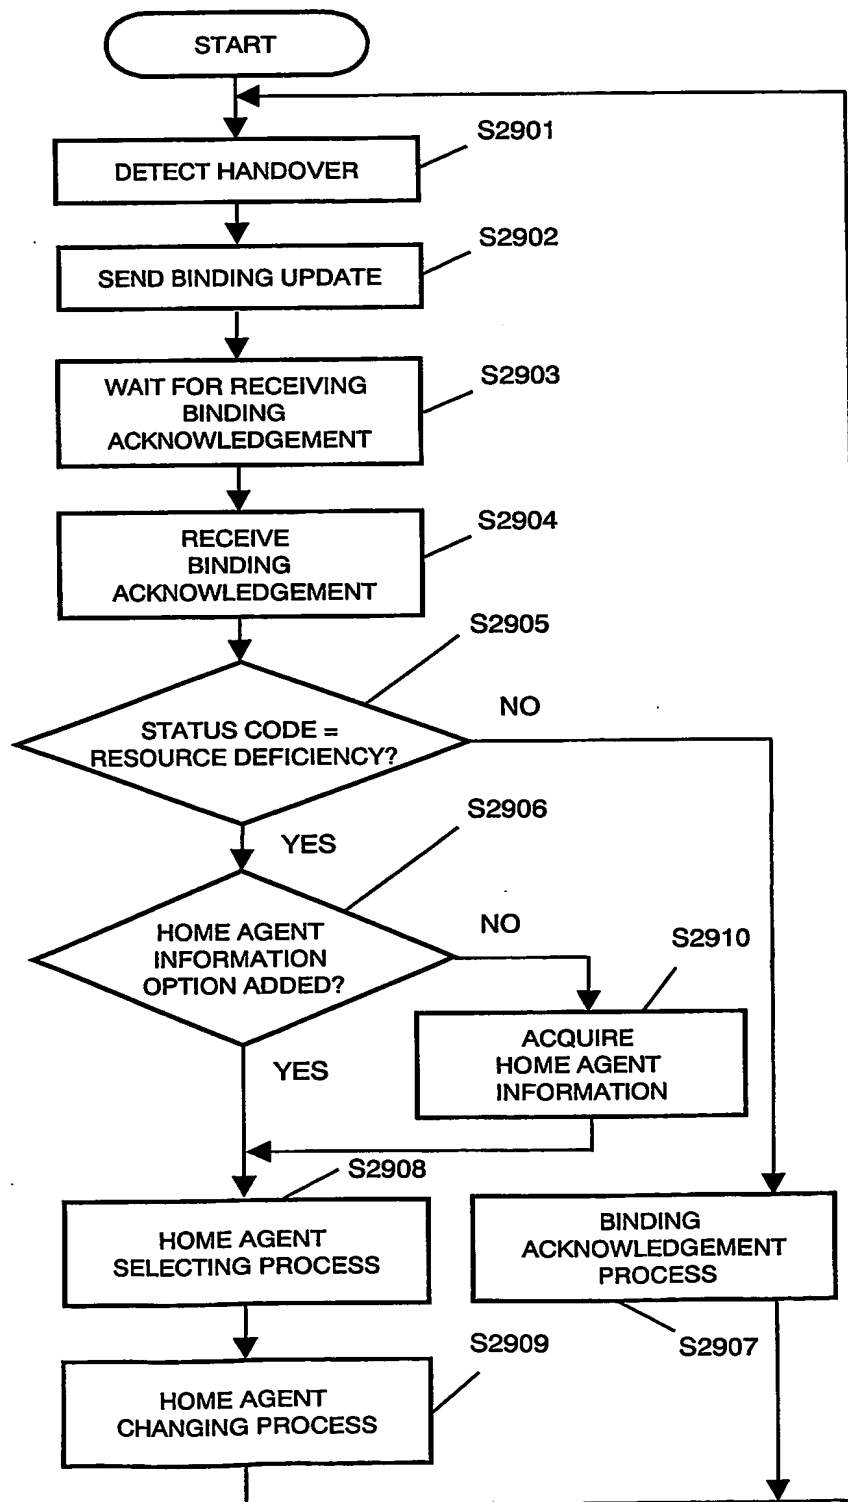



FIG. 19

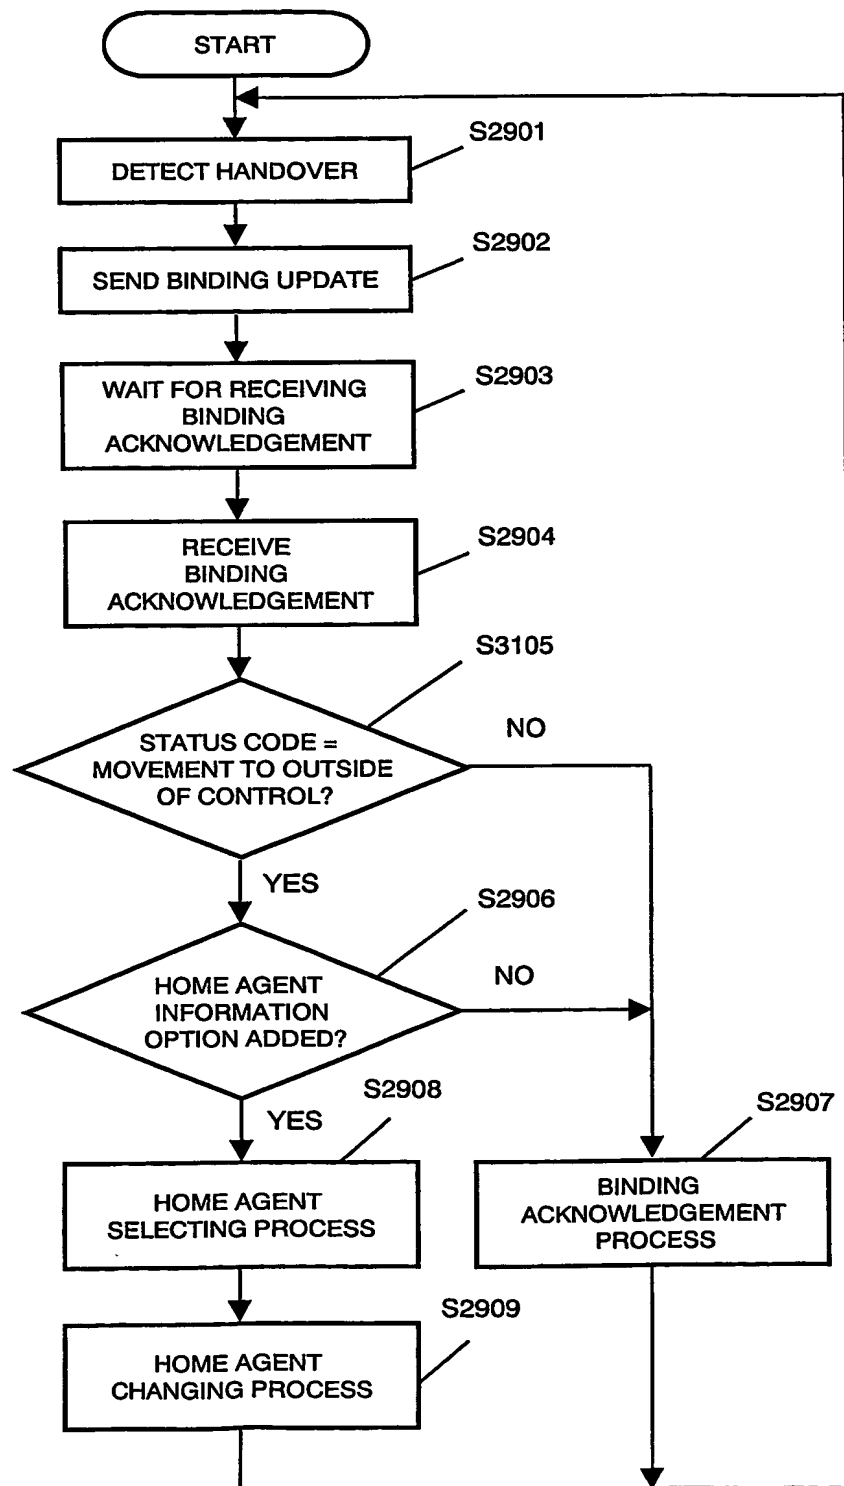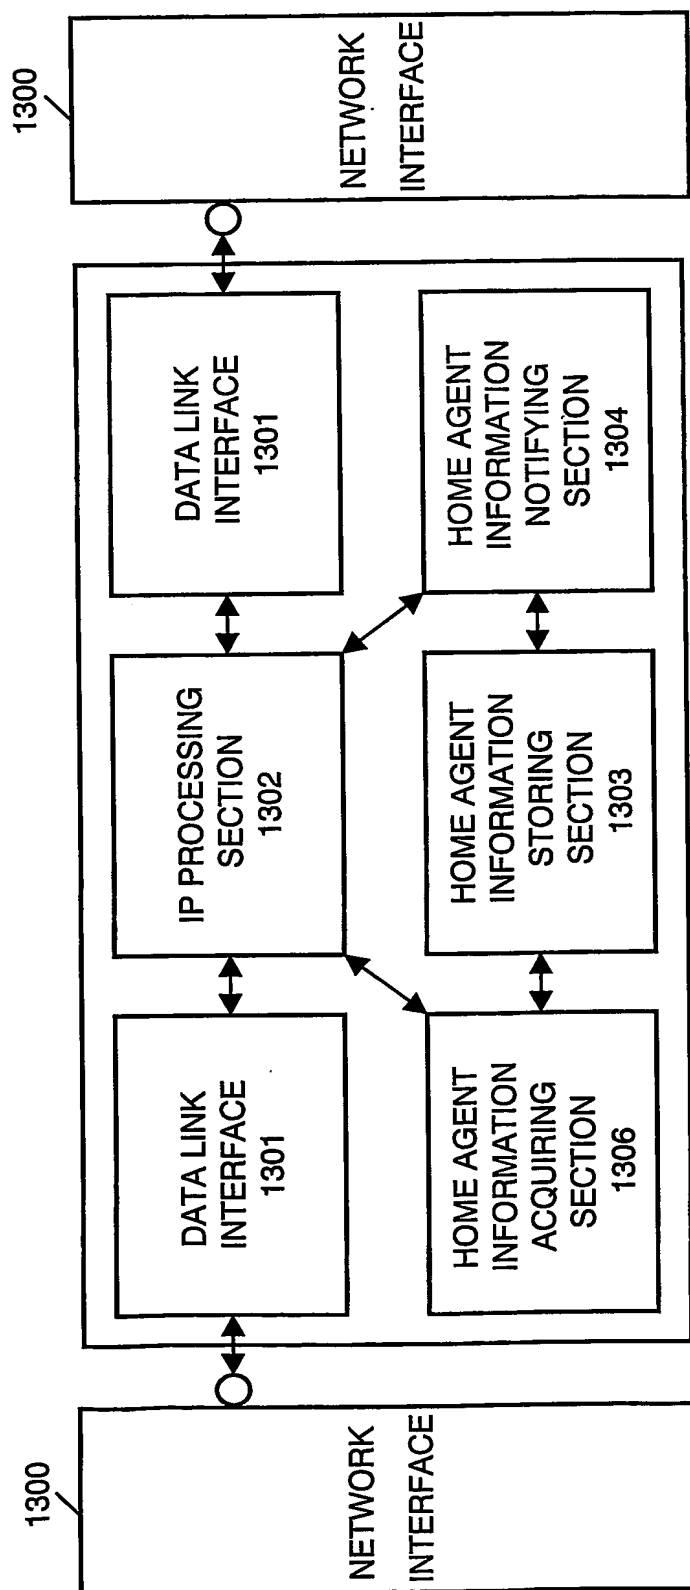

20/35

FIG. 20



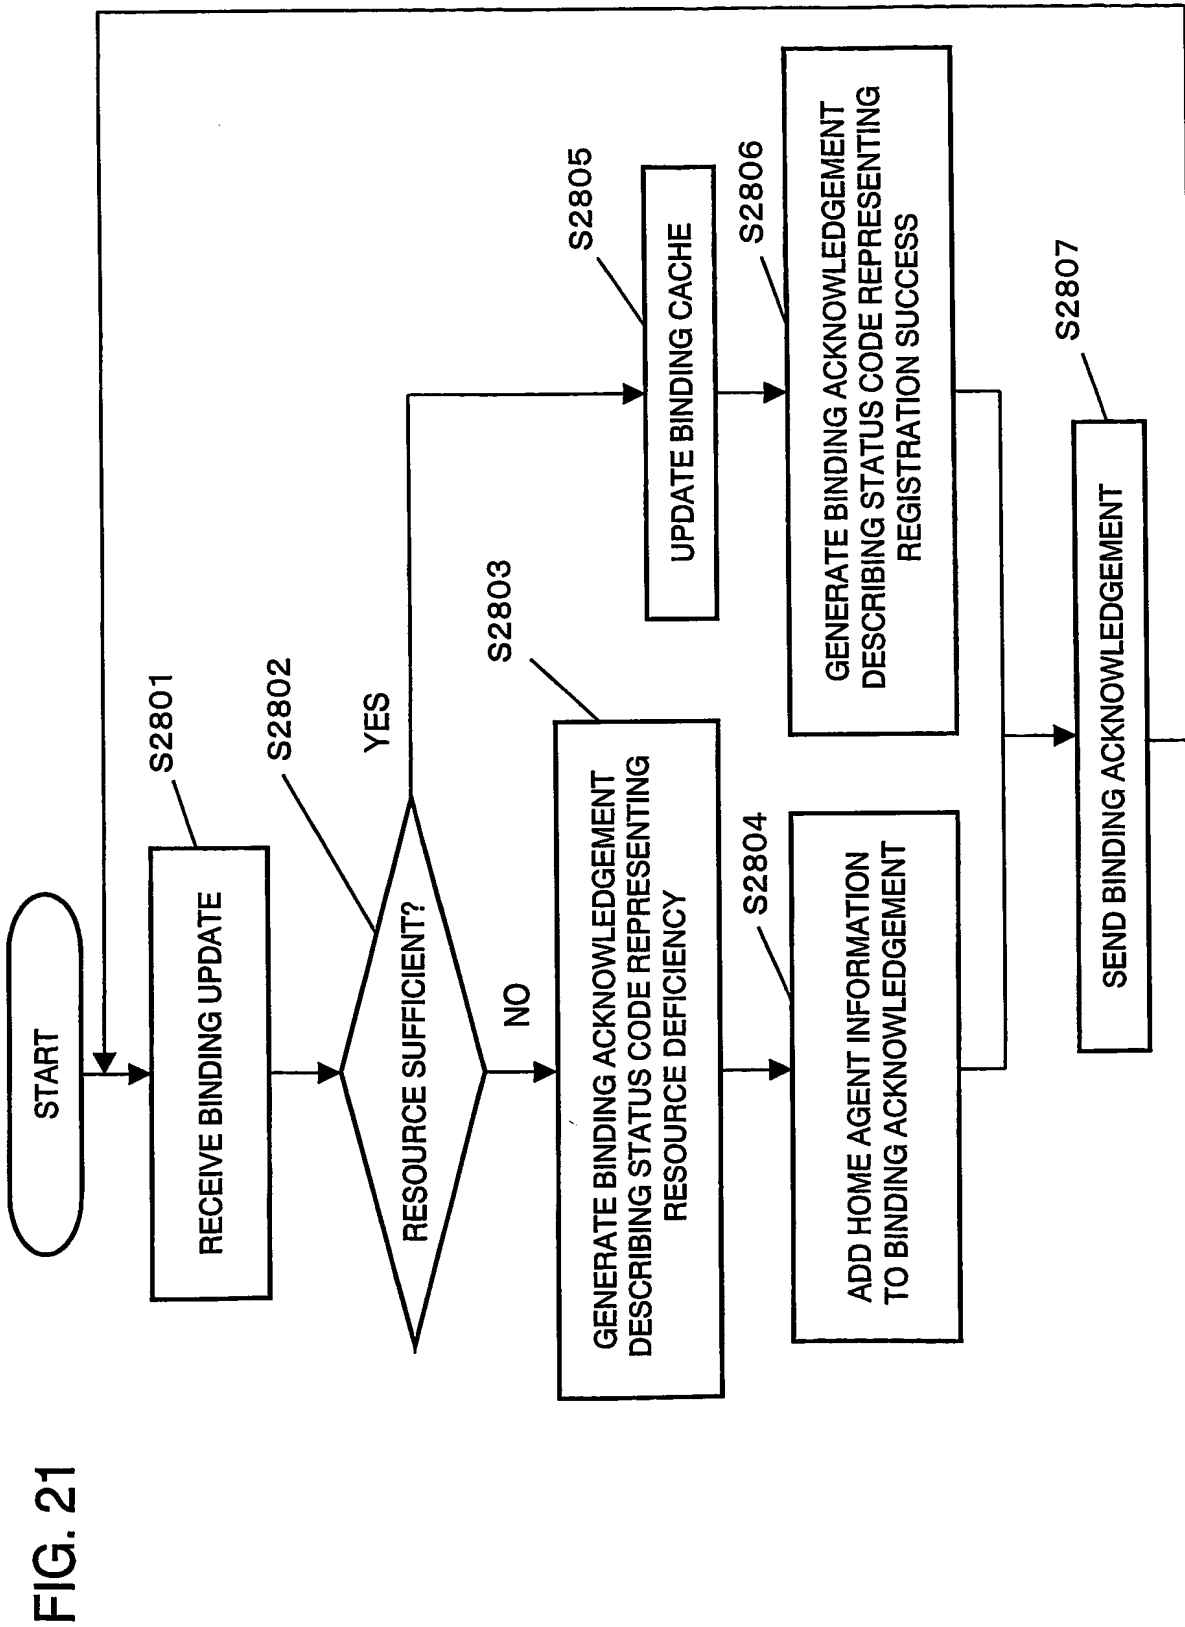

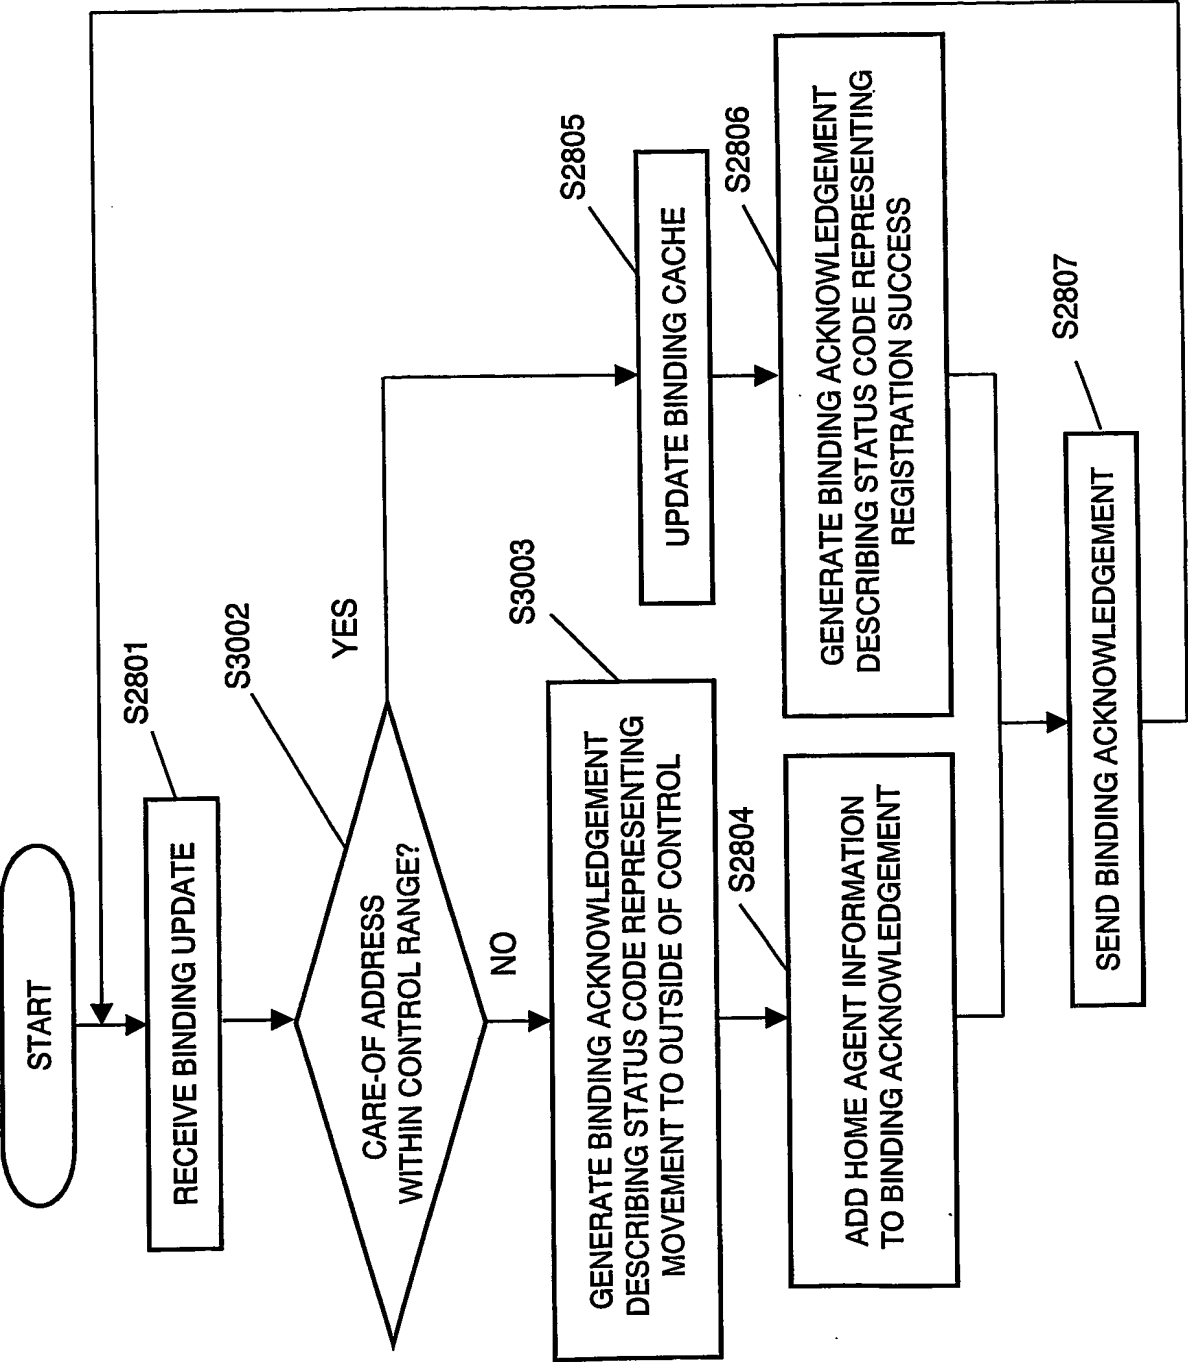


FIG. 23


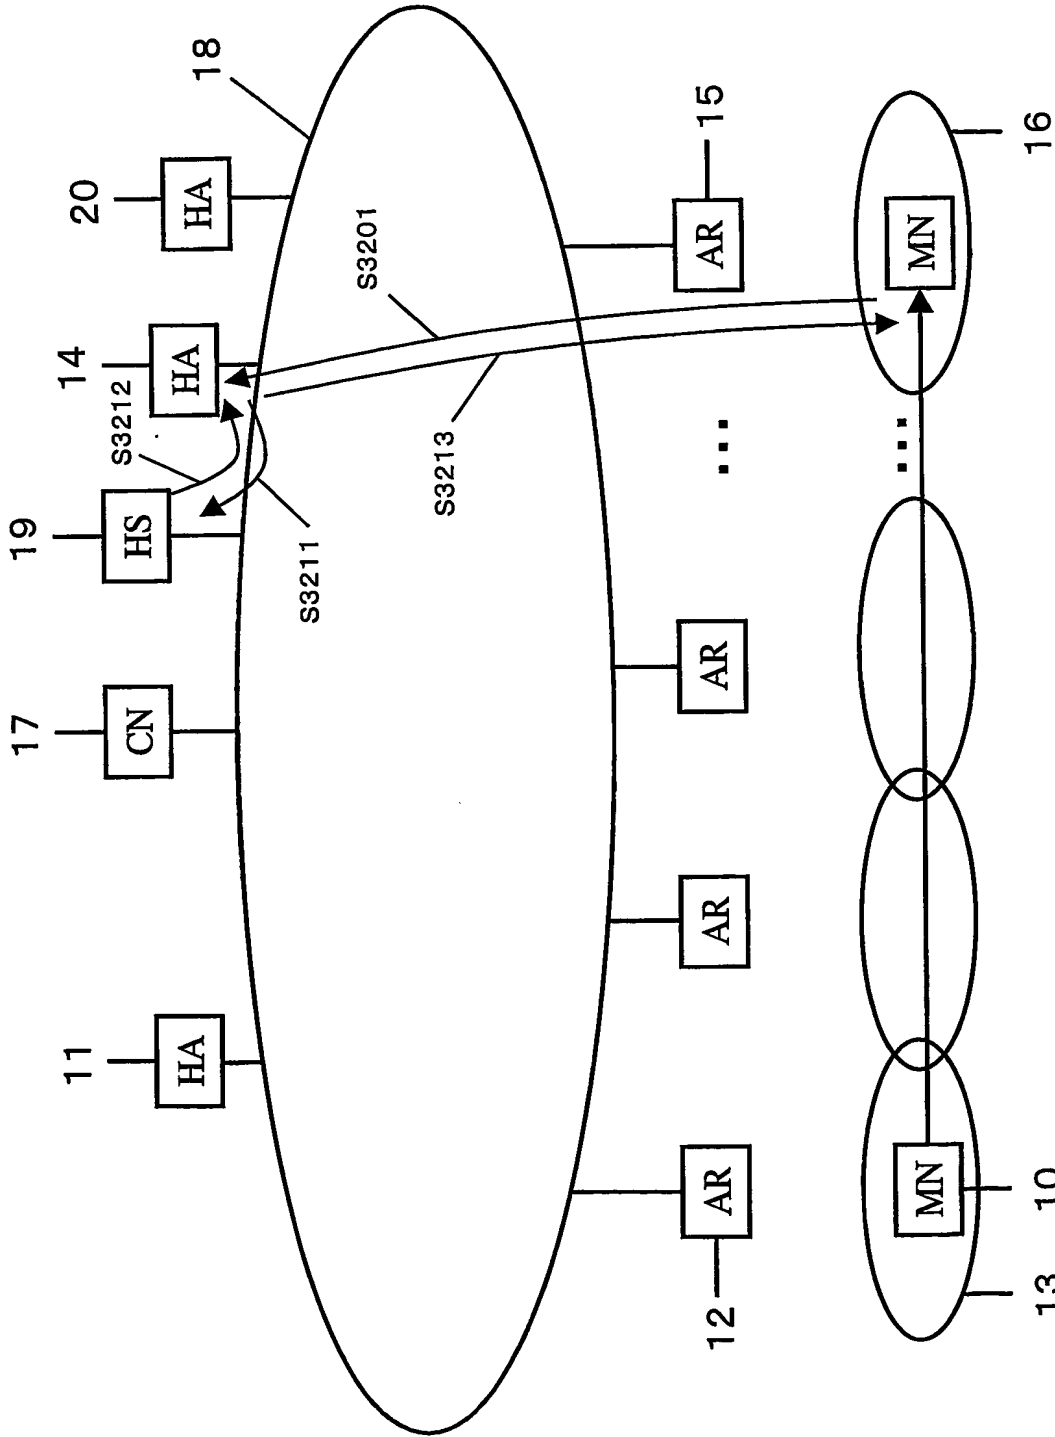
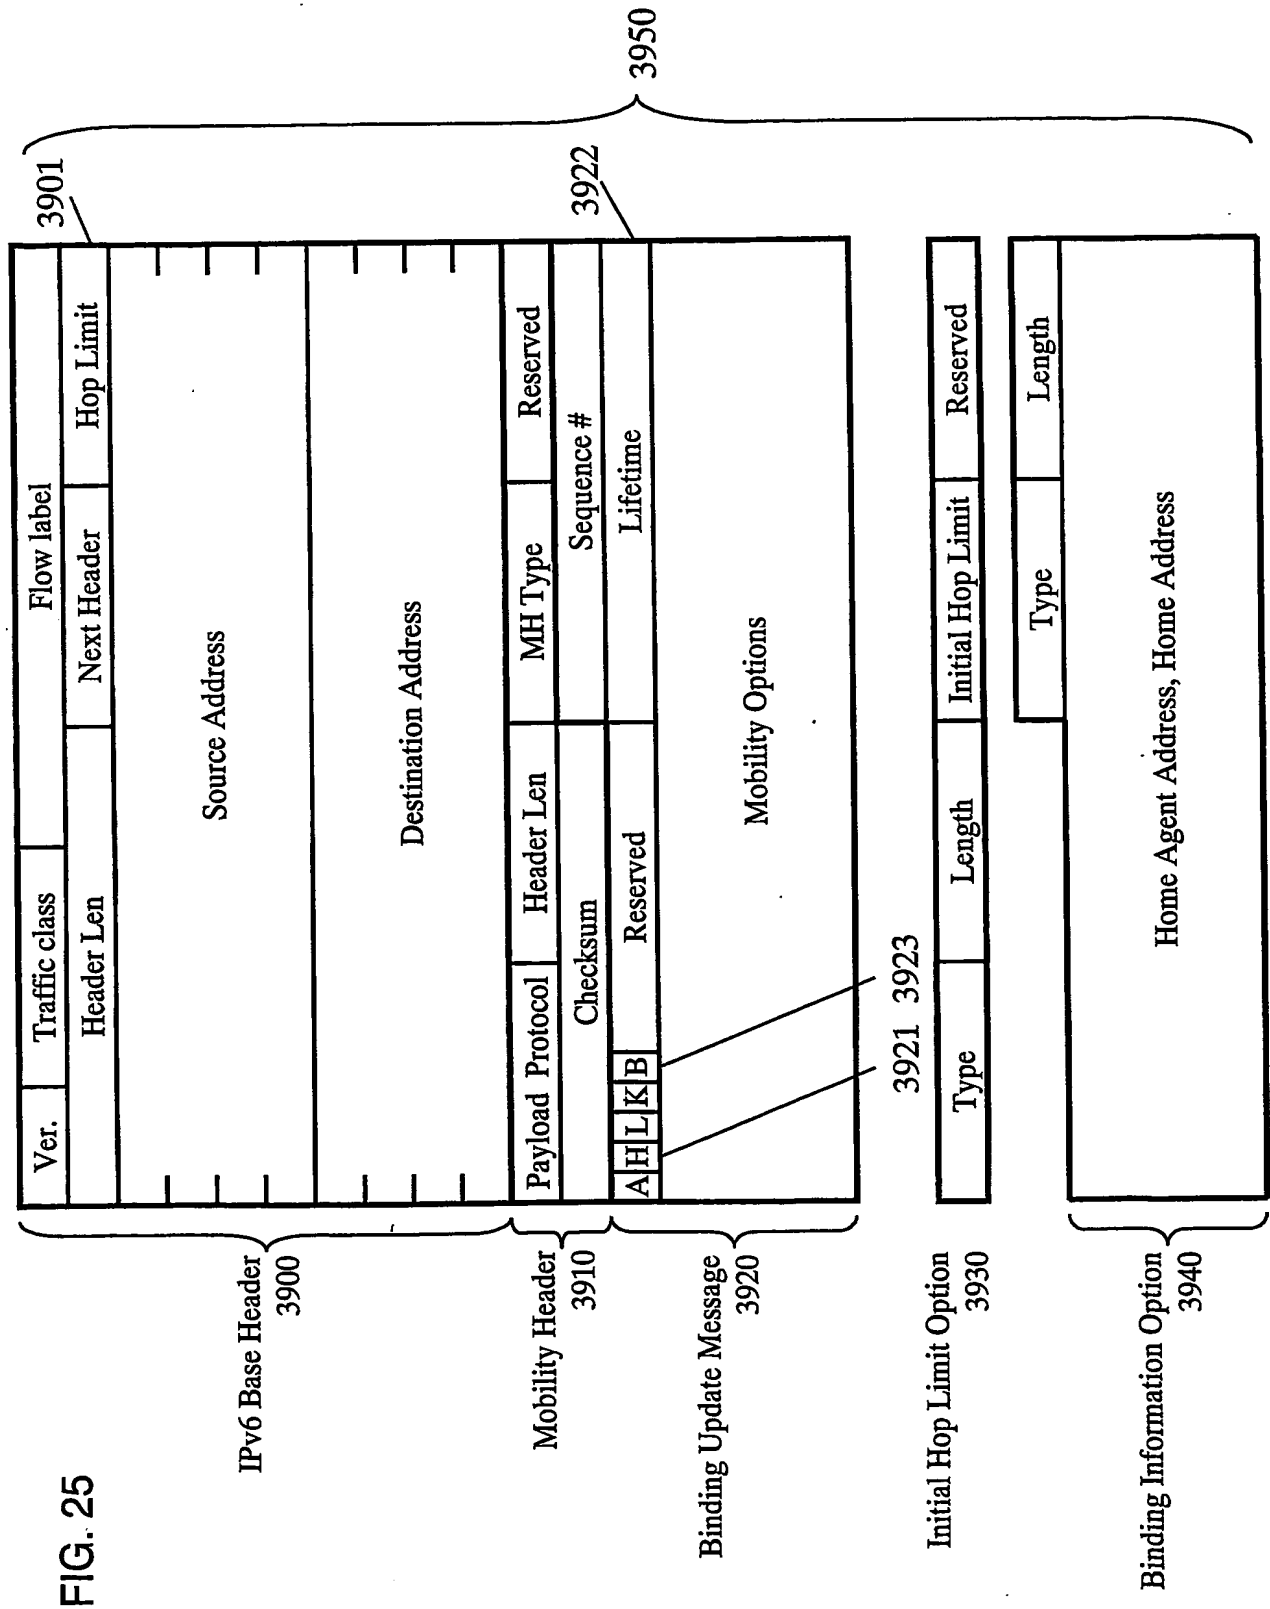
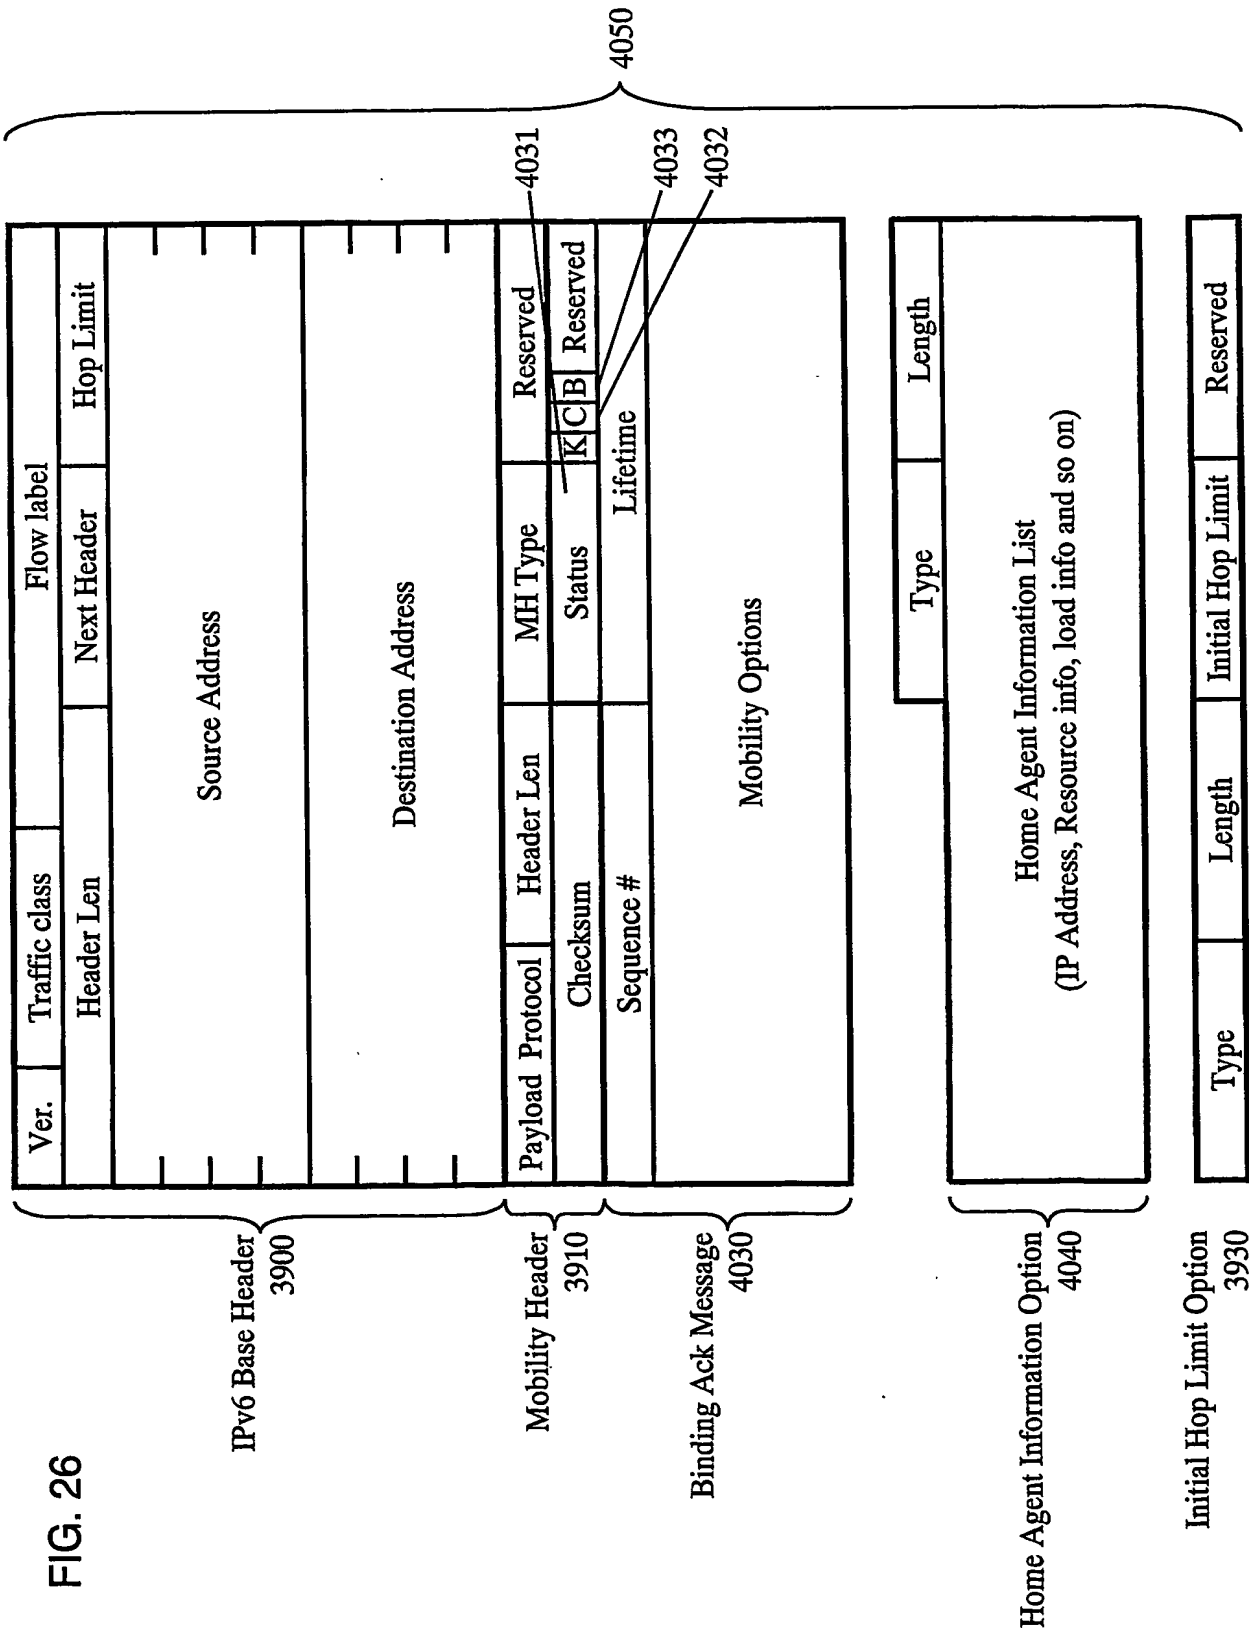
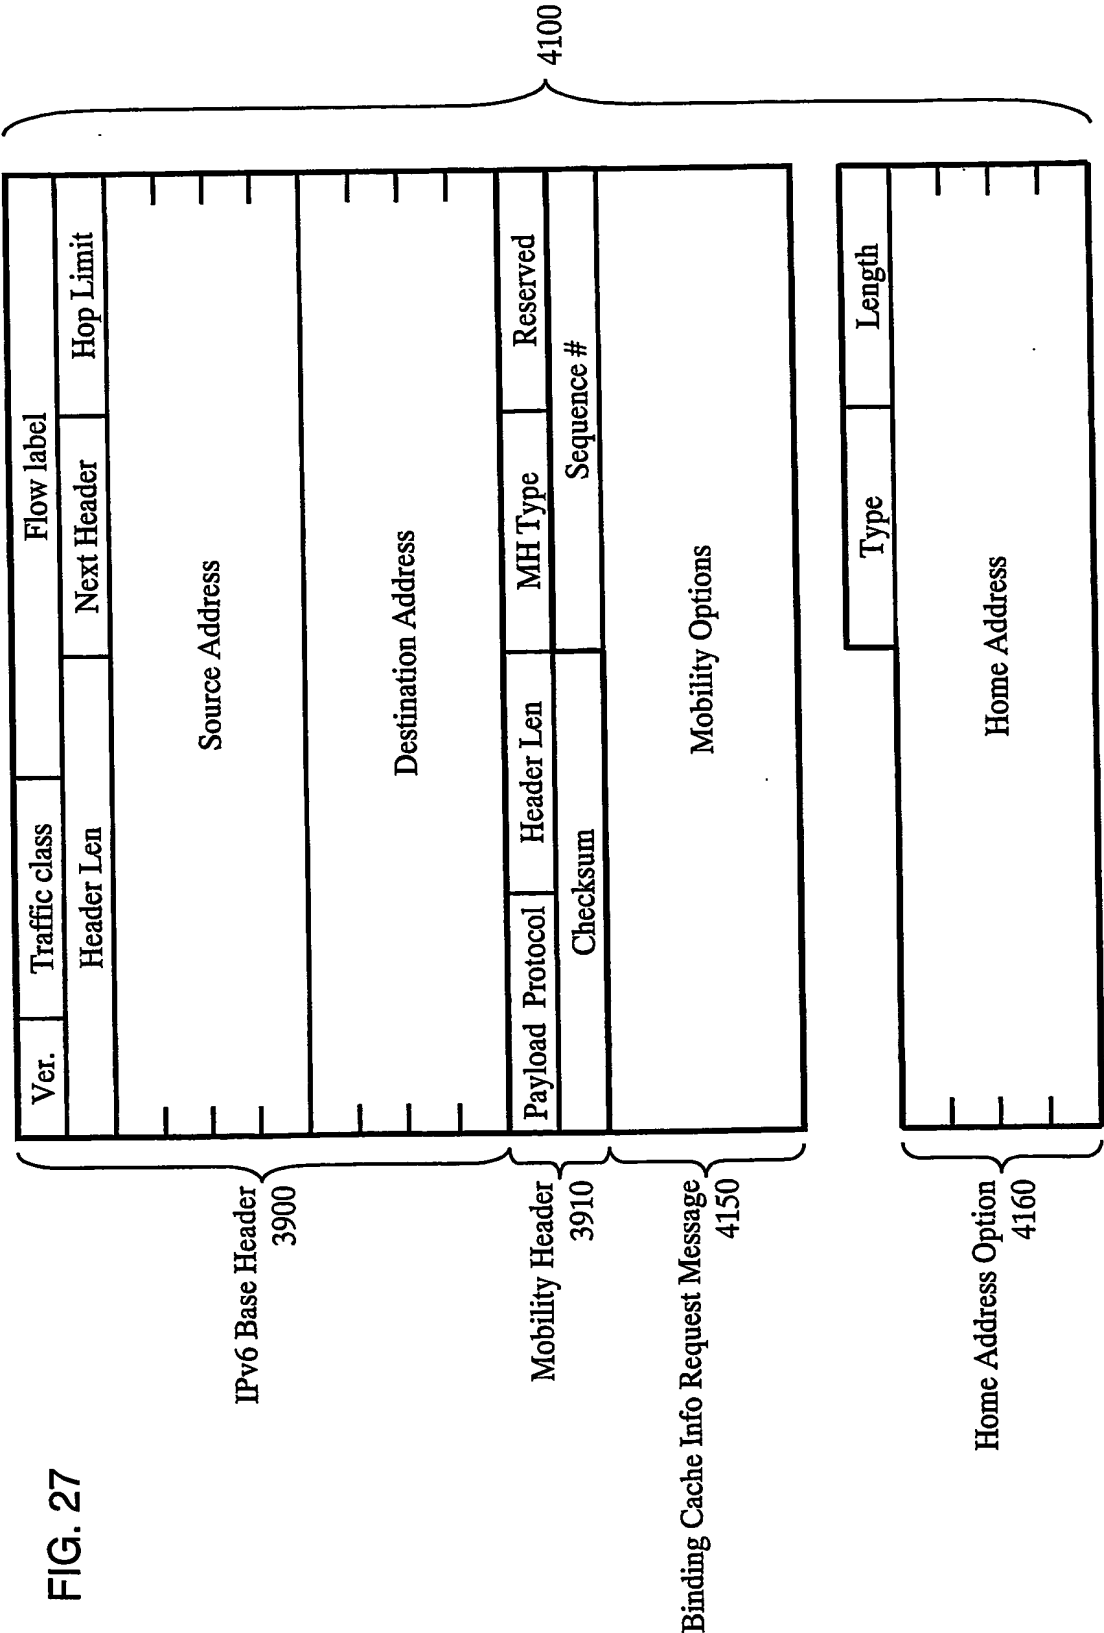



FIG. 24










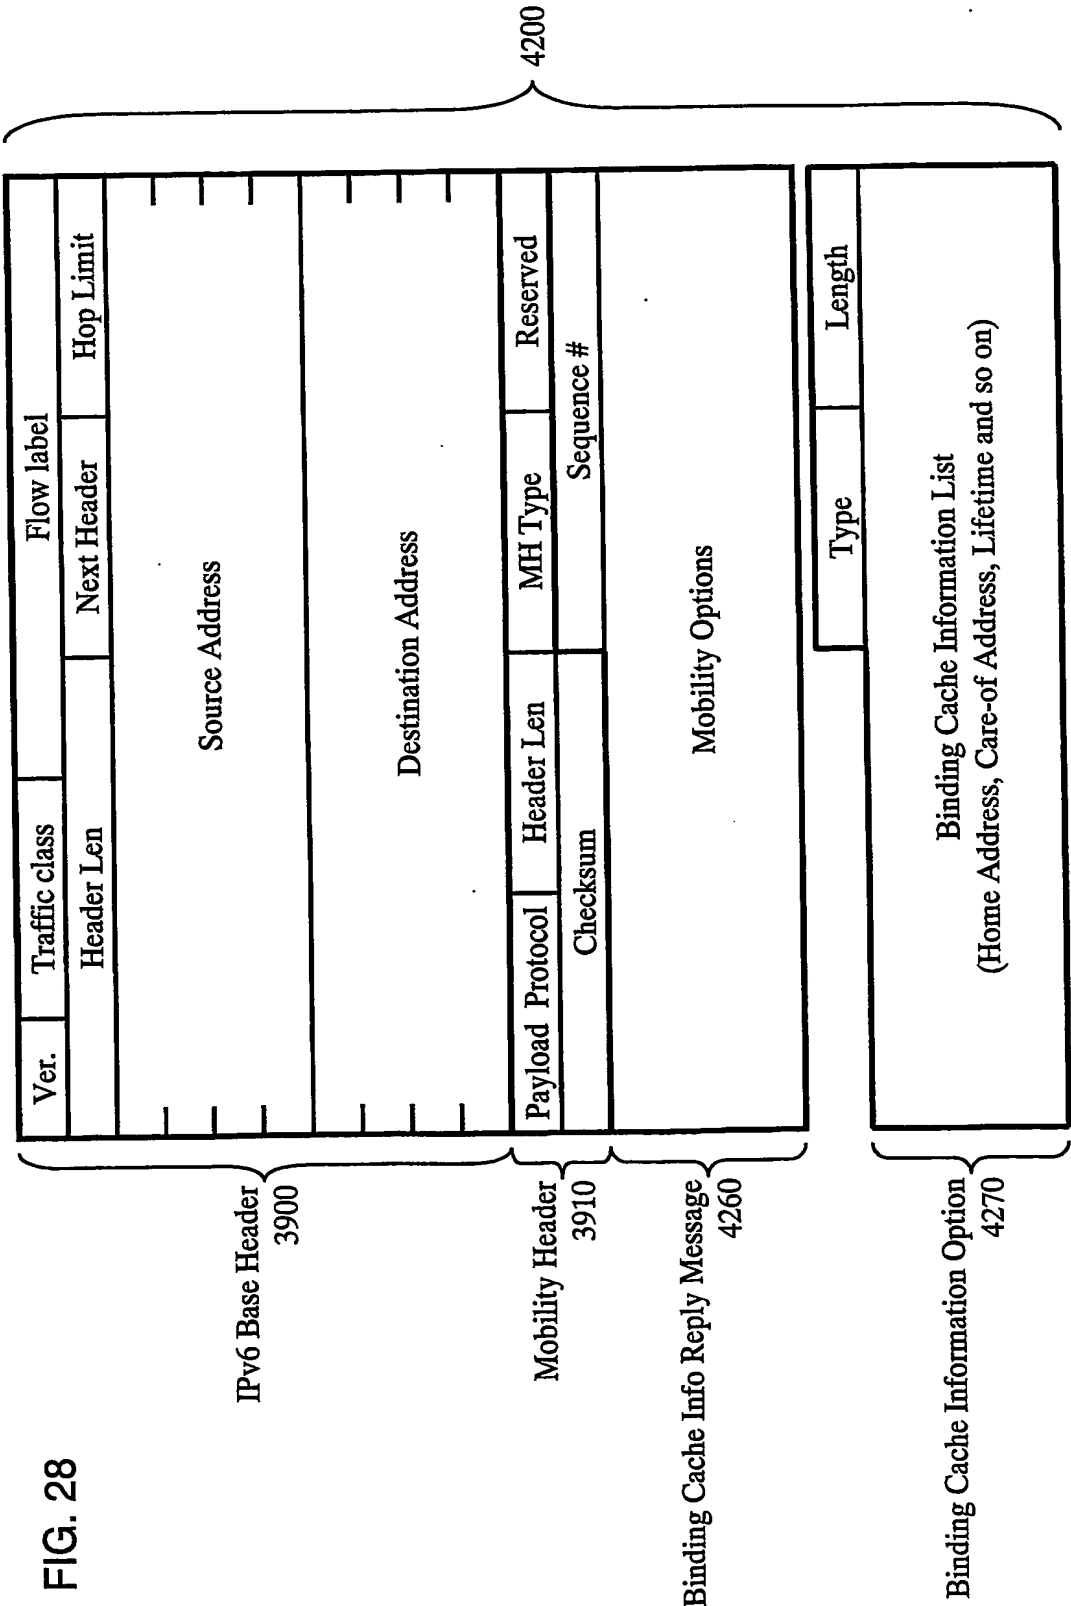

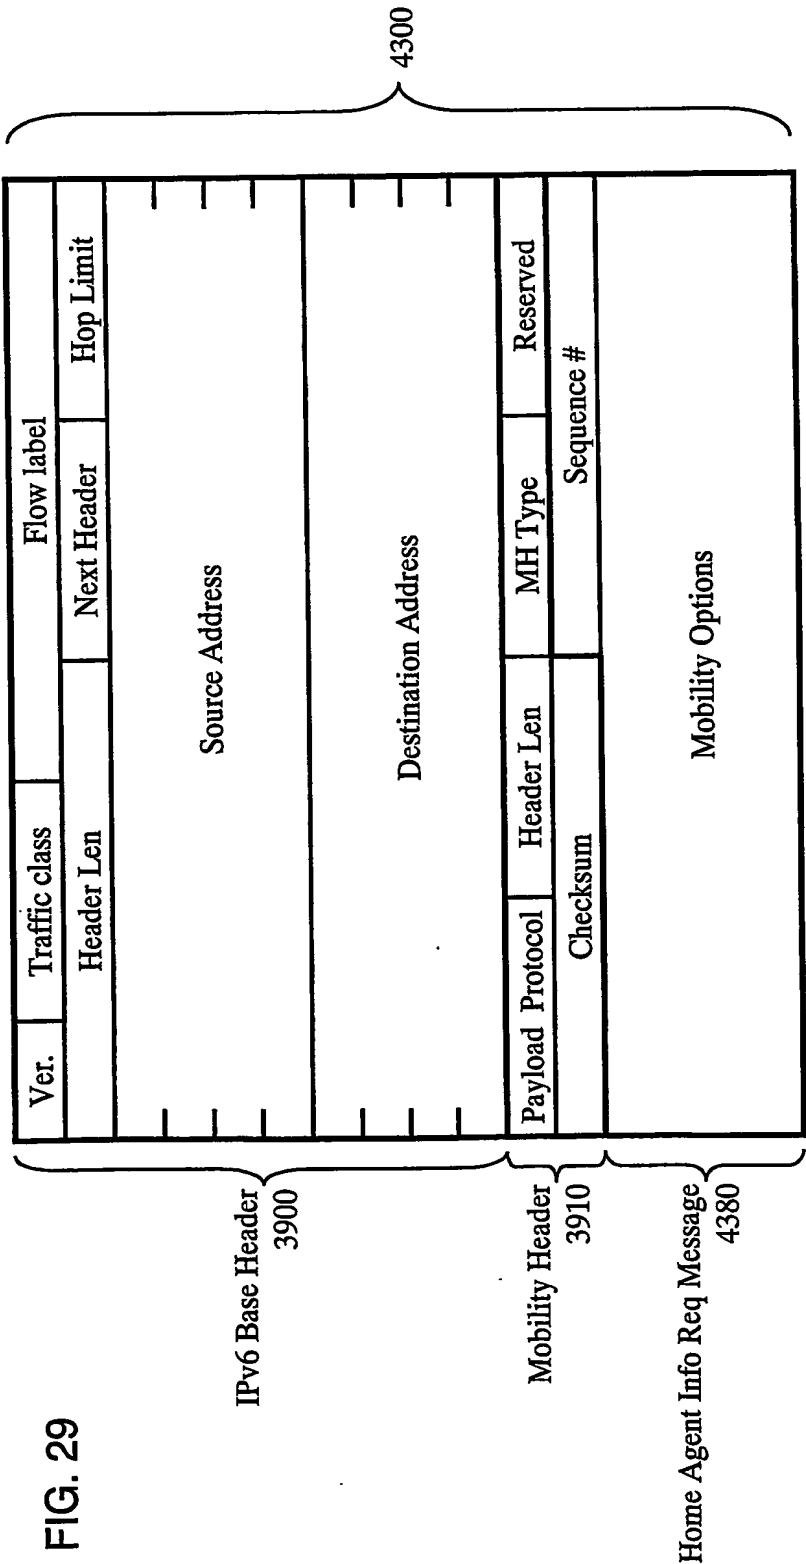



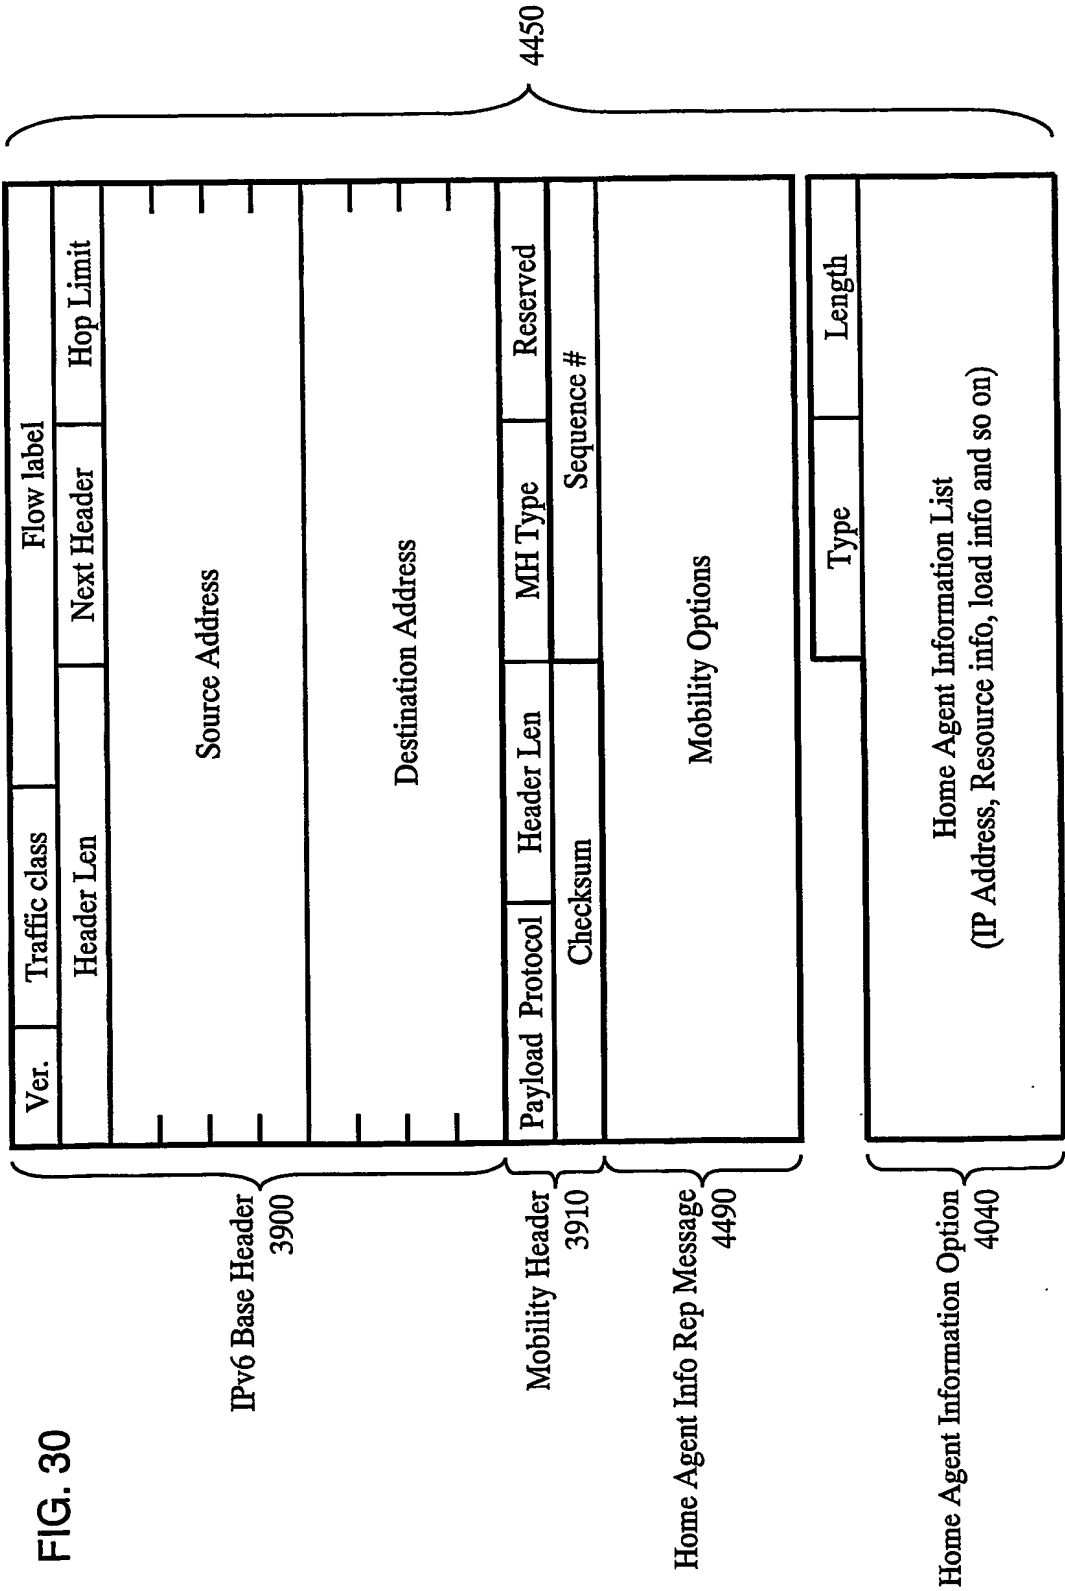



FIG. 31

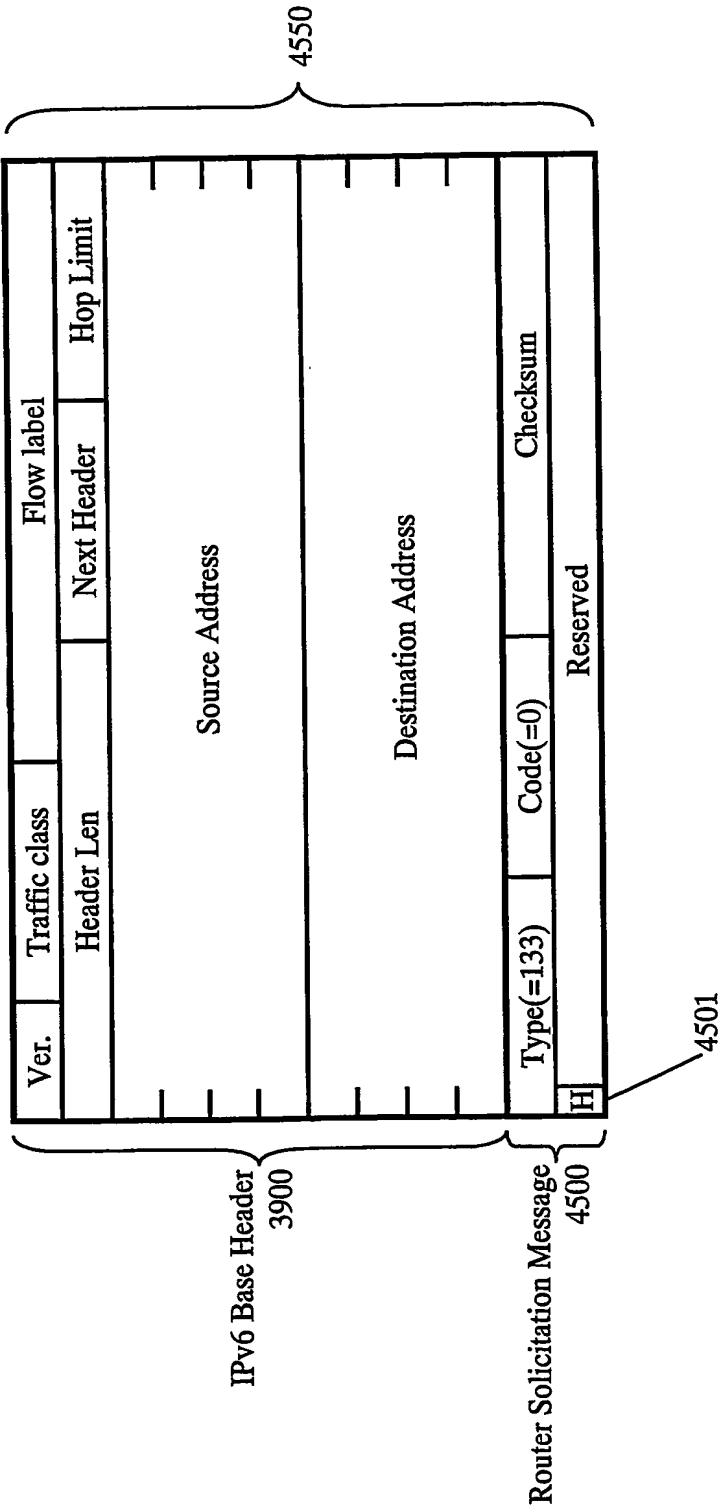

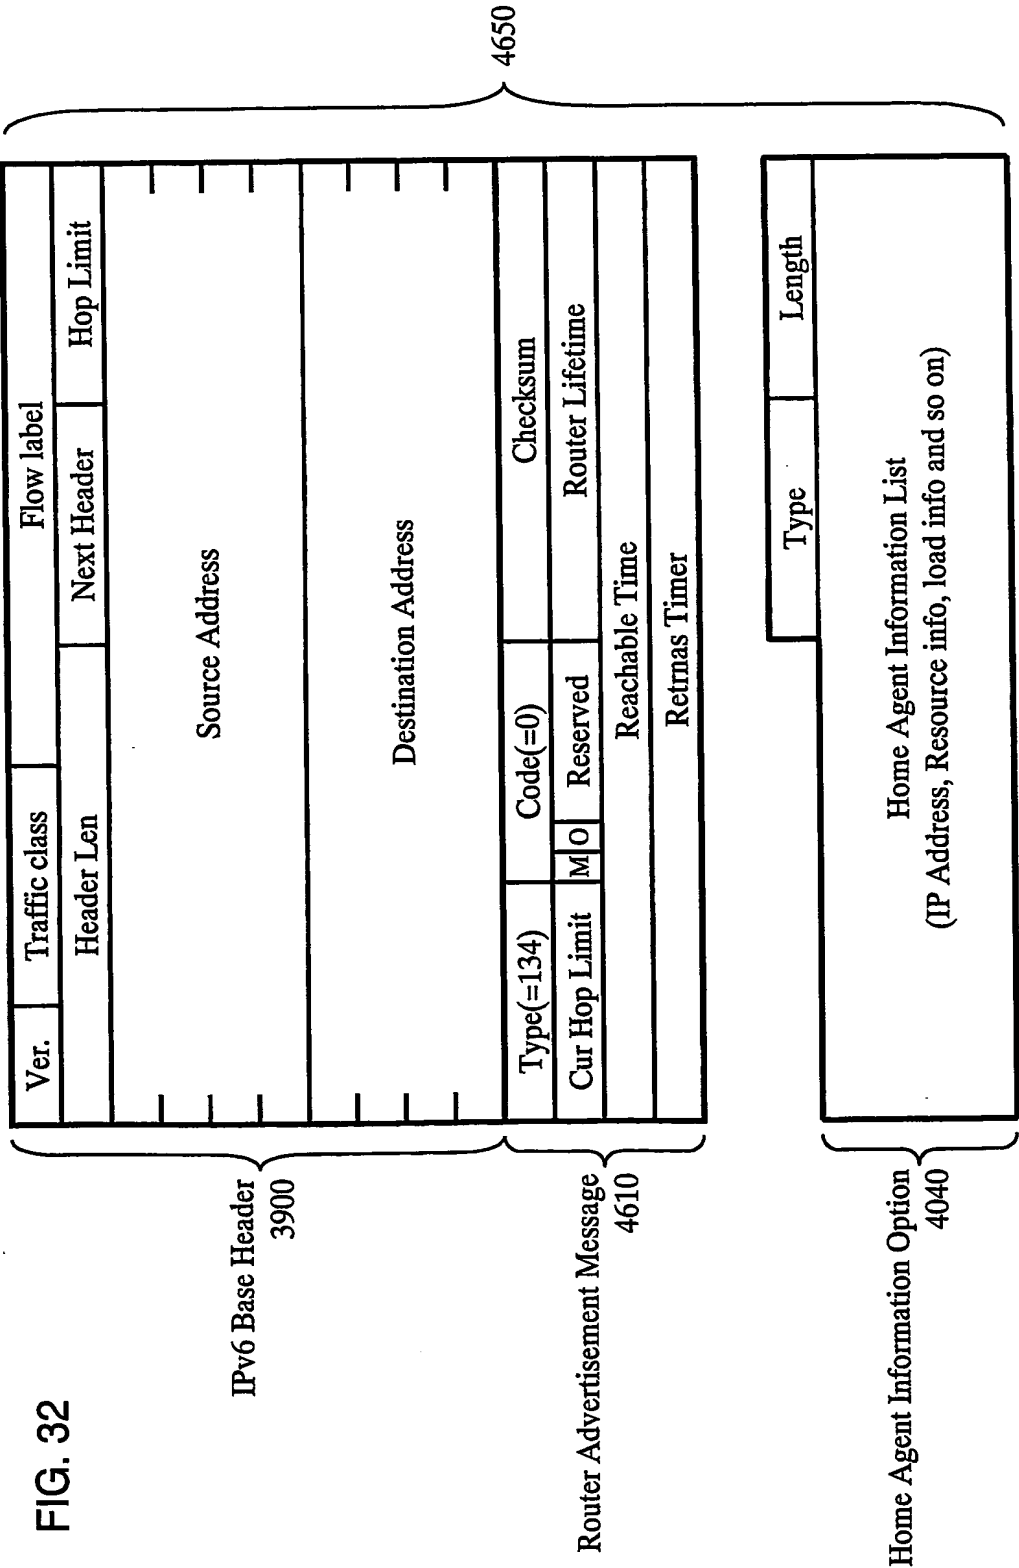

33/35

FIG.33

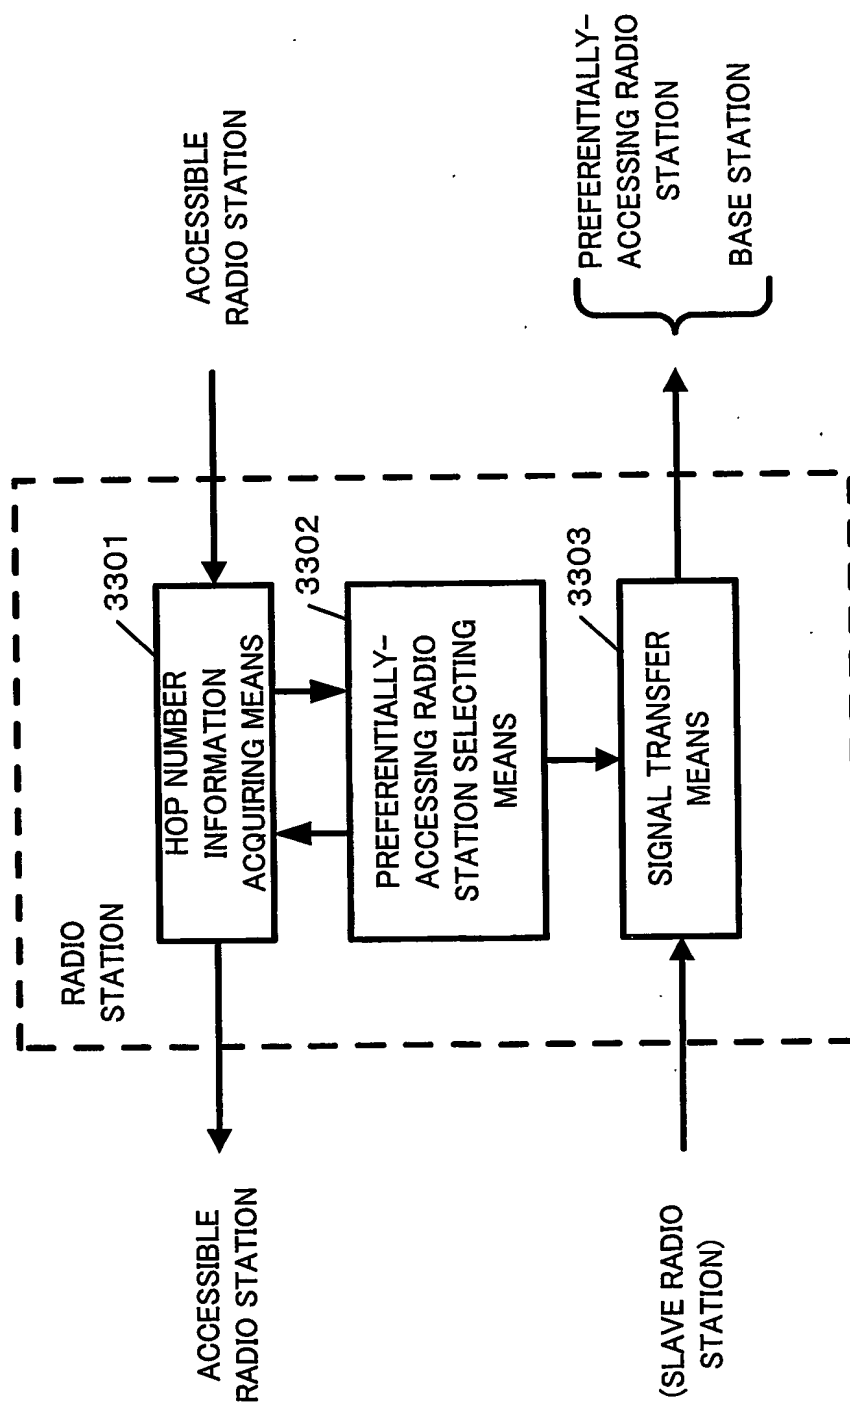

34/35

LIST OF DRAWING REFERENCE NUMBERS

10 MOBILE NODE

11,14,20 HOME AGENT

12,15 ACCESS ROUTER

13,16 RESPECTIVE RANGE

17 CORRESPONDENT NODE

18 IP NETWORK

19 HOME AGENT INFORMATION STORING SERVER

1100,1200 COMMUNICATING SECTION

1101,1201,1208,1301,1401 DATA LINK INTERFACE

1102,1202 IP PROCESSING SECTION

1103,1403 UPPER LAYER INTERFACE

1106,1205,1305 HOP NUMBER MEASURING SECTION

1104 HOME AGENT SELECTING SECTION

1108,1207 COMMUNICATION DELAY TIME MEASURING SECTION

1107,1206,1306,1406 HOME AGENT INFORMATION ACQUIRING SECTION

1105,1203,1303,1404 HOME AGENT INFORMATION STORING SECTION

1110,1407 APPLICATION SECTION

1204,1304,1405 HOME AGENT INFORMATION NOTIFYING SECTION

1210,1300,1400 NETWORK INTERFACE

1302,1402 IP PROCESSING SECTION

1307 COMMUNICATION DELAY TIME MEASURING SECTION

2508 HOP-NUMBER/COMMUNICATION-DELAY-TIME MEASURING SECTION

3301 HOP NUMBER INFORMATION ACQUIRING MEANS

3302 PREFERENTIALLY-ACCESSING RADIO STATION SELECTING MEANS

3303 SIGNAL TRANSFER MEANS

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
23 October 2003 (23.10.2003)

PCT

(10) International Publication Number
WO 2003/088615 A3

(51) International Patent Classification⁷: **H04L 29/06**

(21) International Application Number:
PCT/JP2003/004898

(22) International Filing Date: 17 April 2003 (17.04.2003)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
2002-115861 18 April 2002 (18.04.2002) JP
2003-108846 14 April 2003 (14.04.2003) JP

(71) Applicant (for all designated States except US): **MAT-SUSHITA ELECTRIC INDUSTRIAL CO., LTD.** [JP/JP]; 1006, Oaza Kadoma, Kadoma-shi, Osaka 571-8501 (JP).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **FUNABIKI, Makoto** [JP/JP]; 3-33-17, Sugao, Miyamae-ku, Kawasaki-shi, Kanagawa 216-0015 (JP). **IKEDA, Shinkichi** [JP/JP]; 11-5-105, Omaru, Tsuzuki-ku, Yokohama-shi, Kanagawa 224-0061 (JP). **MATSUMOTO,**

Taisuke [JP/JP]; 2-12-14-705, Kitasaiwai, Nishi-ku, Yokohama-shi, Kanagawa 220-0004 (JP). **KIMURA, Yasunari** [JP/JP]; 34-19-G309, Chigusadai, Aoba-ku, Yokohama-shi, Kanagawa 227-0051 (JP). **KOBAYASHI, Hirokazu** [JP/JP]; 224-1-102, Gorikida, Asao-ku, Kawasaki-shi, Kanagawa 215-0025 (JP).


(74) Agents: **IWAHASHI, Fumio** et al.; c/o Matsushita Electric Industrial Co., Ltd., 1006, Oaza Kadoma, Kadoma-shi, Osaka 571-8501 (JP).

(81) Designated States (national): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(84) Designated States (regional): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE,

[Continued on next page]

(54) Title: MOBILE NODE, ROUTER, SERVER AND METHOD FOR MOBILE COMMUNICATIONS UNDER IP VERSION 6 (IPV6) PROTOCOL

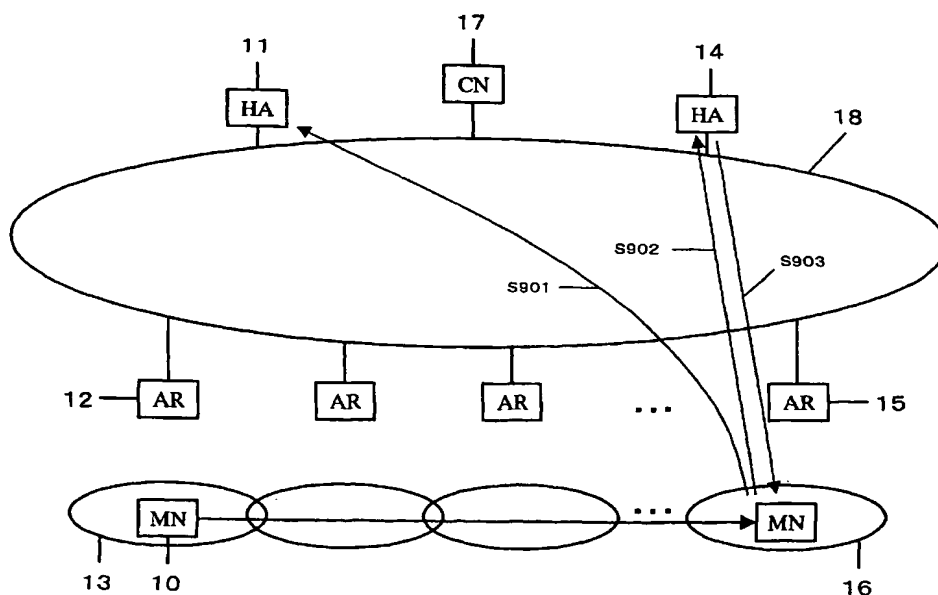

(57) Abstract: In a mobile communication system supported with IP version 6, a mobile node (10) measures at least one of a hop number or communication delay time to a belonging home agent (11). When the result of measurement is equal to or greater than a predetermined value, registration deletion is requested to the belonging home agent (11) while registration is requested to a new home agent (14). The belonging home agent (11) deletes the registration of mobile node (10), and the new home agent (14) registers the mobile node. This can reduce the load on an IP network (18) and decrease data delay.



ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO,
SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM,
GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

(88) Date of publication of the international search report:
29 April 2004

Published:

— with international search report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

INTERNATIONAL SEARCH REPORT

International Application No

PCT/JP 03/04898

A. CLASSIFICATION OF SUBJECT MATTER

IPC 7 H04L29/06

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 H04L

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, PAJ

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	<p>EP 1 134 991 A (NOKIA CORP) 19 September 2001 (2001-09-19) abstract paragraph [0002] - paragraph [0006] paragraph [0017] - paragraph [0025] paragraph [0039] - paragraph [0041]; figures 2-4</p> <p style="text-align: center;">----- -/--</p>	<p>1-8, 25-30</p>

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

* Special categories of cited documents :

- "A" document defining the general state of the art which is not considered to be of particular relevance
- "E" earlier document but published on or after the international filing date
- "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- "O" document referring to an oral disclosure, use, exhibition or other means
- "P" document published prior to the international filing date but later than the priority date claimed

- "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- "&" document member of the same patent family

Date of the actual completion of the international search

9 October 2003

Date of mailing of the international search report

30. 12. 03

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Buhleier, R

INTERNATIONAL SEARCH REPORT

International Application No

PCT/JP 03/04898

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category °	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	<p>BHATTACHARJEE S ET AL: "Application-layer anycasting" INFOCOM '97. SIXTEENTH ANNUAL JOINT CONFERENCE OF THE IEEE COMPUTER AND COMMUNICATIONS SOCIETIES. DRIVING THE INFORMATION REVOLUTION., PROCEEDINGS IEEE KOBE, JAPAN 7-11 APRIL 1997, LOS ALAMITOS, CA, USA, IEEE COMPUT. SOC, US, 7 April 1997 (1997-04-07), pages 1388-1396, XP010251961 ISBN: 0-8186-7780-5 page 1388, line 1 - page 1393, last line ; figures 1-3</p>	1-8, 25-30
A	<p>----- HEISSENHUBER F ET AL: "HOME AGENT REDUNDANCY AND LOAD BALANCING IN MOBILE IPV6" BROADBAND COMMUNICATIONS. PROCEEDINGS OF THE INTERNATIONAL IFIP-IEEE CONFERENCE ON BROADBAND COMMUNICATIONS, XX, XX, 10 November 1999 (1999-11-10), pages 235-244, XP009002035 abstract 1. Introduction - 2. Home Agent Load Balancing Mechanism page 235 - page 237</p>	1-8, 25-30
A	<p>----- WO 98/57275 A (KAVAK NAIL ; TELIA AB (SE)) 17 December 1998 (1998-12-17) page 3, line 15 - line 20 page 5, line 10 - line 14 page 5, line 34 - page 8, line 12 figure 2</p>	1-8, 25-30
A	<p>----- PARK V D ET AL: "Anycast routing for mobile networking" MILITARY COMMUNICATIONS CONFERENCE PROCEEDINGS, 1999. MILCOM 1999. IEEE ATLANTIC CITY, NJ, USA 31 OCT.-3 NOV. 1999, PISCATAWAY, NJ, USA, IEEE, US, 31 October 1999 (1999-10-31), pages 1-5, XP010369528 ISBN: 0-7803-5538-5 page 1 - page 4, left-hand column, last line ; figures 3,5</p> <p>----- -/--</p>	1-8, 25-30

INTERNATIONAL SEARCH REPORT

International Application No

PCT/JP 03/04898

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No. . .
A	D. JOHNSON, S. DEERING: "Reserved IPv6 Subnet Anycast Addresses (RFC 2526)" IETF NETWORK WORKING GROUP (RFC 2526), [Online] March 1999 (1999-03), pages 1-7, XP002257008 Retrieved from the Internet: <URL:http://rfc-editor.org> [retrieved on 2003-09-30] page 1, line 1 - page 2, line 10 page 4, paragraph 4. -----	1-8, 25-30
A	PERKINS C E ET AL: "MOBILITY SUPPORT IN IPV6" MOBICOM. PROCEEDINGS OF THE ANNUAL INTERNATIONAL CONFERENCE ON MOBILE COMPUTING AND NETWORKING, XX, XX, November 1996 (1996-11), pages 1-11, XP002901803 the whole document -----	1-8, 25-30

INTERNATIONAL SEARCH REPORT

International application No.
PCT/JP 03/04898

Box I Observations where certain claims were found unsearchable (Continuation of item 1 of first sheet)

This International Search Report has not been established in respect of certain claims under Article 17(2)(a) for the following reasons:

1. ☐ Claims Nos.:
because they relate to subject matter not required to be searched by this Authority, namely:
2. ☐ Claims Nos.:
because they relate to parts of the International Application that do not comply with the prescribed requirements to such an extent that no meaningful International Search can be carried out, specifically:
3. ☐ Claims Nos.:
because they are dependent claims and are not drafted in accordance with the second and third sentences of Rule 6.4(a)..

Box II Observations where unity of invention is lacking (Continuation of item 2 of first sheet)

This International Searching Authority found multiple inventions in this international application, as follows:

see additional sheet

1. ☐ As all required additional search fees were timely paid by the applicant, this International Search Report covers all searchable claims.
2. ☐ As all searchable claims could be searched without effort justifying an additional fee, this Authority did not invite payment of any additional fee.
3. ☐ As only some of the required additional search fees were timely paid by the applicant, this International Search Report covers only those claims for which fees were paid, specifically claims Nos.:
4. ☒ No required additional search fees were timely paid by the applicant. Consequently, this International Search Report is restricted to the invention first mentioned in the claims; it is covered by claims Nos.:

1-8, 25-30

Remark on Protest

☐ The additional search fees were accompanied by the applicant's protest.

☐ No protest accompanied the payment of additional search fees.

FURTHER INFORMATION CONTINUED FROM PCT/ISA/ 210

This International Searching Authority found multiple (groups of) inventions in this international application, as follows:

1. claims: 1-8, 25-30

Mobile node and mobile communication node measuring hop numbers and delay times using ICMP echo requests and replies in communications to a home agent, changing the home agent if measurement values surmount predetermined values and registering the mobile node with new home agent.

2. claims: 9-11, 22, 23

Home agent for treating registration refusals when the home agent is deficient in unoccupied resources.

3. claims: 12-14

Home agent for treating registration refusals when a mobile node enters a pre-determined sub-network.

4. claims: 15-21, 24

Home agent, access router and home agent information storing server for notifying a changed-to home agent of an entry concerning a mobile node of a binding cache based on an address.

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/JP 03/04898

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
EP 1134991	A	19-09-2001	FI 20000574 A	14-09-2001
			EP 1134991 A2	19-09-2001
			US 2001021175 A1	13-09-2001

WO 9857275	A	17-12-1998	SE 507720 C2	06-07-1998
			EE 9900572 A	15-08-2000
			EP 1010102 A2	21-06-2000
			NO 995672 A	10-02-2000
			SE 9702239 A	06-07-1998
			WO 9857275 A2	17-12-1998
